



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2026_fp_base = 800

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_fp_peak = 817

CPU2026 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

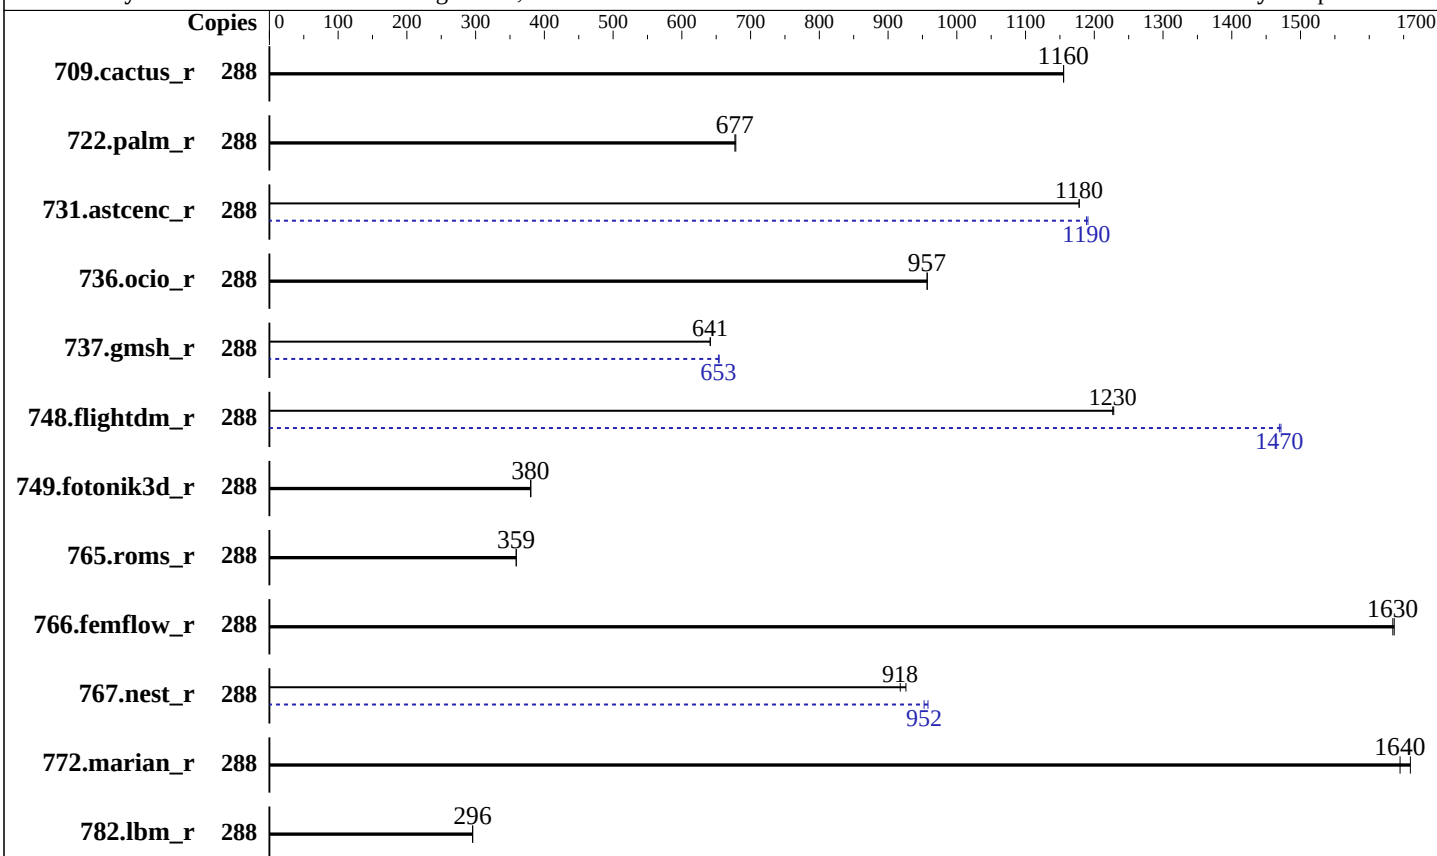

Hardware

CPU Name: Intel Xeon 6960E+
Max MHz: 3200
Nominal: 2400
Enabled: 288 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 64 KB I + 32 KB D on chip per core
L2: 144 MB I+D on chip per chip, 4 MB shared / 4 cores
L3: 432 MB I+D on chip per chip
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-8000B-R)
Storage: 1 x 3.84 TB NVME SSD
Cooling: Air
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP7
kernel 6.4.0-150700.51-default
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category: Vendor
Firmware: Version 7.10.25P94 released May-2026 BIOS
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: tcmalloc memory allocator v2.18.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2026_fp_base = 800

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_fp_peak = 817

CPU2026 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	288	<u>214</u>	<u>1160</u>	214	1160			288	<u>214</u>	<u>1160</u>	214	1160		
722.palm_r	288	560	678	<u>561</u>	<u>677</u>			288	560	678	<u>561</u>	<u>677</u>		
731.astcenc_r	288	205	1180	<u>205</u>	<u>1180</u>			288	<u>204</u>	<u>1190</u>	203	1190		
736.ocio_r	288	<u>263</u>	<u>957</u>	263	957			288	<u>263</u>	<u>957</u>	263	957		
737.gmsh_r	288	<u>206</u>	<u>641</u>	206	642			288	202	654	<u>202</u>	<u>653</u>		
748.flightdm_r	288	<u>168</u>	<u>1230</u>	168	1230			288	140	1470	<u>140</u>	<u>1470</u>		
749.fotonik3d_r	288	875	380	<u>877</u>	<u>380</u>			288	875	380	<u>877</u>	<u>380</u>		
765.roms_r	288	<u>1264</u>	<u>359</u>	1263	359			288	<u>1264</u>	<u>359</u>	1263	359		
766.femflow_r	288	<u>259</u>	<u>1630</u>	258	1640			288	<u>259</u>	<u>1630</u>	258	1640		
767.nest_r	288	247	926	<u>249</u>	<u>918</u>			288	<u>240</u>	<u>952</u>	238	958		
772.marian_r	288	274	1660	<u>276</u>	<u>1640</u>			288	274	1660	<u>276</u>	<u>1640</u>		
782.lbm_r	288	558	296	<u>558</u>	<u>296</u>			288	558	296	<u>558</u>	<u>296</u>		

SPECrate®2026_fp_base = **800**

SPECrate®2026_fp_peak = **817**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/spec2026/lib"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2026_fp_base = 800

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_fp_peak = 817

CPU2026 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

General Notes (Continued)

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

tcmalloc, a fast, multithreaded malloc implementation

built with the CentOS Stream 9, and the system compiler gcc 11.5.0

sources available from github.com/gperftools/gperftools

Platform Notes

BIOS Settings:

SNC = Enable

ACPI C6x Enumeration = C6 as ACPI C2

Latency Optimized Mode = Enabled

BMC Settings:

Fan mode = powerful mode

Sysinfo program /home/spec2026/bin/sysinfo

Rev: 779ab21020787073335a329f3a45e2cd

running on localhost Sat Sep 5 05:12:30 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srvn
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2026_fp_base = 800

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_fp_peak = 817

CPU2026 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged

19. OS release

20. Disk information

21. /sys/devices/virtual/dmi/id

22. dmidecode

23. BIOS

1. uname -srvnm

Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611/lp) x86_64

2. w

```
05:12:30 up 3:41, 1 user, load average: 83.55, 219.28, 253.35
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -             01:36    3:34m  1.80s  0.02s -bash
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 6190122
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6190122
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2026_fp_base = 800

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_fp_peak = 817

CPU2026 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

Platform Notes (Continued)

```
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 288 -c
ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429_revB.cfg --define smt-on --define peakfpcopies=144
--define physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
-o all fprate
```

```
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 288 --configfile
ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429_revB.cfg --define smt-on --define peakfpcopies=144
--define physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
--output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2026.019/templogs/preenv.fprate.019.0.log --lognum 019.0
--from_runcpu 2
```

```
specperl $SPEC/bin/sysinfo
```

```
$SPEC = /home/spec2026
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6960E+
vendor_id       : GenuineIntel
cpu family      : 6
model           : 221
stepping        : 1
microcode       : 0x11000120
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 144
siblings        : 144
2 physical ids (chips)
288 processors (hardware threads)
physical id 0:  core ids 0-47,128-175,256-303
physical id 1:  core ids 0-47,128-175,256-303
physical id 0:  apicids
```

```
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72
, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 290
, 292, 294, 296, 298, 300, 302, 304, 306, 308, 310, 312, 314, 316, 318, 320, 322, 324, 326, 328, 330, 332, 334, 336, 338, 340, 342,
344, 346, 348, 350, 512, 514, 516, 518, 520, 522, 524, 526, 528, 530, 532, 534, 536, 538, 540, 542, 544, 546, 548, 550, 552, 554, 5
56, 558, 560, 562, 564, 566, 568, 570, 572, 574, 576, 578, 580, 582, 584, 586, 588, 590, 592, 594, 596, 598, 600, 602, 604, 606
physical id 1:  apicids
```

```
1024, 1026, 1028, 1030, 1032, 1034, 1036, 1038, 1040, 1042, 1044, 1046, 1048, 1050, 1052, 1054, 1056, 1058, 1060, 1062, 1064,
1066, 1068, 1070, 1072, 1074, 1076, 1078, 1080, 1082, 1084, 1086, 1088, 1090, 1092, 1094, 1096, 1098, 1100, 1102, 1104, 1106,
1108, 1110, 1112, 1114, 1116, 1118, 1280, 1282, 1284, 1286, 1288, 1290, 1292, 1294, 1296, 1298, 1300, 1302, 1304, 1306, 1308,
1310, 1312, 1314, 1316, 1318, 1320, 1322, 1324, 1326, 1328, 1330, 1332, 1334, 1336, 1338, 1340, 1342, 1344, 1346, 1348, 1350,
1352, 1354, 1356, 1358, 1360, 1362, 1364, 1366, 1368, 1370, 1372, 1374, 1536, 1538, 1540, 1542, 1544, 1546, 1548, 1550, 1552,
1554, 1556, 1558, 1560, 1562, 1564, 1566, 1568, 1570, 1572, 1574, 1576, 1578, 1580, 1582, 1584, 1586, 1588, 1590, 1592, 1594,
1596, 1598, 1600, 1602, 1604, 1606, 1608, 1610, 1612, 1614, 1616, 1618, 1620, 1622, 1624, 1626, 1628, 1630
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2026_fp_base = 800

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_fp_peak = 817

CPU2026 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

Platform Notes (Continued)

From lscpu from util-linux 2.40.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 48 bits virtual
Byte Order:	Little Endian
CPU(s):	288
On-line CPU(s) list:	0-287
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) 6960E+
CPU family:	6
Model:	221
Thread(s) per core:	1
Core(s) per socket:	144
Socket(s):	2
Stepping:	1
CPU(s) scaling MHz:	29%
CPU max MHz:	3200.0000
CPU min MHz:	800.0000
BogoMIPS:	4800.00

Flags:

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon bts rep_good nopl
xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap
clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req vnmi umip pku ospke waitpkg gfni
vaes vpclmulqdq tme rdpid bus_lock_detect cldemote movdiri movdir64b
enqcmd fsrm md_clear serialize pconfig arch_lbr ibt flush_l1d
arch_capabilities

Virtualization:	VT-x
L1d cache:	9 MiB (288 instances)
L1i cache:	18 MiB (288 instances)
L2 cache:	288 MiB (72 instances)
L3 cache:	864 MiB (2 instances)
NUMA node(s):	6
NUMA node0 CPU(s):	0-47
NUMA node1 CPU(s):	48-95
NUMA node2 CPU(s):	96-143
NUMA node3 CPU(s):	144-191

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2026_fp_base = 800

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_fp_peak = 817

CPU2026 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

Platform Notes (Continued)

NUMA node4 CPU(s): 192-239
NUMA node5 CPU(s): 240-287
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	9M	8	Data	1	64	1	64
L1i	64K	18M	8	Instruction	1	128	1	64
L2	4M	288M	16	Unified	2	4096	1	64
L3	432M	864M	16	Unified	3	442368	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 6 nodes (0-5)

node 0 cpus: 0-47

node 0 size: 257502 MB

node 0 free: 244998 MB

node 1 cpus: 48-95

node 1 size: 257996 MB

node 1 free: 246169 MB

node 2 cpus: 96-143

node 2 size: 258035 MB

node 2 free: 246124 MB

node 3 cpus: 144-191

node 3 size: 258035 MB

node 3 free: 246289 MB

node 4 cpus: 192-239

node 4 size: 258035 MB

node 4 free: 245657 MB

node 5 cpus: 240-287

node 5 size: 257956 MB

node 5 free: 246174 MB

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2026_fp_base = 800

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_fp_peak = 817

CPU2026 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

Platform Notes (Continued)

node distances:

node	0	1	2	3	4	5
0:	10	15	17	21	28	26
1:	15	10	15	23	26	23
2:	17	15	10	26	23	21
3:	21	28	26	10	15	17
4:	23	26	23	15	10	15
5:	26	23	21	17	15	10

9. /proc/meminfo

MemTotal: 1584702144 kB

10. who -r

run-level 3 Sep 5 01:32

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

Default	Target	Status
multi-user		degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* sep5.service	loaded	failed	failed	systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth chronyd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs autoyast-init-scripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info firewallld fsidd gnome-remote-desktop gpm grub2-once haveged ipmi ipmi-evd issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind rpmconfigcheck rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd-generate-opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect	pcscd saned@ systemd-userdbd wickedd

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2026_fp_base = 800

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_fp_peak = 817

CPU2026 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

Platform Notes (Continued)

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=0ae3eb24-ab4b-4b8e-874e-74e44871a98f
splash=silent
resume=/dev/disk/by-uuid/ee1f2cac-1352-4dc9-8ca2-e927f2abe04e
mitigations=auto
quiet
security=apparmor
```

15. cpupower frequency-info

analyzing CPU 19:

current policy: frequency should be within 800 MHz and 3.20 GHz.
The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag      always defer+madvice [madvice] never
enabled     [always] madvice never
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2026_fp_base = 800

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_fp_peak = 817

CPU2026 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

Platform Notes (Continued)

hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

20. Disk information

SPEC is set to: /home/spec2026

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p3	xfs	3.0T	670G	2.4T	23%	/home

21. /sys/devices/virtual/dmi/id

Vendor: H3C
Product: R4900 G7 AP
Product Family: Rack
Serial: 210235A5QEH202606251

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Hynix HMC94CMBRA772N 64 GB 2 rank 8000

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 7.10.25P94
BIOS Date: 05/28/2026

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2026_fp_base = 800

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_fp_peak = 817

CPU2026 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

Platform Notes (Continued)

BIOS Revision: 5.35

Firmware Revision: 3.1

Compiler Version Notes

=====
C | 782.lbm_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====
C++ | 731.astcenc_r(base, peak) 736.ocio_r(base, peak)
| 748.flightdm_r(base, peak) 766.femflow_r(base, peak)
767.nest_r(base, peak) 772.marian_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====
C++, C | 709.cactus_r(base, peak) 737.gmsh_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====
Fortran | 722.palm_r(base, peak) 749.fotonik3d_r(base, peak) 765.roms_r(base,
peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2026_fp_base = 800

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_fp_peak = 817

CPU2026 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

Base Portability Flags

737.gmsh_r: -fno-associative-math

Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500

-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse

-funroll-loops -qopt-mem-layout-trans=4

-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

C++ benchmarks:

-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500

-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse

-funroll-loops -qopt-mem-layout-trans=4

-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

Fortran benchmarks:

-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500

-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse

-funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs

-align array32byte -auto -L/usr/local/tcmalloc-2.18.1/lib

-ltcmalloc_minimal

Benchmarks using both C and C++:

-m64 -std=c++17 -std=c18 -Wl,-z,muldefs

-Wl,-plugin-opt=-inline-threshold=1500 -xclearwaterforest -O3

-ffp-model=fast -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -L/usr/local/tcmalloc-2.18.1/lib

-ltcmalloc_minimal



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2026_fp_base = 800

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_fp_peak = 817

CPU2026 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

Peak Portability Flags

737.gmsh_r: -fno-associative-math

Peak Optimization Flags

C benchmarks:

782.lbm_r: basepeak = yes

C++ benchmarks:

731.astcenc_r: -m64 -std=c++17 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xclearwaterforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

736.ocio_r: basepeak = yes

748.flightdm_r: Same as 731.astcenc_r

766.femflow_r: basepeak = yes

767.nest_r: Same as 731.astcenc_r

772.marian_r: basepeak = yes

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2026_fp_base = 800

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_fp_peak = 817

CPU2026 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

Peak Optimization Flags (Continued)

Fortran benchmarks:

722.palm_r: basepeak = yes

749.fotonik3d_r: basepeak = yes

765.roms_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus_r: basepeak = yes

737.gmsh_r: -m64 -std=c++17 -std=c18 -Wl, -z, muldefs
-Wl, -plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xclearwaterforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html>

http://www.spec.org/cpu2026/results/flags/New_H3C-Platform-Settings-Intel-CWF-RevA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml>

http://www.spec.org/cpu2026/results/flags/New_H3C-Platform-Settings-Intel-CWF-RevA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-09-04 17:12:29-0400.

Report generated on 2026-09-23 13:08:10 by CPU2026 PDF formatter (unknown).

Originally published on 2026-09-22.