SPEC CPU®2026 Floating Point Speed Result

Compal Electronics, Inc.

SR224-2A
AMD EPYC 9965

SPECspeed®2026_fp_base = 17.7

SPECspeed®2026_fp_peak = 17.9

CPU2026 License:	6857	**Test Date:**	Aug-2026
Test Sponsor:	Compal Electronics, Inc.	**Hardware Availability:**	Jul-2025
Tested by:	Compal Electronics, Inc.	**Software Availability:**	May-2026

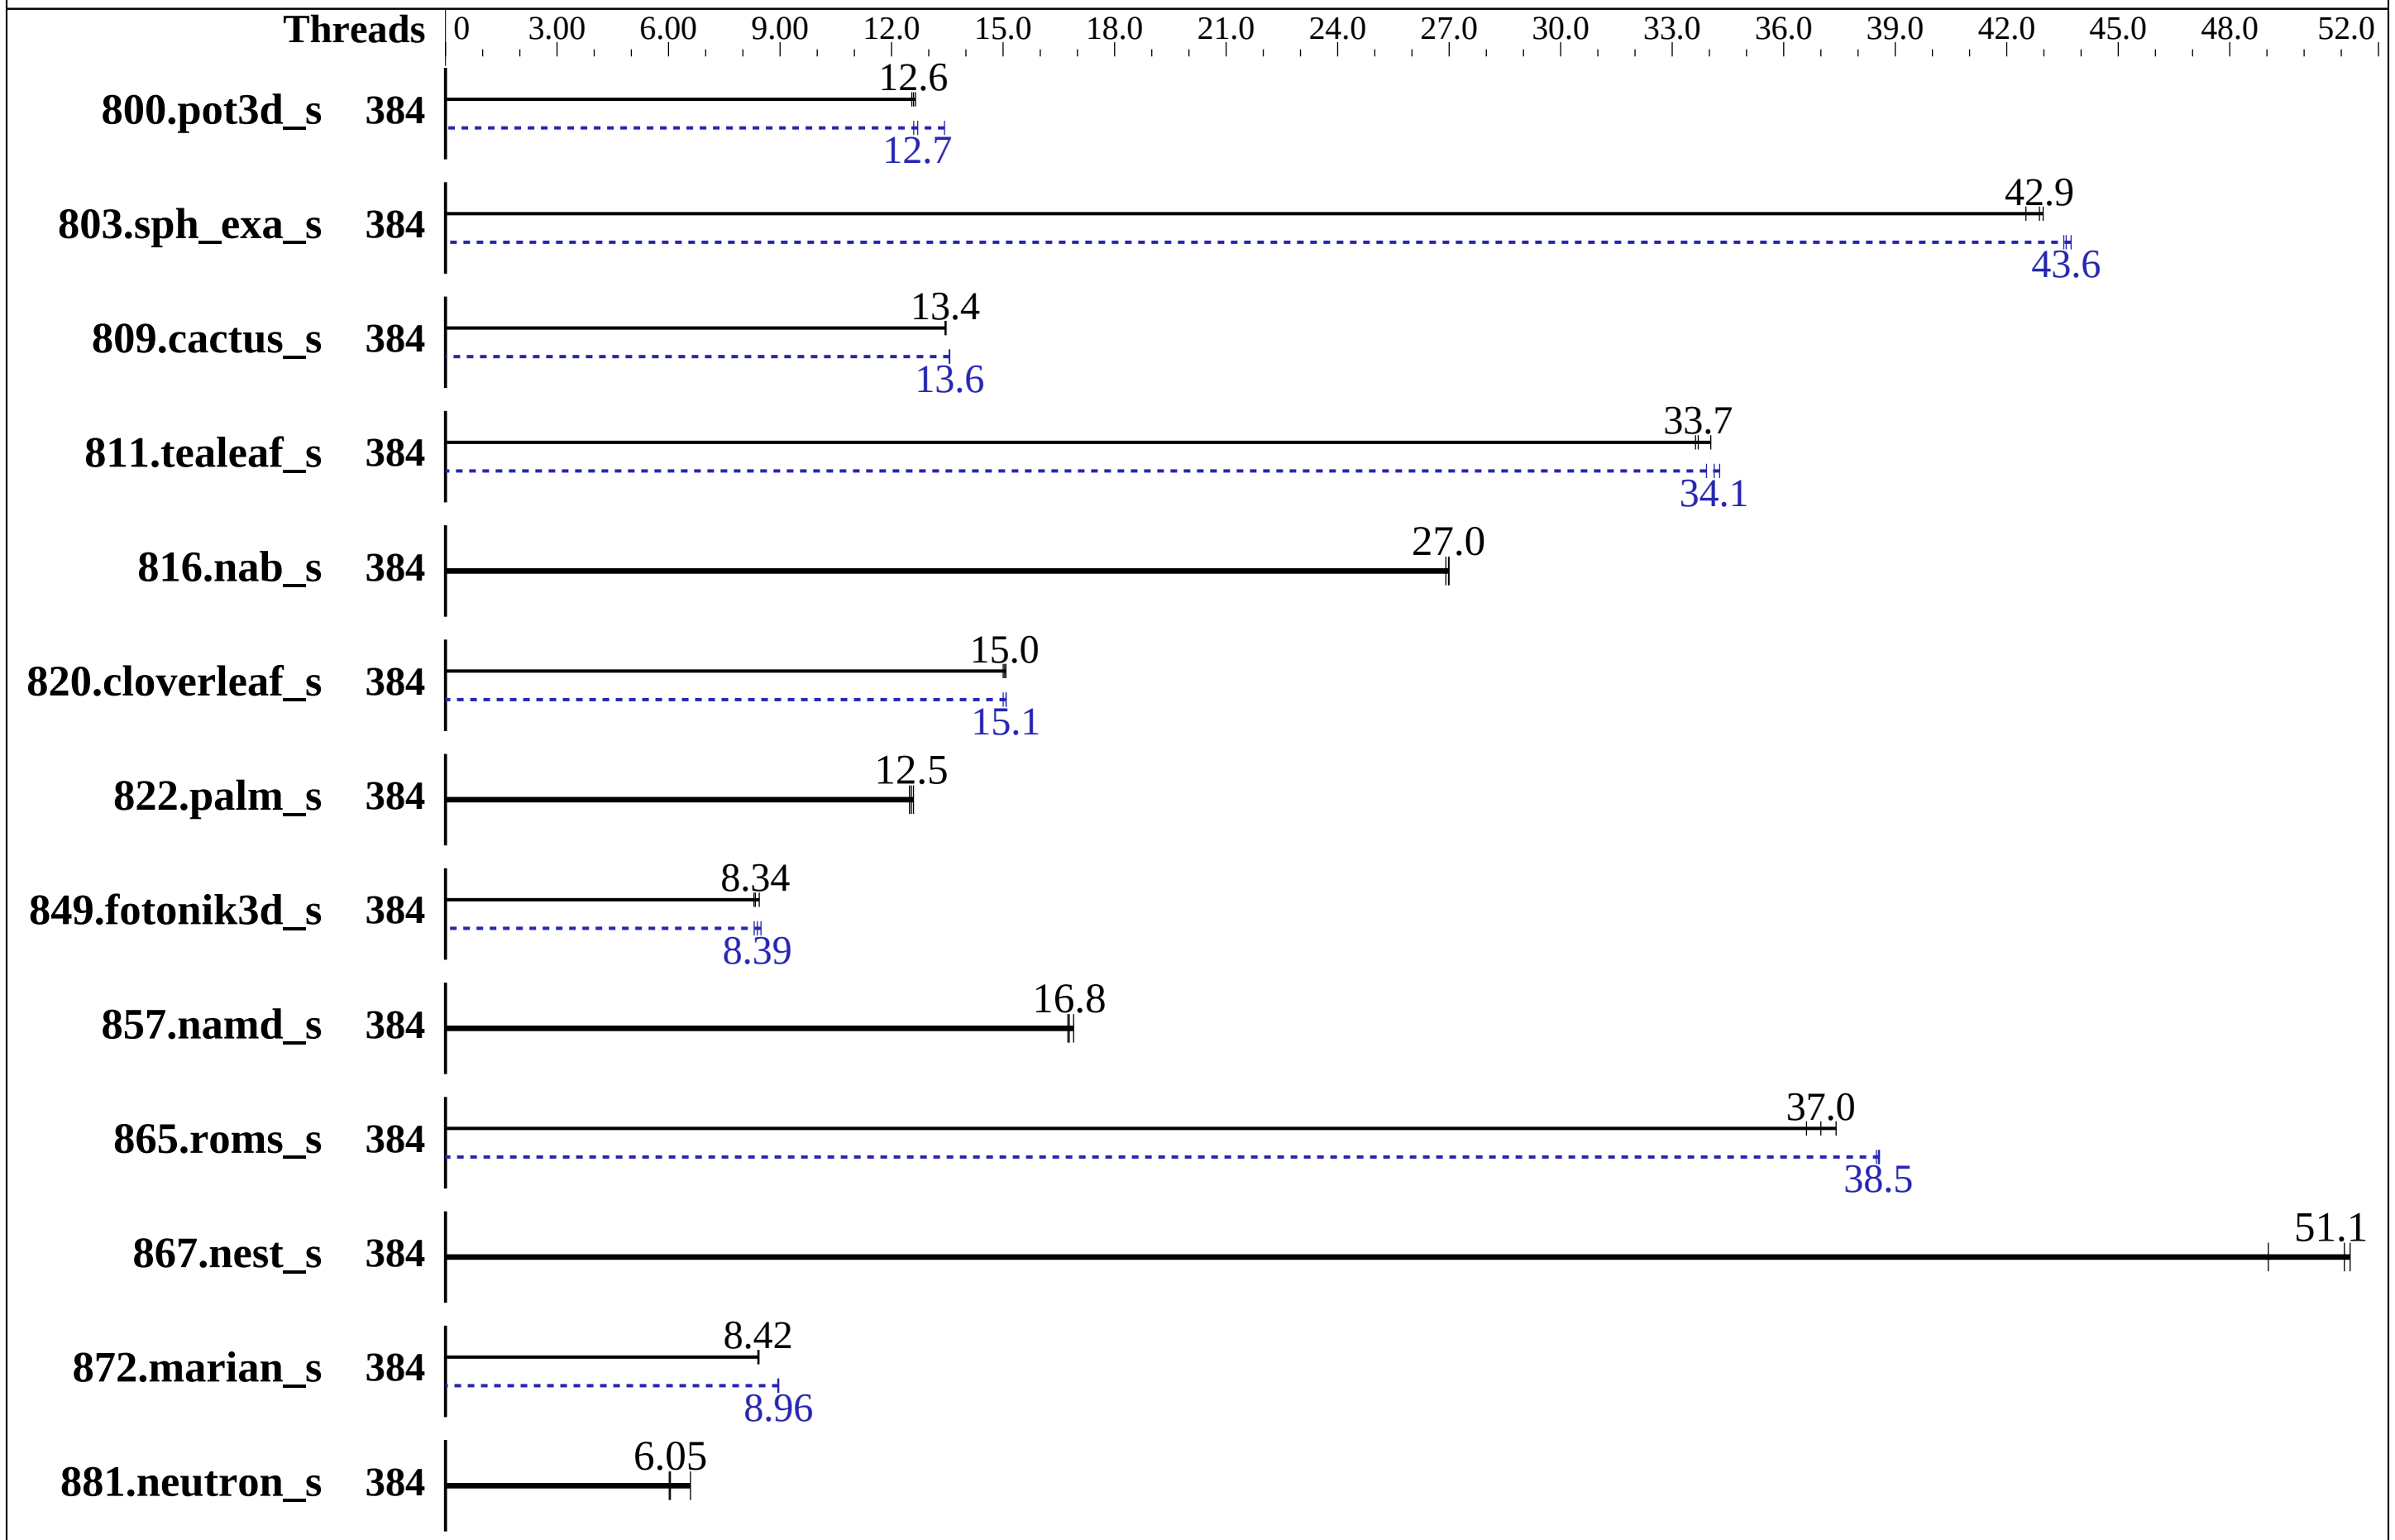

Hardware

CPU Name:	AMD EPYC 9965
Max MHz:	3700
Nominal:	2250
Enabled:	384 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 16 cores
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx8 PC5-6400B-R)
Storage:	1 x 3.84TB M.2 NVMe SSD
Cooling:	Air
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP7 kernel version 6.4.0-150700.51-default
Compiler:	C/C++: Version 5.2.0 of AOCC Fortran: Flang v22
Compiler Category:	Vendor
Firmware:	American Megatrends Version 10.28.00 released Jan-2026
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2026 Floating Point Speed Result

Compal Electronics, Inc.

SR224-2A
AMD EPYC 9965

SPECspeed®2026_fp_base = 17.7

SPECspeed®2026_fp_peak = 17.9

CPU2026 License: 6857
Test Sponsor: Compal Electronics, Inc.
Tested by: Compal Electronics, Inc.
Test Date: Aug-2026
Hardware Availability: Jul-2025
Software Availability: May-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	384	53.2	12.6	53.6	12.5	**53.5**	**12.6**	384	53.4	12.6	50.1	13.4	**53.0**	**12.7**
803.sph_exa_s	384	29.1	42.5	**28.9**	**42.9**	28.8	43.0	384	28.3	43.7	**28.4**	**43.6**	28.4	43.5
809.cactus_s	384	**83.4**	**13.4**	83.5	13.4	83.3	13.5	384	**82.7**	**13.6**	82.7	13.6	82.8	13.6
811.tealeaf_s	384	16.4	34.0	**16.5**	**33.7**	16.6	33.6	384	16.4	33.9	16.3	34.3	**16.3**	**34.1**
816.nab_s	384	**41.7**	**27.0**	41.7	27.0	41.8	26.9	384	**41.7**	**27.0**	41.7	27.0	41.8	26.9
820.cloverleaf_s	384	57.1	15.0	56.8	15.1	**57.0**	**15.0**	384	56.8	15.1	57.1	15.0	**56.8**	**15.1**
822.palm_s	384	97.5	12.6	**98.0**	**12.5**	98.4	12.5	384	97.5	12.6	**98.0**	**12.5**	98.4	12.5
849.fotonik3d_s	384	79.5	8.30	78.2	8.44	**79.2**	**8.34**	384	77.8	8.49	79.5	8.30	**78.7**	**8.39**
857.namd_s	384	**86.5**	**16.8**	86.7	16.7	85.9	16.9	384	**86.5**	**16.8**	86.7	16.7	85.9	16.9
865.roms_s	384	29.8	36.6	29.1	37.4	**29.5**	**37.0**	384	28.3	38.6	28.3	38.5	**28.3**	**38.5**
867.nest_s	384	42.2	51.2	**42.3**	**51.1**	44.0	49.0	384	42.2	51.2	**42.3**	**51.1**	44.0	49.0
872.marian_s	384	128	8.43	129	8.40	**129**	**8.42**	384	121	8.94	**121**	**8.96**	121	8.96
881.neutron_s	384	124	6.59	**135**	**6.05**	135	6.02	384	124	6.59	**135**	**6.05**	135	6.02

SPECspeed®2026_fp_base = 17.7

SPECspeed®2026_fp_peak = 17.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
Flang v22 is available at
https://flang.llvm.org/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
    numactl --physcpubind=0-15 runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
```

(Continued on next page)

Operating System Notes (Continued)

```
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

To disable Transparent Hugepages (THP) for 816.nab_s,865.roms_s=peak:
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo never > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-383"
LD_LIBRARY_PATH =
     "/cpu2026/amd_speed_aocc520_znver5_A_lib/lib:/cpu2026/amd_speed_aocc520_
     znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
OMP_THREAD_LIMIT = "384"
```

General Notes

```
Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB Memory using Ubuntu 24.04
```

Platform Notes

```
BIOS settings:
 TDP Control: Manual
 TDP: 500
 PPT Control: Manual
 PPT: 500
 NUMA Nodes Per Socket: NPS1
 SMT Control : disable
 Power Profile Selection : High Performance Mode
 ACPI CST C2 Latency : 18
 DF Cstates: Disabled
 DRAM Scrub Time: Disabled
 Global C-state Control: Disabled
 SVM mode: Disabled
 SR-IOV Support: Disabled
```

(Continued on next page)

Platform Notes (Continued)

```
Sysinfo program /cpu2026/bin/sysinfo
Rev: 779ab21020787073335a329f3a45e2cd
running on localhost Thu Aug 20 14:48:33 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

------------------------------------------------------------
2. w
   14:48:33 up  4:42,  4 users,  load average: 86.59, 55.53, 37.54
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     pts/0    192.168.68.2     10:07    4:36m  6.55s  5.51s python3
  ./run_amd_speed_aocc520_znver5_A1.py
  root     pts/1    192.168.68.2     10:08    4:39m  0.04s  0.04s -bash

------------------------------------------------------------
3. Username
```

(Continued on next page)

Platform Notes (Continued)

```
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 3093196
  max locked memory       (kbytes, -l) 2048
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 3093196
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
 python3 ./run_amd_speed_aocc520_znver5_A1.py
 runcpu --config amd_speed_aocc520_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
 runcpu --configfile amd_speed_aocc520_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /cpu2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9965 192-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 17
    stepping        : 0
    microcode       : 0xb101054
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
    TLB size        : 192 4K pages
    cpu cores       : 192
```

(Continued on next page)

Platform Notes (Continued)

```
    siblings        : 192
    2 physical ids (chips)
    384 processors (hardware threads)
    physical id 0: core ids 0-191
    physical id 1: core ids 0-191
    physical id 0: apicids 0-191
    physical id 1: apicids 256-447
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.40.4:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               384
   On-line CPU(s) list:                  0-383
   Vendor ID:                            AuthenticAMD
   Model name:                           AMD EPYC 9965 192-Core Processor
   CPU family:                           26
   Model:                                17
   Thread(s) per core:                   1
   Core(s) per socket:                   192
   Socket(s):                            2
   Stepping:                             0
   Frequency boost:                      enabled
   CPU(s) scaling MHz:                   100%
   CPU max MHz:                          3700.0000
   CPU min MHz:                          1200.0000
   BogoMIPS:                             4492.90
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                         rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                         extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                         sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                         cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                         osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                         perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                         ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                         smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                         avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                         xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                         cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                         xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
```

(Continued on next page)

Platform Notes (Continued)

```
                                       svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                       pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                                       vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                       avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                       movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                       flush_l1d debug_swap hv_inuse_wr_allowed srso_user_kernel_no
                                       amd_lbr_pmc_freeze
  L1d cache:                           18 MiB (384 instances)
  L1i cache:                           12 MiB (384 instances)
  L2 cache:                            384 MiB (384 instances)
  L3 cache:                            768 MiB (24 instances)
  NUMA node(s):                        2
  NUMA node0 CPU(s):                   0-191
  NUMA node1 CPU(s):                   192-383
  Vulnerability Gather data sampling:  Not affected
  Vulnerability Itlb multihit:         Not affected
  Vulnerability L1tf:                  Not affected
  Vulnerability Mds:                   Not affected
  Vulnerability Meltdown:              Not affected
  Vulnerability Mmio stale data:       Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:              Not affected
  Vulnerability Spec rstack overflow:  Mitigation; IBPB on VMEXIT only
  Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:            Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                       disabled; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsx async abort:       Not affected

 From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K      18M   12 Data            1    64        1             64
     L1i       32K      12M    8 Instruction     1    64        1             64
     L2         1M     384M   16 Unified         2  1024        1             64
     L3        32M     768M   16 Unified         3 32768        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 2 nodes (0-1)
   node 0 cpus: 0-191
   node 0 size: 386516 MB
   node 0 free: 385106 MB
   node 1 cpus: 192-383
   node 1 size: 386811 MB
   node 1 free: 384031 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node distances:
  node   0   1
    0:  10  32
    1:  32  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       791887228 kB

------------------------------------------------------------
10. who -r
  run-level 3 Aug 20 10:06

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher YaST2-Firstboot YaST2-Second-Stage
                   apparmor appstream-sync-cache auditd bluetooth chronyd cron display-manager getty@
                   irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                   nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore
                   wpa_supplicant
  enabled-runtime  systemd-remount-fs
  disabled         NetworkManager-wait-online accounts-daemon autofs autoyast-initscripts blk-availability
                   bluetooth-mesh boot-sysctl ca-certificates chrony-wait console-getty cups cups-browsed
                   debug-shell dnsmasq ebtables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged
                   hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kdump kdump-early kdump-notify
                   kexec-load ksm kvm_stat lunmask man-db-create mariadb mariadb@ multipathd munge nfs
                   nfs-blkmap nmb ntp-wait ntpd ostree-remount ostree-state-overlay@ rpcbind rpmconfigcheck
                   rsyncd rtkit-daemon salt-minion samba-bgqd serial-getty@ slurmd smartd_generate_opts smb
                   snmpd snmptrapd speech-dispatcherd svnserve systemd-boot-check-no-failures systemd-confext
                   systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                   update-system-flatpaks upower vncserver@ wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                   wickedd-nanny wpa_supplicant@ ypbind
  indirect         systemd-userdbd wickedd
  masked           packagekit

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=03f2994f-ee68-4440-b1db-7d3f781cf8b4
  splash=silent
  mitigations=auto
```

(Continued on next page)

Platform Notes (Continued)

```
  quiet
  security=apparmor
  crashkernel=380M,high
  crashkernel=72M,low,
  amd_pstate=passive

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 194:
    current policy: frequency should be within 1.20 GHz and 3.70 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing                1
  kernel.randomize_va_space            0
  vm.compaction_proactiveness         20
  vm.dirty_background_bytes            0
  vm.dirty_background_ratio           10
  vm.dirty_bytes                       0
  vm.dirty_expire_centisecs         3000
  vm.dirty_ratio                       8
  vm.dirty_writeback_centisecs       500
  vm.dirtytime_expire_seconds      43200
  vm.extfrag_threshold               500
  vm.min_unmapped_ratio                1
  vm.nr_hugepages                      0
  vm.nr_hugepages_mempolicy            0
  vm.nr_overcommit_hugepages           0
  vm.swappiness                        1
  vm.watermark_boost_factor        15000
  vm.watermark_scale_factor           10
  vm.zone_reclaim_mode                 1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
```

(Continued on next page)

Platform Notes (Continued)

```
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
19. Disk information
SPEC is set to: /cpu2026
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 btrfs  1.0T   69G  954G   7% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         COMPAL
    Product:        COMPAL SERVER
    Product Family: COMPAL
    Serial:         7901567500001

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.7 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    24x Samsung M321R4GA3EB2-CCPKC 32 GIB 2 rank 6400


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      10.28.00
   BIOS Date:         01/29/2026
   BIOS Revision:     5.35
   Firmware Revision: 5.35
```

Compiler Version Notes

```
==============================================================================
C       | 811.tealeaf_s(base, peak) 816.nab_s(base, peak) 881.neutron_s(base,
        | peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.2.0-Build#2035 2026_04_10)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.2.0-4925-2035/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 803.sph_exa_s(base, peak) 857.namd_s(base, peak) 867.nest_s(base,
        | peak) 872.marian_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.2.0-Build#2035 2026_04_10)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.2.0-4925-2035/bin
------------------------------------------------------------------------------

==============================================================================
C++, C  | 809.cactus_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.2.0-Build#2035 2026_04_10)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.2.0-4925-2035/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 800.pot3d_s(base, peak) 820.cloverleaf_s(base, peak)
        | 822.palm_s(base, peak) 849.fotonik3d_s(base, peak) 865.roms_s(base,
        | peak)
------------------------------------------------------------------------------
flang version 22.1.0-rc2 (https://github.com/llvm/llvm-project
  a47b42eb9f9b302167b4fc413e6c92798d65dd0b)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/llvm/llvm-22.1.0-rc2/install/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

(Continued on next page)

Base Compiler Invocation (Continued)

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang-22`

Benchmarks using both C and C++:
`clang++ clang`

Base Portability Flags

800.pot3d_s: `-DSPEC_LP64`
803.sph_exa_s: `-DSPEC_LP64`
809.cactus_s: `-DSPEC_LP64`
811.tealeaf_s: `-DSPEC_LP64`
816.nab_s: `-DSPEC_LP64`
820.cloverleaf_s: `-DSPEC_LP64`
822.palm_s: `-DSPEC_LP64`
849.fotonik3d_s: `-DSPEC_LP64`
857.namd_s: `-DSPEC_LP64`
865.roms_s: `-DSPEC_LP64`
867.nest_s: `-fno-finite-math-only -DSPEC_LP64`
872.marian_s: `-DSPEC_LP64`
881.neutron_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt
-mrecip=none -fopenmp -DSPEC_OPENMP -lamdalloc -lamdlibm
-fopenmp=libomp -lomp
```

C++ benchmarks:
```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fopenmp -DSPEC_OPENMP
```

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-pthread -lamdalloc -lamdlibm -fopenmp=libomp -lomp

Fortran benchmarks:
-m64 -std=f2018 -O3 -flto -march=znver5 -fveclib=AMDLIBM
-ffast-math -funroll-loops -DSPEC_OPENMP -fopenmp
-fdo-concurrent-to-openmp=host -lamdalloc -lamdlibm -fopenmp=libomp
-lomp

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mrecip=none -fopenmp -DSPEC_OPENMP -pthread -lamdalloc -lamdlibm
-fopenmp=libomp -lomp

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang-22

Benchmarks using both C and C++:
clang++ clang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

811.tealeaf_s: -m64 -std=c18
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto
-march=znver5 -fveclib=AMDLIBM -ffast-math
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -fopenmp -DSPEC_OPENMP
-lamdalloc -lamdlibm -fopenmp=libomp -lomp

816.nab_s: basepeak = yes

881.neutron_s: basepeak = yes

C++ benchmarks:

803.sph_exa_s: -m64 -std=c++17
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -fopenmp -DSPEC_OPENMP
-pthread -lamdalloc -lamdlibm -fopenmp=libomp -lomp

857.namd_s: basepeak = yes

867.nest_s: basepeak = yes

872.marian_s: Same as 803.sph_exa_s

Fortran benchmarks:

800.pot3d_s: -m64 -std=f2018 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -funroll-loops
-DSPEC_OPENMP -fopenmp -fdo-concurrent-to-openmp=host
-lamdalloc -lamdlibm -fopenmp=libomp -lomp

(Continued on next page)

Peak Optimization Flags (Continued)

820.cloverleaf_s: `Same as 800.pot3d_s`

822.palm_s: `basepeak = yes`

849.fotonik3d_s: `Same as 800.pot3d_s`

865.roms_s: `Same as 800.pot3d_s`

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-mllvm -unroll-threshold=100 -fopenmp -DSPEC_OPENMP -pthread
-lamdalloc -lamdlibm -fopenmp=libomp -lomp

Peak Other Flags

C benchmarks (except as noted below):
-Wno-return-type -Wno-unused-command-line-argument

811.tealeaf_s: -Wno-return-type

Benchmarks using both C and C++:
-Wno-return-type

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/Compal-Platform-Flags-Linux-AMD_V1.9.html
http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-10-07.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/Compal-Platform-Flags-Linux-AMD_V1.9.xml
http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-10-07.xml

Tested with SPEC CPU®2026 v1.0.1 on 2026-08-20 02:48:32-0400.
Report generated on 2026-10-07 10:41:50 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-10-06.