



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9355, 3.55 GHz

SPECrate®2026_fp_base = 516

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19


Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

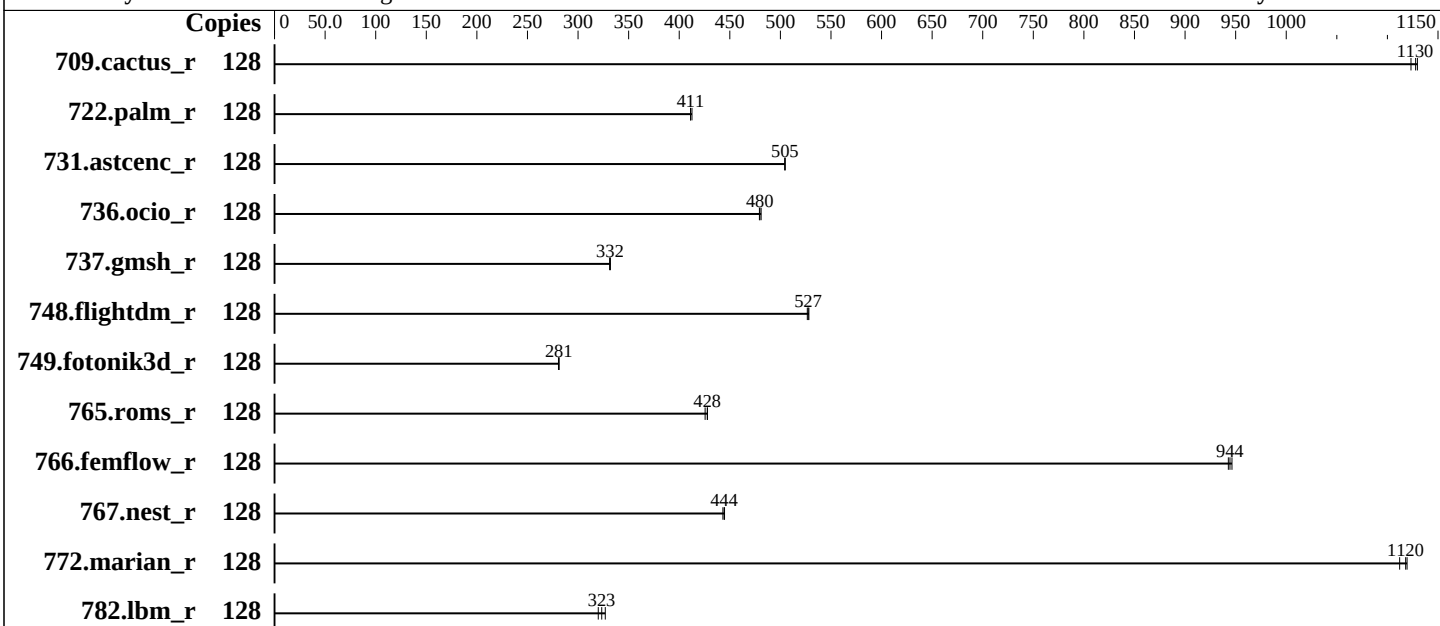

Hardware

CPU Name: AMD EPYC 9355
Max MHz: 4400
Nominal: 3550
Enabled: 64 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x SATA SSD, 1.92 TB
Cooling: Air
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel version 6.4.0-150600.23.22-default
C/C++/Fortran: Version 5.1.0 of AOCC
Compiler: Vendor
Compiler Category: Vendor
Firmware: Fujitsu BIOS Version V5.0.0.35 R2.13.0 for D4129-A1x. Released Aug-2026
tested as V5.0.0.35 R2.11.0 for D4129-A1x Jan-2026
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9355, 3.55 GHz

SPECrate®2026_fp_base = 516

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	128	97.2	1130	<u>97.4</u>	<u>1130</u>	97.8	1120							
722.palm_r	128	411	411	<u>411</u>	<u>411</u>	409	413							
731.astcenc_r	128	213	504	<u>213</u>	<u>505</u>	213	505							
736.ocio_r	128	233	481	<u>233</u>	<u>480</u>	234	479							
737.gmsh_r	128	177	331	<u>177</u>	<u>332</u>	177	332							
748.flightdm_r	128	<u>174</u>	<u>527</u>	174	528	174	527							
749.fotonik3d_r	128	527	281	526	281	<u>527</u>	<u>281</u>							
765.roms_r	128	474	426	<u>471</u>	<u>428</u>	471	428							
766.femflow_r	128	198	946	199	943	<u>199</u>	<u>944</u>							
767.nest_r	128	229	443	228	445	<u>228</u>	<u>444</u>							
772.marian_r	128	181	1120	182	1110	<u>181</u>	<u>1120</u>							
782.lbm_r	128	<u>227</u>	<u>323</u>	224	327	229	320							

SPECrate®2026_fp_base = 516

SPECrate®2026_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9355, 3.55 GHz

SPECrate®2026_fp_base = 516

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/Benchmark/cpu2026-1.0.1/amd_rate_aocc510_znver5_B_lib/lib:/home/Benchmark/cpu2026-1.0.1/amd_rate_aocc510_znver5_B_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04

Platform Notes

BIOS configuration:

Determinism Slider = Power

TDP Control = Manual

TDP Limit = 300

Package Power Limit Control = Manual

Package Power Limit = 300

Power Profile Selection = High Performance

NUMA nodes per socket = NPS4

Probe Filter Organization = Shared

Interleaving Region Size = 1K Region Size

FAN Control = Full

Sysinfo program /home/Benchmark/cpu2026-1.0.1/bin/sysinfo

Rev: 779ab21020787073335a329f3a45e2cd

running on localhost Tue Jun 16 23:49:00 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9355, 3.55 GHz

SPECrate®2026_fp_base = 516

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
-----
1. uname -srvmm
Linux 6.4.0-150600.23.22-default #1 SMP PREEMPT_DYNAMIC Fri Sep 13 10:42:50 UTC 2024 (5c05eeb) x86_64
```

```
-----
2. w
23:49:00 up 2:44, 1 user, load average: 59.57, 108.31, 119.89
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU WHAT
root      tty1      -             21:05       2:41m      2.00s   0.93s python3
./run_amd_rate_aocc510_znver5_B1_fprate.py
```

```
-----
3. Username
From environment variable $USER: root
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3090708
max locked memory       (kbytes, -l) 2048
max memory size         (kbytes, -m) unlimited
open files              (-n) 65536
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9355, 3.55 GHz

SPECrate®2026_fp_base = 516

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Platform Notes (Continued)

max user processes (-u) 3090708
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
python3 ./run_amd_rate_aocc510_znver5_B1_fprate.py
runcpu --config amd_rate_aocc510_znver5_B1.cfg --tune base --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc510_znver5_B1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/cpu2026-1.0.1
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9355 32-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb00215a
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 32
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0:  core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 1:  core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 0:  apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1:  apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:         Little Endian
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9355, 3.55 GHz

SPECrate®2026_fp_base = 516

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Platform Notes (Continued)

CPU(s): 128
On-line CPU(s) list: 0-127
Vendor ID: AuthenticAMD
BIOS Vendor ID: Advanced Micro Devices, Inc.
Model name: AMD EPYC 9355 32-Core Processor
BIOS Model name: AMD EPYC 9355 32-Core Processor
BIOS CPU family: 107
CPU family: 26
Model: 2
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
Stepping: 1
Frequency boost: enabled
CPU(s) scaling MHz: 83%
CPU max MHz: 4413.2319
CPU min MHz: 1500.0000
BogoMIPS: 7089.07
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d debug_swap amd_lbr_pmc_freeze
Virtualization: AMD-V
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 64 MiB (64 instances)
L3 cache: 512 MiB (16 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-7, 64-71
NUMA node1 CPU(s): 8-15, 72-79
NUMA node2 CPU(s): 16-23, 80-87

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9355, 3.55 GHz

SPECrate®2026_fp_base = 516

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Platform Notes (Continued)

NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBR SB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From `lscpu --cache`:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 95840 MB
node 0 free: 95147 MB
node 1 cpus: 8-15,72-79
node 1 size: 96763 MB
node 1 free: 95965 MB
node 2 cpus: 16-23,80-87
node 2 size: 96763 MB
node 2 free: 95802 MB
node 3 cpus: 24-31,88-95
node 3 size: 96763 MB
node 3 free: 96084 MB
node 4 cpus: 32-39,96-103
node 4 size: 96763 MB
node 4 free: 95837 MB

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9355, 3.55 GHz

SPECrate®2026_fp_base = 516

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```
node 5 cpus: 40-47,104-111
node 5 size: 96763 MB
node 5 free: 95986 MB
node 6 cpus: 48-55,112-119
node 6 size: 96763 MB
node 6 free: 96111 MB
node 7 cpus: 56-63,120-127
node 7 size: 96280 MB
node 7 free: 95258 MB
node distances:
node   0   1   2   3   4   5   6   7
  0:  10  12  12  12  32  32  32  32
  1:  12  10  12  12  32  32  32  32
  2:  12  12  10  12  32  32  32  32
  3:  12  12  12  10  32  32  32  32
  4:  32  32  32  32  10  12  12  12
  5:  32  32  32  32  12  10  12  12
  6:  32  32  32  32  12  12  10  12
  7:  32  32  32  32  12  12  12  10
```

9. /proc/meminfo

MemTotal: 791248004 kB

10. who -r

run-level 3 Jun 16 21:05

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

```
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
iscsi issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor nsd
postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore virtqemud wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime systemd-remount-fs

disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmiev d iscsi-init iscsid
issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd
nfs nfs-blkmap nfs-server nfsserver rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter svnserve
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9355, 3.55 GHz

SPECrate®2026_fp_base = 516

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Platform Notes (Continued)

systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-nspawn@
systemd-sysextd systemd-time-wait-sync systemd-timesyncd tcstd udisks2 virtinterfaced
virtlockd virtlogd virtnetworkd virtnodedevd virtnwfilterd virtsecret d virtstoraged

vncserver@

indirect

pcscd systemd-userdbd tftp wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.23.22-default

root=UUID=0c0fd396-12b8-460e-af5f-2d1dba73ae32

splash=silent

mitigations=auto

quiet

security=apparmor

crashkernel=384M,high

crashkernel=72M,low

14. cpupower frequency-info

analyzing CPU 28:

current policy: frequency should be within 1.50 GHz and 3.55 GHz.

The governor "performance" may decide which speed to use
within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

kernel.numa_balancing 1

kernel.randomize_va_space 0

vm.compaction_proactiveness 20

vm.dirty_background_bytes 0

vm.dirty_background_ratio 10

vm.dirty_bytes 0

vm.dirty_expire_centisecs 3000

vm.dirty_ratio 8

vm.dirty_writeback_centisecs 500

vm.dirtytime_expire_seconds 43200

vm.extfrag_threshold 500

vm.min_unmapped_ratio 1

vm.nr_hugepages 0

vm.nr_hugepages_mempolicy 0

vm.nr_overcommit_hugepages 0

vm.swappiness 1

vm.watermark_boost_factor 15000

vm.watermark_scale_factor 10

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9355, 3.55 GHz

SPECrate®2026_fp_base = 516

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Platform Notes (Continued)

vm.zone_reclaim_mode

1

16. /sys/kernel/mm/transparent_hugepage

defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information

SPEC is set to: /home/Benchmark/cpu2026-1.0.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	1.4T	128G	1.3T	9%	/home

20. /sys/devices/virtual/dmi/id

Vendor: FUJITSU
Product: PRIMERGY RX2450 M2
Product Family: SERVER
Serial: xxxxxxxxxx

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x SK Hynix HMC88AHBRA478N 32 GB 2 rank 6400
12x Samsung M321R4GA3EB2-CCPKF 32 GB 2 rank 6400

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9355, 3.55 GHz

SPECrate®2026_fp_base = 516

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Platform Notes (Continued)

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: FUJITSU // American Megatrends Inc.

BIOS Version: V5.0.0.35 R2.11.0 for D4129-A1x

BIOS Date: 01/29/2026

BIOS Revision: 2.11

Firmware Revision: 2.47

Compiler Version Notes

C | 782.lbm_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

C++ | 731.astcenc_r(base) 736.ocio_r(base) 748.flightdm_r(base)

| 766.femflow_r(base) 767.nest_r(base) 772.marian_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

C++, C | 709.cactus_r(base) 737.gmsh_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

Fortran | 722.palm_r(base) 749.fotonik3d_r(base) 765.roms_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)

Target: x86_64-unknown-linux-gnu

Thread model: posix

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9355, 3.55 GHz

SPECrate®2026_fp_base = 516

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both C and C++:

clang++ clang

Base Portability Flags

736.ocio_r: -fno-finite-math-only

737.gmsh_r: -fno-fast-math

748.flightdm_r: -fno-reciprocal-math

767.nest_r: -fno-finite-math-only

Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather

-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie

-flto -fstruct-layout=7 -mllvm -unroll-threshold=50

-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining

-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc

-lflang

C++ benchmarks:

-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner

-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M2,
AMD EPYC 9355, 3.55 GHz

SPECrate®2026_fp_base = 516

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Jun-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=2000000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lmdalloc  
-lflang
```

Fortran benchmarks:

```
-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3  
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lmdalloc  
-lflang
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=2000000 -lamdlibm -lmdalloc -lflang
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.html>

<http://www.spec.org/cpu2026/results/flags/Fujitsu-Platform-Settings-V1.0-Turin-RevF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.xml>

<http://www.spec.org/cpu2026/results/flags/Fujitsu-Platform-Settings-V1.0-Turin-RevF.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-06-16 10:49:00-0400.

Report generated on 2026-10-07 10:43:31 by CPU2026 PDF formatter (unknown).

Originally published on 2026-10-06.