SPEC CPU®2026 Floating Point Rate Result

Maginfra Co., Ltd.
QR8218-D3 (AMD EPYC 9365)

SPECrate®2026_fp_base = 575

SPECrate®2026_fp_peak = 586

CPU2026 License:	9087	**Test Date:**	Jul-2026
Test Sponsor:	Maginfra Co., Ltd.	**Hardware Availability:**	Dec-2025
Tested by:	Maginfra Co., Ltd.	**Software Availability:**	Jan-2026

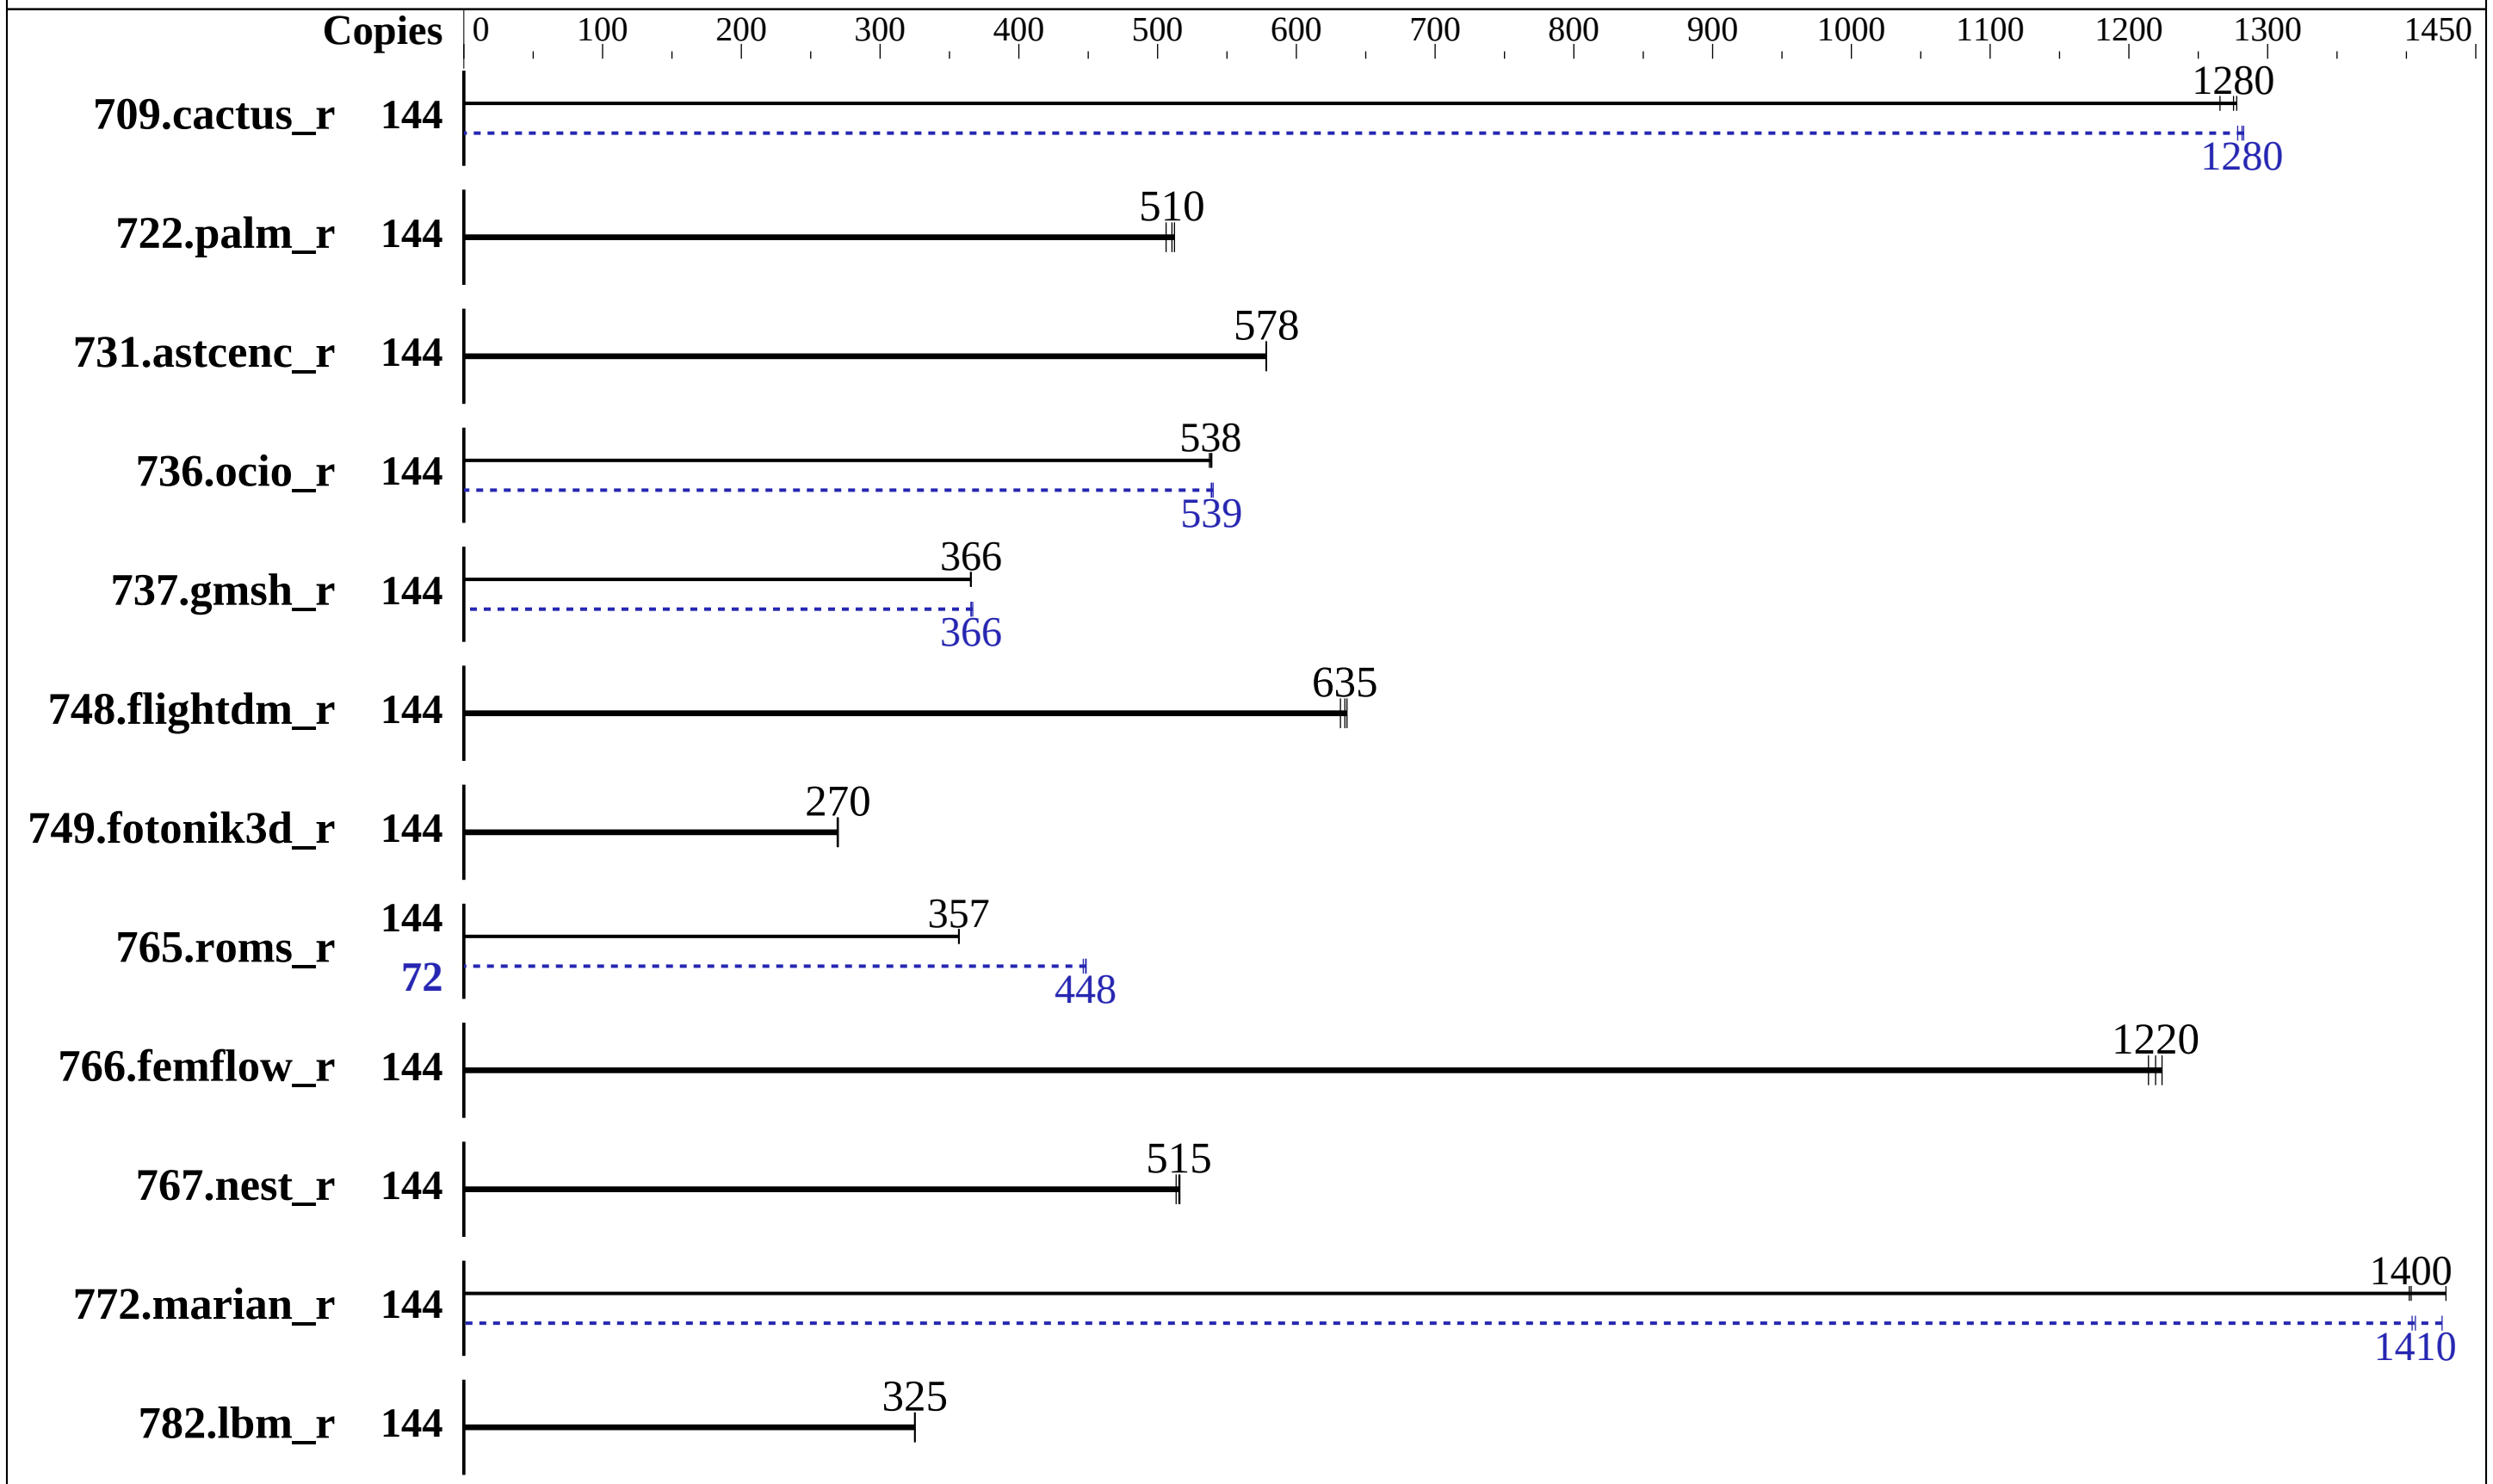

Hardware

CPU Name:	AMD EPYC 9365
Max MHz:	4300
Nominal:	3400
Enabled:	72 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	192 MB I+D on chip per chip, 32 MB shared / 6 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 4 TB NVME SSD
Cooling:	Air
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default
Compiler:	C/C++/Fortran: Version 5.1.0 of AOCC
Compiler Category:	Vendor
Firmware:	Version 01.14.00 released Dec-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2026 Floating Point Rate Result

Maginfra Co., Ltd.
QR8218-D3 (AMD EPYC 9365)

SPECrate®2026_fp_base = 575

SPECrate®2026_fp_peak = 586

CPU2026 License:	9087	**Test Date:**	Jul-2026
Test Sponsor:	Maginfra Co., Ltd.	**Hardware Availability:**	Dec-2025
Tested by:	Maginfra Co., Ltd.	**Software Availability:**	Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	144	**96.9**	**1280**	97.6	1270	96.7	1280	144	**96.4**	**1280**	96.6	1280	96.3	1280
722.palm_r	144	**372**	**510**	376	506	371	512	144	**372**	**510**	376	506	371	512
731.astcenc_r	144	209	578	**209**	**578**	209	578	144	209	578	**209**	**578**	209	578
736.ocio_r	144	**234**	**538**	234	539	234	537	144	234	539	**234**	**539**	233	540
737.gmsh_r	144	181	365	**181**	**366**	181	366	144	**181**	**366**	181	366	180	367
748.flightdm_r	144	**162**	**635**	163	632	162	636	144	**162**	**635**	163	632	162	636
749.fotonik3d_r	144	619	269	**617**	**270**	617	270	144	619	269	**617**	**270**	617	270
765.roms_r	144	635	357	636	357	**636**	**357**	72	254	446	**253**	**448**	253	448
766.femflow_r	144	173	1220	**173**	**1220**	174	1210	144	173	1220	**173**	**1220**	174	1210
767.nest_r	144	221	516	**222**	**515**	222	513	144	221	516	**222**	**515**	222	513
772.marian_r	144	162	1400	159	1430	**162**	**1400**	144	162	1400	159	1430	**162**	**1410**
782.lbm_r	144	**254**	**325**	254	325	254	325	144	**254**	**325**	254	325	254	325
SPECrate®2026_fp_base =		**575**												
SPECrate®2026_fp_peak =		**586**												

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/CPU2026/amd_rate_aocc510_znver5_B_lib/lib:/home/CPU2026/amd_rate_
     aocc510_znver5_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04
```

Platform Notes

```
BIOS configuration:
NUMA nodes per socket = NPS2
Determinism Slider = Power
cTDP Control = Manual
cTDP = 500
Package Power Limit Control = Manual
Package Power Limit  = 500

Sysinfo program /home/CPU2026/bin/sysinfo
Rev: 779ab21020787073335a329f3a45e2cd
running on localhost Mon Aug 24 17:49:23 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
```

(Continued on next page)

Platform Notes (Continued)

```
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

------------------------------------------------------------
2. w
   17:49:23 up  4:52,  1 user,  load average: 73.28, 124.30, 134.90
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                12:58    4:50m  7.74s  6.73s python3 ./run_amd_rate_aocc510_znver5_B1.py

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 6190434
  max locked memory       (kbytes, -l) 2048
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
  cpu time                (seconds, -t) unlimited
  max user processes               (-u) 6190434
  virtual memory           (kbytes, -v) unlimited
  file locks                       (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 python3 ./run_amd_rate_aocc510_znver5_B1.py
 runcpu --config amd_rate_aocc510_znver5_B1.cfg --tune all --reportable --iterations 3 fprate
 runcpu --configfile amd_rate_aocc510_znver5_B1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.063/templogs/preenv.fprate.063.0.log --lognum 063.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9365 36-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb00215a
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
    TLB size        : 192 4K pages
    cpu cores       : 36
    siblings        : 72
    2 physical ids (chips)
    144 processors (hardware threads)
    physical id 0: core ids 0-5,8-13,16-21,24-29,32-37,40-45
    physical id 1: core ids 0-5,8-13,16-21,24-29,32-37,40-45
    physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91
    physical id 1: apicids 128-139,144-155,160-171,176-187,192-203,208-219
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                        x86_64
  CPU op-mode(s):                      32-bit, 64-bit
  Address sizes:                       52 bits physical, 57 bits virtual
  Byte Order:                          Little Endian
```

(Continued on next page)

Platform Notes (Continued)

```
CPU(s):                               144
On-line CPU(s) list:                  0-143
Vendor ID:                            AuthenticAMD
Model name:                           AMD EPYC 9365 36-Core Processor
CPU family:                           26
Model:                                2
Thread(s) per core:                   2
Core(s) per socket:                   36
Socket(s):                            2
Stepping:                             1
Frequency boost:                      enabled
CPU(s) scaling MHz:                   102%
CPU max MHz:                          3400.0000
CPU min MHz:                          1500.0000
BogoMIPS:                             6789.78
Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                      pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                      rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                      extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                      sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                      cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                      osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                      perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                      ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                      smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                      avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                      xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                      cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                      xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
                                      svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                      pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                                      vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                      avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                      movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                      flush_l1d debug_swap hv_inuse_wr_allowed srso_user_kernel_no
                                      amd_lbr_pmc_freeze
Virtualization:                       AMD-V
L1d cache:                            3.4 MiB (72 instances)
L1i cache:                            2.3 MiB (72 instances)
L2 cache:                             72 MiB (72 instances)
L3 cache:                             384 MiB (12 instances)
NUMA node(s):                         4
NUMA node0 CPU(s):                    0-17,72-89
NUMA node1 CPU(s):                    18-35,90-107
NUMA node2 CPU(s):                    36-53,108-125
NUMA node3 CPU(s):                    54-71,126-143
Vulnerability Gather data sampling:   Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Mitigation; IBPB on VMEXIT only
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                        always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     3.4M   12 Data            1    64        1             64
     L1i       32K     2.3M    8 Instruction     1    64        1             64
     L2         1M      72M   16 Unified         2  1024        1             64
     L3        32M     384M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-17,72-89
  node 0 size: 386585 MB
  node 0 free: 385420 MB
  node 1 cpus: 18-35,90-107
  node 1 size: 387062 MB
  node 1 free: 386048 MB
  node 2 cpus: 36-53,108-125
  node 2 size: 387062 MB
  node 2 free: 385950 MB
  node 3 cpus: 54-71,126-143
  node 3 size: 386926 MB
  node 3 free: 385898 MB
  node distances:
  node   0   1   2   3
    0:  10  12  32  32
    1:  12  10  32  32
    2:  32  32  10  12
    3:  32  32  12  10

------------------------------------------------------------
9. /proc/meminfo
```

(Continued on next page)

Platform Notes (Continued)

```
   MemTotal:       1584778992 kB

 ------------------------------------------------------------
 10. who -r
   run-level 3 Aug 24 12:57

 ------------------------------------------------------------
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
   Default Target  Status
   multi-user      running

 ------------------------------------------------------------
 12. Services, from systemctl list-unit-files
   STATE            UNIT FILES
   enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                    issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                    nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd systemd-pstore
   enabled-runtime  systemd-remount-fs
   disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                    chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                    firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                    kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                    serial-getty@ smartd_generate_opts snmpd snmptrapd sshd systemd-boot-check-no-failures
                    systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                    systemd-timesyncd tuned udisks2 vncserver@ wicked wickedd-auto4 wickedd-dhcp4
                    wickedd-dhcp6 wickedd-nanny
   indirect         systemd-userdbd wickedd

 ------------------------------------------------------------
 13. Linux kernel boot-time arguments, from /proc/cmdline
   BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
   root=UUID=b599d87c-474e-4c72-b781-36d0bcedf18d
   splash=silent
   mitigations=auto
   quiet
   security=apparmor

 ------------------------------------------------------------
 14. cpupower frequency-info
   analyzing CPU 45:
     current policy: frequency should be within 1.50 GHz and 3.40 GHz.
                     The governor "performance" may decide which speed to use
                     within this range.
     boost state support:
       Supported: yes
       Active: yes
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
15. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing                1
  kernel.randomize_va_space            0
  vm.compaction_proactiveness         20
  vm.dirty_background_bytes            0
  vm.dirty_background_ratio           10
  vm.dirty_bytes                       0
  vm.dirty_expire_centisecs         3000
  vm.dirty_ratio                       8
  vm.dirty_writeback_centisecs       500
  vm.dirtytime_expire_seconds      43200
  vm.extfrag_threshold               500
  vm.min_unmapped_ratio                1
  vm.nr_hugepages                      0
  vm.nr_hugepages_mempolicy            0
  vm.nr_overcommit_hugepages           0
  vm.swappiness                        1
  vm.watermark_boost_factor        15000
  vm.watermark_scale_factor           10
  vm.zone_reclaim_mode                 1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
```

(Continued on next page)

Platform Notes (Continued)

```
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/CPU2026
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 xfs   929G   75G  855G   8% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Maginfra
    Product:        QR8218-D3
    Product Family: Not specified
    Serial:         00000000

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    12x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
    11x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400
    1x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      01.14.00
   BIOS Date:         12/25/2025
```

Compiler Version Notes

```
==============================================================================
C       | 782.lbm_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C++      | 731.astcenc_r(base, peak) 736.ocio_r(base, peak)
         | 748.flightdm_r(base, peak) 766.femflow_r(base, peak)
         | 767.nest_r(base, peak) 772.marian_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C   | 709.cactus_r(base, peak) 737.gmsh_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 722.palm_r(base, peak) 749.fotonik3d_r(base, peak) 765.roms_r(base,
        | peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both C and C++:
`clang++ clang`

Base Portability Flags

736.ocio_r: -fno-finite-math-only
737.gmsh_r: -fno-fast-math
748.flightdm_r: -fno-reciprocal-math
767.nest_r: -fno-finite-math-only

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

C++ benchmarks:
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

Fortran benchmarks:
-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both C and C++:
clang++ clang

Peak Portability Flags

736.ocio_r: -fno-finite-math-only
737.gmsh_r: -fno-fast-math
748.flightdm_r: -fno-reciprocal-math
767.nest_r: -fno-finite-math-only

Peak Optimization Flags

C benchmarks:

782.lbm_r: basepeak = yes

C++ benchmarks:

731.astcenc_r: basepeak = yes

736.ocio_r: -m64 -std=c++17
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -ffast-math -O3

(Continued on next page)

Peak Optimization Flags (Continued)

736.ocio_r (continued):
`-march=znver5 -fveclib=AMDLIBM -flto`
`-mllvm -unroll-threshold=100`
`-mllvm -loop-unswitch-threshold=200000`
`-mllvm -reduce-array-computations=3 -zopt -lamdlibm`
`-lamdalloc -lflang`

748.flightdm_r: `basepeak = yes`

766.femflow_r: `basepeak = yes`

767.nest_r: `basepeak = yes`

772.marian_r: `Same as 736.ocio_r`

Fortran benchmarks:

722.palm_r: `basepeak = yes`

749.fotonik3d_r: `basepeak = yes`

765.roms_r: `-m64 -Mstandard`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math`
`-Ofast -march=znver5 -fveclib=AMDLIBM -flto -Mrecursive`
`-mllvm -reduce-array-computations=3`
`-fepilog-vectorization-of-inductions -zopt -lamdlibm`
`-lamdalloc -lflang`

Benchmarks using both C and C++:
`-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`
`-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner`
`-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie`
`-flto -fstruct-layout=7 -mllvm -unroll-threshold=50`
`-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining`
`-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100`
`-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.html
http://www.spec.org/cpu2026/results/flags/Maginfra-Platform-Settings-amd-V1.1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.xml
http://www.spec.org/cpu2026/results/flags/Maginfra-Platform-Settings-amd-V1.1.xml

Tested with SPEC CPU®2026 v1.0.1 on 2026-08-24 17:49:23-0400.
Report generated on 2026-10-07 10:44:12 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-10-06.