# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Esconet Technologies Ltd.


Hexadata HD-RS4000 Ver:TUR-02/10G
(AMD EPYC 9554 64-Core Processor)

SPECspeed®2026_fp_base = 10.8

SPECspeed®2026_fp_peak = 11.2

**CPU2026 License:** 7385
**Test Sponsor:** Esconet Technologies Ltd.
**Tested by:** Esconet Technologies Ltd.

**Test Date:** Sep-2026
**Hardware Availability:** Feb-2026
**Software Availability:** May-2026

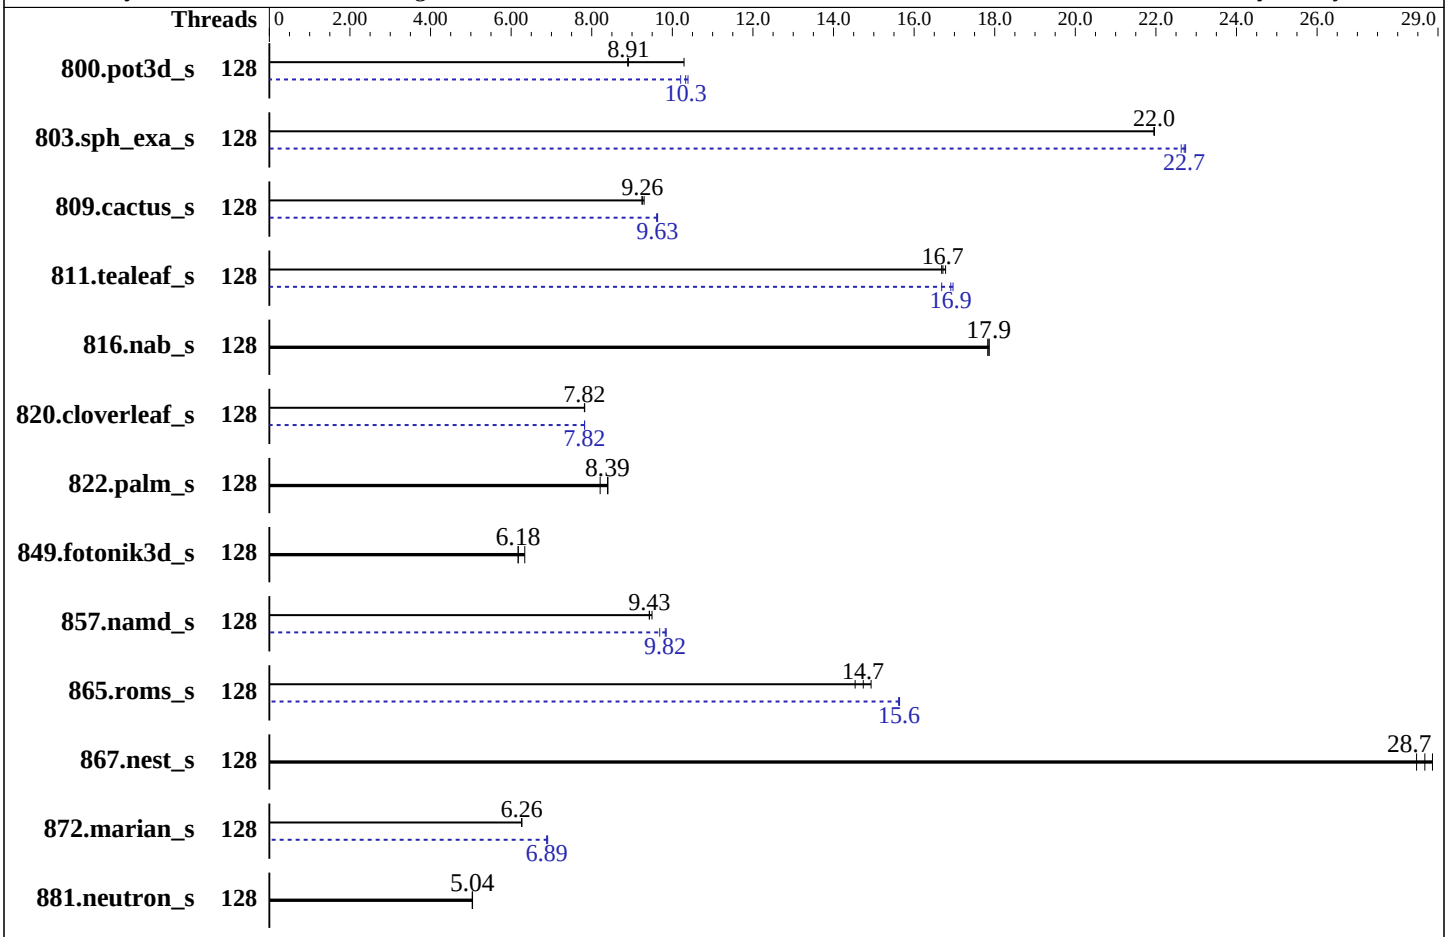


### Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 9554 |
| Max MHz: | 3750 |
| Nominal: | 3100 |
| Enabled: | 128 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 256 MB I+D on chip per chip, 32 MB shared / 8 cores |
| Other: | None |
| Memory: | 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4800) |
| Storage: | 1 x 500 GB M.2 SSD |
| Cooling: | Air |
| Other: | None |

### Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default |
| Compiler: | C/C++: Version 5.2.0 of AOCC Fortran: Flang v22 |
| Compiler Category: | Vendor |
| Firmware: | Version 11.04.HD01 released Feb-2026 |
| File System: | btrfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | None |
| Power Management: | OS set to prefer performance at the cost of additional power usage. |

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 800.pot3d_s | 128 | 75.7 | 8.89 | 65.4 | 10.3 | **75.5** | **8.91** | 128 | 64.8 | 10.4 | 65.9 | 10.2 | **65.1** | **10.3** |
| 803.sph_exa_s | 128 | 56.4 | 22.0 | **56.4** | **22.0** | 56.4 | 22.0 | 128 | 54.7 | 22.6 | 54.4 | 22.7 | **54.5** | **22.7** |
| 809.cactus_s | 128 | 121 | 9.30 | 121 | 9.25 | **121** | **9.26** | 128 | 117 | 9.61 | **116** | **9.63** | 116 | 9.63 |
| 811.tealeaf_s | 128 | 33.4 | 16.7 | **33.3** | **16.7** | 33.2 | 16.8 | 128 | 32.8 | 17.0 | **32.9** | **16.9** | 33.4 | 16.7 |
| 816.nab_s | 128 | **63.1** | **17.9** | 63.0 | 17.9 | 63.2 | 17.8 | 128 | **63.1** | **17.9** | 63.0 | 17.9 | 63.2 | 17.8 |
| 820.cloverleaf_s | 128 | **110** | **7.82** | 110 | 7.83 | 110 | 7.82 | 128 | 110 | 7.82 | 110 | 7.82 | **110** | **7.82** |
| 822.palm_s | 128 | 150 | 8.21 | 146 | 8.40 | **146** | **8.39** | 128 | 150 | 8.21 | 146 | 8.40 | **146** | **8.39** |
| 849.fotonik3d_s | 128 | 104 | 6.34 | **107** | **6.18** | 107 | 6.17 | 128 | 104 | 6.34 | **107** | **6.18** | 107 | 6.17 |
| 857.namd_s | 128 | **154** | **9.43** | 153 | 9.50 | 154 | 9.43 | 128 | **148** | **9.82** | 147 | 9.85 | 150 | 9.69 |
| 865.roms_s | 128 | **74.0** | **14.7** | 75.0 | 14.5 | 73.0 | 14.9 | 128 | 69.7 | 15.6 | 69.8 | 15.6 | **69.7** | **15.6** |
| 867.nest_s | 128 | **75.3** | **28.7** | 74.8 | 28.9 | 75.9 | 28.5 | 128 | **75.3** | **28.7** | 74.8 | 28.9 | 75.9 | 28.5 |
| 872.marian_s | 128 | **173** | **6.26** | 173 | 6.26 | 173 | 6.26 | 128 | **157** | **6.89** | 157 | 6.88 | 157 | 6.91 |
| 881.neutron_s | 128 | 162 | 5.04 | 162 | 5.04 | **162** | **5.04** | 128 | 162 | 5.04 | 162 | 5.04 | **162** | **5.04** |

**SPECspeed®2026_fp_base = 10.8**

**SPECspeed®2026_fp_peak = 11.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
Flang v22 is available at
https://flang.llvm.org/
```

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
    numactl --physcpubind=0-15 runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
```

**(Continued on next page)**

## Operating System Notes (Continued)

```
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

To disable Transparent Hugepages (THP) for 816.nab_s,865.roms_s=peak:
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo never > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH =
     "/root/cpu2026/amd_speed_aocc520_znver5_A_lib/lib:/root/cpu2026/amd_spee
     d_aocc520_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
OMP_THREAD_LIMIT = "256"
```

## General Notes

```
Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB Memory using Ubuntu 24.04
```

## Platform Notes

```
 BIOS settings:
              Default

 Sysinfo program /root/cpu2026/bin/sysinfo
 Rev: 779ab21020787073335a329f3a45e2cd
 running on localhost Fri Sep 18 18:39:43 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09) x86_64

------------------------------------------------------------
2. w
   18:39:43 up  5:52,  1 user,  load average: 57.53, 56.70, 39.86
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                02Jul26  5:32m 13.57s 12.04s python3.11
  run_amd_speed_aocc520_znver5_A1.py

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4124621
  max locked memory       (kbytes, -l) 2048
  max memory size         (kbytes, -m) unlimited
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4124621
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=31
 login -- root
 -bash
 python3.11 run_amd_speed_aocc520_znver5_A1.py
 runcpu --config amd_speed_aocc520_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
 runcpu --configfile amd_speed_aocc520_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9554 64-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 17
    stepping        : 1
    microcode       : 0xa101148
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
    TLB size        : 3584 4K pages
    cpu cores       : 64
    siblings        : 128
    2 physical ids (chips)
    256 processors (hardware threads)
    physical id 0: core ids 0-63
    physical id 1: core ids 0-63
    physical id 0: apicids 0-127
    physical id 1: apicids 128-255
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu
```

**(Continued on next page)**

## Platform Notes (Continued)

```
From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               256
  On-line CPU(s) list:                  0-255
  Vendor ID:                            AuthenticAMD
  BIOS Vendor ID:                       Advanced Micro Devices, Inc.
  Model name:                           AMD EPYC 9554 64-Core Processor
  BIOS Model name:                      AMD EPYC 9554 64-Core Processor                Unknown CPU @ 3.1GHz
  BIOS CPU family:                      107
  CPU family:                           25
  Model:                                17
  Thread(s) per core:                   2
  Core(s) per socket:                   64
  Socket(s):                            2
  Stepping:                             1
  Frequency boost:                      enabled
  CPU(s) scaling MHz:                   83%
  CPU max MHz:                          3762.9880
  CPU min MHz:                          1500.0000
  BogoMIPS:                             6200.27
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                        rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                        extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                        sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                        cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                        osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                        perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                        ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                                        erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                        clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                        user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                                        amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
                                        flushbyasid decodeassists pausefilter pfthreshold avic
                                        v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                                        ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
                                        debug_swap
  Virtualization:                       AMD-V
  L1d cache:                            4 MiB (128 instances)
  L1i cache:                            4 MiB (128 instances)
  L2 cache:                             128 MiB (128 instances)
  L3 cache:                             512 MiB (16 instances)
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   NUMA node(s):                         2
   NUMA node0 CPU(s):                    0-63,128-191
   NUMA node1 CPU(s):                    64-127,192-255
   Vulnerability Gather data sampling:   Not affected
   Vulnerability Itlb multihit:          Not affected
   Vulnerability L1tf:                   Not affected
   Vulnerability Mds:                    Not affected
   Vulnerability Meltdown:               Not affected
   Vulnerability Mmio stale data:        Not affected
   Vulnerability Reg file data sampling: Not affected
   Vulnerability Retbleed:               Not affected
   Vulnerability Spec rstack overflow:   Mitigation; Safe RET
   Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                         always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
   Vulnerability Srbds:                  Not affected
   Vulnerability Tsx async abort:        Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       32K       4M    8 Data            1    64        1             64
      L1i       32K       4M    8 Instruction     1    64        1             64
      L2         1M     128M    8 Unified         2  2048        1             64
      L3        32M     512M   16 Unified         3 32768        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 2 nodes (0-1)
   node 0 cpus: 0-63,128-191
   node 0 size: 515659 MB
   node 0 free: 513396 MB
   node 1 cpus: 64-127,192-255
   node 1 size: 515521 MB
   node 1 free: 513948 MB
   node distances:
   node   0   1
     0:  10  32
     1:  32  10

 ------------------------------------------------------------
 9. /proc/meminfo
    MemTotal:       1055929120 kB

 ------------------------------------------------------------
 10. who -r
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  run-level 3 Jul 2 22:37

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump
                   kdump-early kdump-notify nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels
                   rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                   wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebtables fsidd
                   grub2-once haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap
                   rpcbind rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-confext
                   systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=a9f42cc9-bff7-45f3-9acc-353a5217934b
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=383M,high
  crashkernel=72M,low

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 237:
    current policy: frequency should be within 1.50 GHz and 3.10 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: throughput-performance
```

**(Continued on next page)**

## Platform Notes (Continued)

```
------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
20. Disk information
SPEC is set to: /root/cpu2026
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   Filesystem     Type   Size  Used Avail Use% Mounted on
   /dev/nvme0n1p2 btrfs  464G   25G  436G   6% /root

 ------------------------------------------------------------
 21. /sys/devices/virtual/dmi/id
     Vendor:          HexaData
     Product:         HD-RS4000
     Serial:          HDS20260998

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      16x Samsung M321R8GA0PB0-CWMCJ 64 GB 2 rank 5600, configured at 4800


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       HexaData
    BIOS Version:      11.04.HD01
    BIOS Date:         02/09/2026
    BIOS Revision:     5.27
```

## Compiler Version Notes

```
==============================================================================
C       | 811.tealeaf_s(base, peak) 816.nab_s(base, peak) 881.neutron_s(base,
        | peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.2.0-Build#2035 2026_04_10)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.2.0-4925-2035/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 803.sph_exa_s(base, peak) 857.namd_s(base, peak) 867.nest_s(base,
        | peak) 872.marian_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.2.0-Build#2035 2026_04_10)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.2.0-4925-2035/bin
------------------------------------------------------------------------------

==============================================================================
C++, C  | 809.cactus_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.2.0-Build#2035 2026_04_10)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.2.0-4925-2035/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 800.pot3d_s(base, peak) 820.cloverleaf_s(base, peak)
        | 822.palm_s(base, peak) 849.fotonik3d_s(base, peak) 865.roms_s(base,
        | peak)
------------------------------------------------------------------------------
flang version 22.1.0-rc2 (https://github.com/llvm/llvm-project
  a47b42eb9f9b302167b4fc413e6c92798d65dd0b)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/llvm/llvm-22.1.0-rc2/install/bin
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang-22

Benchmarks using both C and C++:
clang++ clang

## Base Portability Flags

800.pot3d_s: -DSPEC_LP64
803.sph_exa_s: -DSPEC_LP64
809.cactus_s: -DSPEC_LP64

**(Continued on next page)**

## Base Portability Flags (Continued)

811.tealeaf_s: -DSPEC_LP64
816.nab_s: -DSPEC_LP64
820.cloverleaf_s: -DSPEC_LP64
822.palm_s: -DSPEC_LP64
849.fotonik3d_s: -DSPEC_LP64
857.namd_s: -DSPEC_LP64
865.roms_s: -DSPEC_LP64
867.nest_s: -fno-finite-math-only -DSPEC_LP64
872.marian_s: -DSPEC_LP64
881.neutron_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt
-mrecip=none -fopenmp -DSPEC_OPENMP -lamdalloc -lamdlibm
-fopenmp=libomp -lomp

C++ benchmarks:
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fopenmp -DSPEC_OPENMP
-pthread -lamdalloc -lamdlibm -fopenmp=libomp -lomp

Fortran benchmarks:
-m64 -std=f2018 -O3 -flto -march=znver5 -fveclib=AMDLIBM
-ffast-math -funroll-loops -DSPEC_OPENMP -fopenmp
-fdo-concurrent-to-openmp=host -lamdalloc -lamdlibm -fopenmp=libomp
-lomp

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mrecip=none -fopenmp -DSPEC_OPENMP -pthread -lamdalloc -lamdlibm

**(Continued on next page)**

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-fopenmp=libomp -lomp

## Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-return-type -Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang-22

Benchmarks using both C and C++:
clang++ clang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

811.tealeaf_s: -m64 -std=c18
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto
-march=znver5 -fveclib=AMDLIBM -ffast-math

**(Continued on next page)**

# Peak Optimization Flags (Continued)

811.tealeaf_s (continued):
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -fopenmp -DSPEC_OPENMP
-lamdalloc -lamdlibm -fopenmp=libomp -lomp

816.nab_s: basepeak = yes

881.neutron_s: basepeak = yes

C++ benchmarks:

803.sph_exa_s: -m64 -std=c++17
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -fopenmp -DSPEC_OPENMP
-pthread -lamdalloc -lamdlibm -fopenmp=libomp -lomp

857.namd_s: Same as 803.sph_exa_s

867.nest_s: basepeak = yes

872.marian_s: Same as 803.sph_exa_s

Fortran benchmarks:

800.pot3d_s: -m64 -std=f2018 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -funroll-loops
-DSPEC_OPENMP -fopenmp -fdo-concurrent-to-openmp=host
-lamdalloc -lamdlibm -fopenmp=libomp -lomp

820.cloverleaf_s: Same as 800.pot3d_s

822.palm_s: basepeak = yes

849.fotonik3d_s: basepeak = yes

865.roms_s: Same as 800.pot3d_s

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

**(Continued on next page)**

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-mllvm -unroll-threshold=100 -fopenmp -DSPEC_OPENMP -pthread
-lamdalloc -lamdlibm -fopenmp=libomp -lomp

## Peak Other Flags

C benchmarks (except as noted below):
-Wno-return-type -Wno-unused-command-line-argument

811.tealeaf_s: -Wno-return-type

Benchmarks using both C and C++:
-Wno-return-type

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/aocc520-flags.html
http://www.spec.org/cpu2026/results/flags/HexaData-Platform-Settings-V1.2-Genoa-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/aocc520-flags.xml
http://www.spec.org/cpu2026/results/flags/HexaData-Platform-Settings-V1.2-Genoa-revA.xml


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-09-18 09:09:42-0400.
Report generated on 2026-10-27 12:33:52 by CPU2026 PDF formatter (unknown).
Originally published on 2026-10-27.