



# SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Altix ICE 8200EX  
(Intel Xeon X5570, 2.93 GHz, PMPI 5.6.6)

**SPECmpIM\_peak2007 = Not Run**

**SPECmpIM\_base2007 = 24.5**

**MPI2007 license:** 021


**Test date:** Mar-2009

**Test sponsor:** Platform Computing Inc.

**Hardware Availability:** Mar-2009

**Tested by:** Platform Computing Inc.

**Software Availability:** Feb-2009

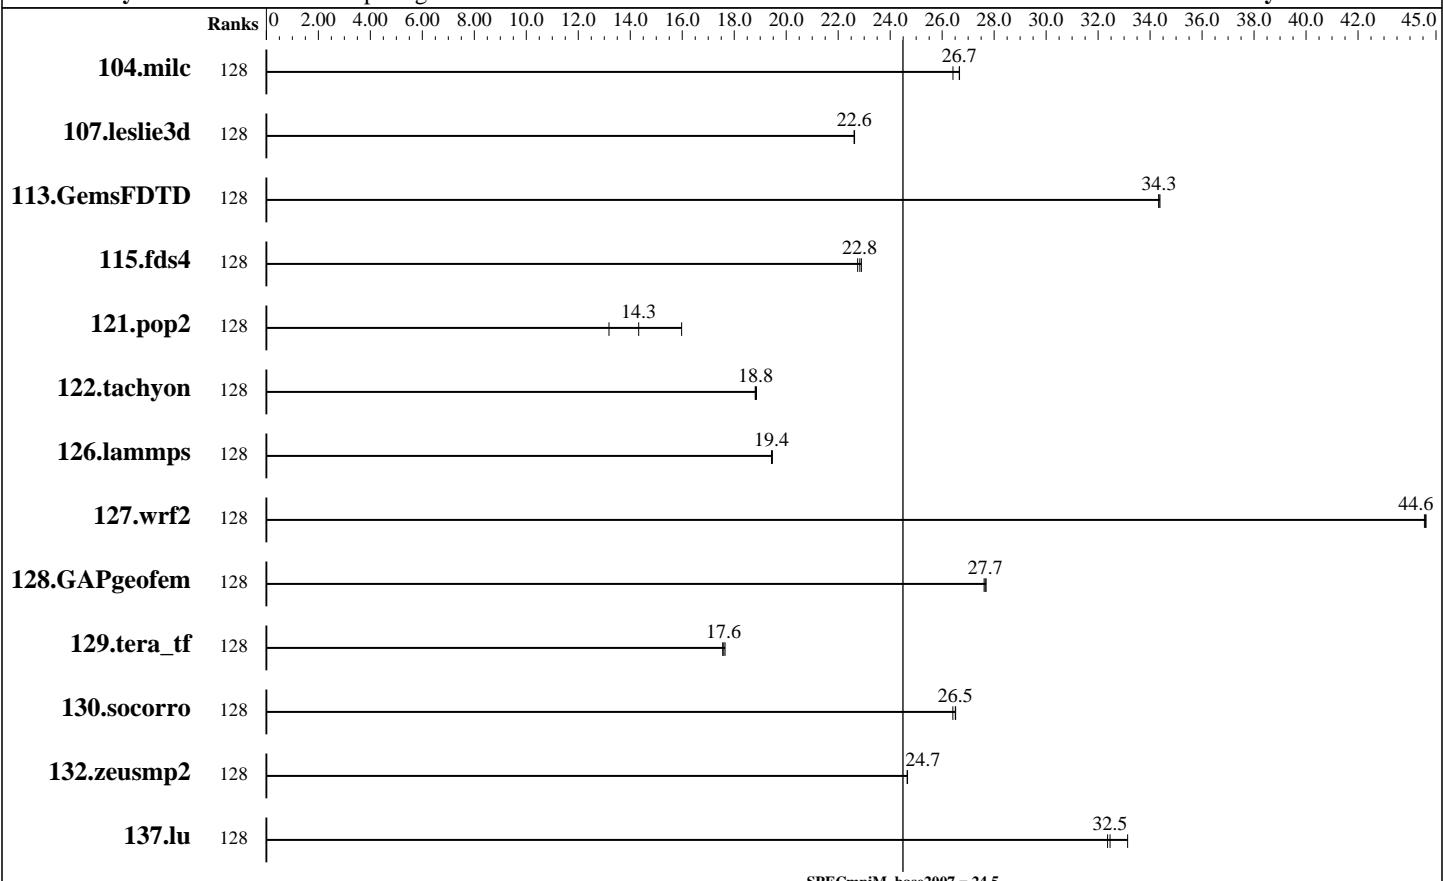

## Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
104.milc	128	59.2	26.4	<b><u>58.7</u></b>	<b><u>26.7</u></b>	58.7	26.7									
107.leslie3d	128	<b><u>231</u></b>	<b><u>22.6</u></b>	231	22.6	231	22.6									
113.GemsFDTD	128	184	34.3	<b><u>184</u></b>	<b><u>34.3</u></b>	183	34.4									
115.fds4	128	85.8	22.7	<b><u>85.5</u></b>	<b><u>22.8</u></b>	85.2	22.9									
121.pop2	128	313	13.2	258	16.0	<b><u>288</u></b>	<b><u>14.3</u></b>									
122.tachyon	128	<b><u>149</u></b>	<b><u>18.8</u></b>	149	18.8	148	18.9									
126.lammps	128	<b><u>150</u></b>	<b><u>19.4</u></b>	150	19.4	150	19.5									
127.wrf2	128	175	44.6	175	44.6	<b><u>175</u></b>	<b><u>44.6</u></b>									
128.GAPgeomfem	128	74.6	27.7	74.8	27.6	<b><u>74.7</u></b>	<b><u>27.7</u></b>									
129.tera_tf	128	<b><u>157</u></b>	<b><u>17.6</u></b>	158	17.6	157	17.6									

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Altix ICE 8200EX  
(Intel Xeon X5570, 2.93 GHz, PMPI 5.6.6)

**SPECmpIM\_peak2007 = Not Run**

**SPECmpIM\_base2007 = 24.5**

**MPI2007 license:** 021

**Test date:** Mar-2009

**Test sponsor:** Platform Computing Inc.

**Hardware Availability:** Mar-2009

**Tested by:** Platform Computing Inc.

**Software Availability:** Feb-2009

## Results Table (Continued)

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	128	145	26.4	<u>144</u>	<u>26.5</u>	144	26.5									
132.zeusmp2	128	<u>126</u>	<u>24.7</u>	126	24.7	126	24.7									
137.lu	128	111	33.1	<u>113</u>	<u>32.5</u>	114	32.4									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Hardware Summary

Type of System: Homogeneous  
Compute Node: SGI Altix ICE 8200EX Compute Node  
Interconnects: InfiniBand (MPI)  
InfiniBand (I/O)  
File Server Node: SGI InfiniteStorage Nexas 2000 NAS  
Total Compute Nodes: 16  
Total Chips: 32  
Total Cores: 128  
Total Threads: 256  
Total Memory: 768 GB  
Base Ranks Run: 128  
Minimum Peak Ranks: --  
Maximum Peak Ranks: --

### Software Summary

C Compiler: Intel C Compiler for Linux  
Version 10.1, Build 20080801  
C++ Compiler: Intel C++ Compiler for Linux  
Version 10.1, Build 20080801  
Fortran Compiler: Intel Fortran Compiler for Linux  
Version 10.1, Build 20080801  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
MPI Library: Platform MPI 5.6.6-59413  
Other MPI Info: OFED 1.3.1  
OFED 1.3.1  
Platform Computing Inc has acquired  
Scali MPI Connect, hence Platform MPI  
and Scali MPI Connect are used synonymously.  
None  
None  
Pre-processors:  
Other Software:

## Node Description: SGI Altix ICE 8200EX Compute Node

### Hardware

Number of nodes: 16  
Uses of the node: compute  
Vendor: SGI  
Model: SGI Altix ICE 8200EX (Intel Xeon X5570, 2.93 GHz)  
CPU Name: Intel Xeon X5570  
CPU(s) orderable: 1-2 chips  
Chips enabled: 2  
Cores enabled: 8  
Cores per chip: 4  
Threads per core: 2  
CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz,  
6.4 GT/s QPI, Hyper-Threading enabled  
CPU MHZ: 2934  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12\*4GB DDR3-1066 CL7 RDIMMs)  
Disk Subsystem: None  
Other Hardware: None  
Adapter: Mellanox MT26418 ConnectX IB DDR  
(PCIe x8 Gen2 5 GT/s)

### Software

Adapter: Mellanox MT26418 ConnectX IB DDR  
(PCIe x8 Gen2 5 GT/s)  
Adapter Driver: OFED-1.3.1  
Adapter Firmware: 2.5.0  
Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2  
Kernel 2.6.16.60-0.30-smp  
Local File System: NFSv3  
Shared File System: NFSv3 IPoIB  
System State: Multi-user, run level 3  
Other Software: SGI ProPack 6 for Linux Service Pack 2

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Altix ICE 8200EX  
(Intel Xeon X5570, 2.93 GHz, PMPI 5.6.6)

**SPECmpIM\_peak2007 = Not Run**

**SPECmpIM\_base2007 = 24.5**

**MPI2007 license:** 021

**Test date:** Mar-2009

**Test sponsor:** Platform Computing Inc.

**Hardware Availability:** Mar-2009

**Tested by:** Platform Computing Inc.

**Software Availability:** Feb-2009

## Node Description: SGI Altix ICE 8200EX Compute Node

Number of Adapters:	1
Slot Type:	PCIe x8 Gen2
Data Rate:	InfiniBand 4x DDR
Ports Used:	2
Interconnect Type:	InfiniBand

## Node Description: SGI InfiniteStorage NEXIS 2000 NAS

Hardware		Software	
Number of nodes:	1	Adapter:	Mellanox MT25208 InfiniHost III Ex (PCIe x8 Gen1 2.5 GT/s)
Uses of the node:	fileserver	Adapter Driver:	OFED-1.3
Vendor:	SGI	Adapter Firmware:	5.3.0
Model:	SGI Altix XE 240 (Intel Xeon 5140, 2.33 GHz)	Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1 Kernel 2.6.16.54-0.2.5-smp
CPU Name:	Intel Xeon 5140	Local File System:	xfs
CPU(s) orderable:	1-2 chips	Shared File System:	--
Chips enabled:	2	System State:	Multi-user, run level 3
Cores enabled:	4	Other Software:	SGI ProPack 5 for Linux Service Pack 5
Cores per chip:	2		
Threads per core:	1		
CPU Characteristics:	1333 MHz FSB		
CPU MHz:	2328		
Primary Cache:	32 KB I + 32 KB D on chip per core		
Secondary Cache:	4 MB I+D on chip per chip		
L3 Cache:	None		
Other Cache:	None		
Memory:	24 GB (6*4GB DDR2-400 DIMMS)		
Disk Subsystem:	7 TB RAID 5 48 x 147 GB SAS (Seagate Cheetah 15000 rpm)		
Other Hardware:	None		
Adapter:	Mellanox MT25208 InfiniHost III Ex (PCIe x8 Gen1 2.5 GT/s)		
Number of Adapters:	2		
Slot Type:	PCIe x8 Gen1		
Data Rate:	InfiniBand 4x DDR		
Ports Used:	2		
Interconnect Type:	InfiniBand		

## Interconnect Description: InfiniBand (MPI)

Hardware		Software	
Vendor:	Mellanox Technologies		
Model:	MT26418 ConnectX		
Switch Model:	Mellanox MT47396 InfiniScale III		
Number of Switches:	8		
Number of Ports:	24		
Data Rate:	InfiniBand 4x DDR		

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Altix ICE 8200EX  
(Intel Xeon X5570, 2.93 GHz, PMPI 5.6.6)

**SPECmpiM\_peak2007 = Not Run**

**SPECmpiM\_base2007 = 24.5**

**MPI2007 license:** 021

**Test date:** Mar-2009

**Test sponsor:** Platform Computing Inc.

**Hardware Availability:** Mar-2009

**Tested by:** Platform Computing Inc.

**Software Availability:** Feb-2009

## Interconnect Description: InfiniBand (MPI)

Firmware:	2020001
Topology:	Bristle hypercube with express links
Primary Use:	MPI traffic

## Interconnect Description: InfiniBand (I/O)

<b>Hardware</b>		<b>Software</b>
Vendor:	Mellanox Technologies	
Model:	MT26418 ConnectX	
Switch Model:	Mellanox MT47396 InfiniScale-III	
Number of Switches:	8	
Number of Ports:	24	
Data Rate:	InfiniBand 4x DDR	
Firmware:	2020001	
Topology:	Bristle hypercube with express links	
Primary Use:	I/O traffic	

## Submit Notes

The config file option 'submit' was used.

## General Notes

Software environment:  
 limit stacksize unlimited  
 Removes limits on the maximum size of the automatically-extended stack region of the current process and each process it creates.  
 PBS Pro batch scheduler ([www.altair.com](http://www.altair.com)) is used with placement sets to ensure each MPI job is assigned to a topologically compact set of nodes  
 BIOS settings:  
 AMI BIOS version 8.15  
 Hyper-Threading Technology enabled (default)  
 Intel Turbo Boost Technology enabled (default)  
 Intel Turbo Boost Technology activated in the OS via  
 /etc/init.d/acpid start  
 /etc/init.d/powersaved start  
 powersave -f

## Base Compiler Invocation

C benchmarks:  
 mpicc -ccl icc

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Altix ICE 8200EX  
(Intel Xeon X5570, 2.93 GHz, PMPI 5.6.6)

**SPECmpIM\_peak2007 = Not Run**

**SPECmpIM\_base2007 = 24.5**

**MPI2007 license:** 021

**Test date:** Mar-2009

**Test sponsor:** Platform Computing Inc.

**Hardware Availability:** Mar-2009

**Tested by:** Platform Computing Inc.

**Software Availability:** Feb-2009

## Base Compiler Invocation (Continued)

C++ benchmarks:

```
126.lammps: mpicc -ccl icpc
```

Fortran benchmarks:

```
mpif77 -ccl ifort
```

Benchmarks using both Fortran and C:

```
mpicc -ccl icc mpif77 -ccl ifort
```

## Base Portability Flags

```
121.pop2: -DSPEC_MPI_CASE_FLAG
```

```
127.wrf2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-O3 -ipo -xT -no-prec-div
```

C++ benchmarks:

```
126.lammps: -O3 -ipo -xT -no-prec-div -ansi-alias
```

Fortran benchmarks:

```
-O3 -ipo -xT -no-prec-div
```

Benchmarks using both Fortran and C:

```
-O3 -ipo -xT -no-prec-div
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/MPI2007\\_flags.20081204.html](http://www.spec.org/mpi2007/flags/MPI2007_flags.20081204.html)

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel101\\_flags.20080618.html](http://www.spec.org/mpi2007/flags/EM64T_Intel101_flags.20080618.html)

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/mpi2007/flags/MPI2007\\_flags.20081204.xml](http://www.spec.org/mpi2007/flags/MPI2007_flags.20081204.xml)

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel101\\_flags.20080618.xml](http://www.spec.org/mpi2007/flags/EM64T_Intel101_flags.20080618.xml)



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Altix ICE 8200EX  
(Intel Xeon X5570, 2.93 GHz, PMPI 5.6.6)

**SPECmpiM\_peak2007 = Not Run**

**SPECmpiM\_base2007 = 24.5**

**MPI2007 license:** 021

**Test date:** Mar-2009

**Test sponsor:** Platform Computing Inc.

**Hardware Availability:** Mar-2009

**Tested by:** Platform Computing Inc.

**Software Availability:** Feb-2009

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v1.1.

Report generated on Tue Jul 22 13:37:17 2014 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 14 April 2009.