



SPEC® MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpiL_peak2007 = 39.0

SPECmpiL_base2007 = 28.9

MPI2007 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Mar-2011

Software Availability: Aug-2011

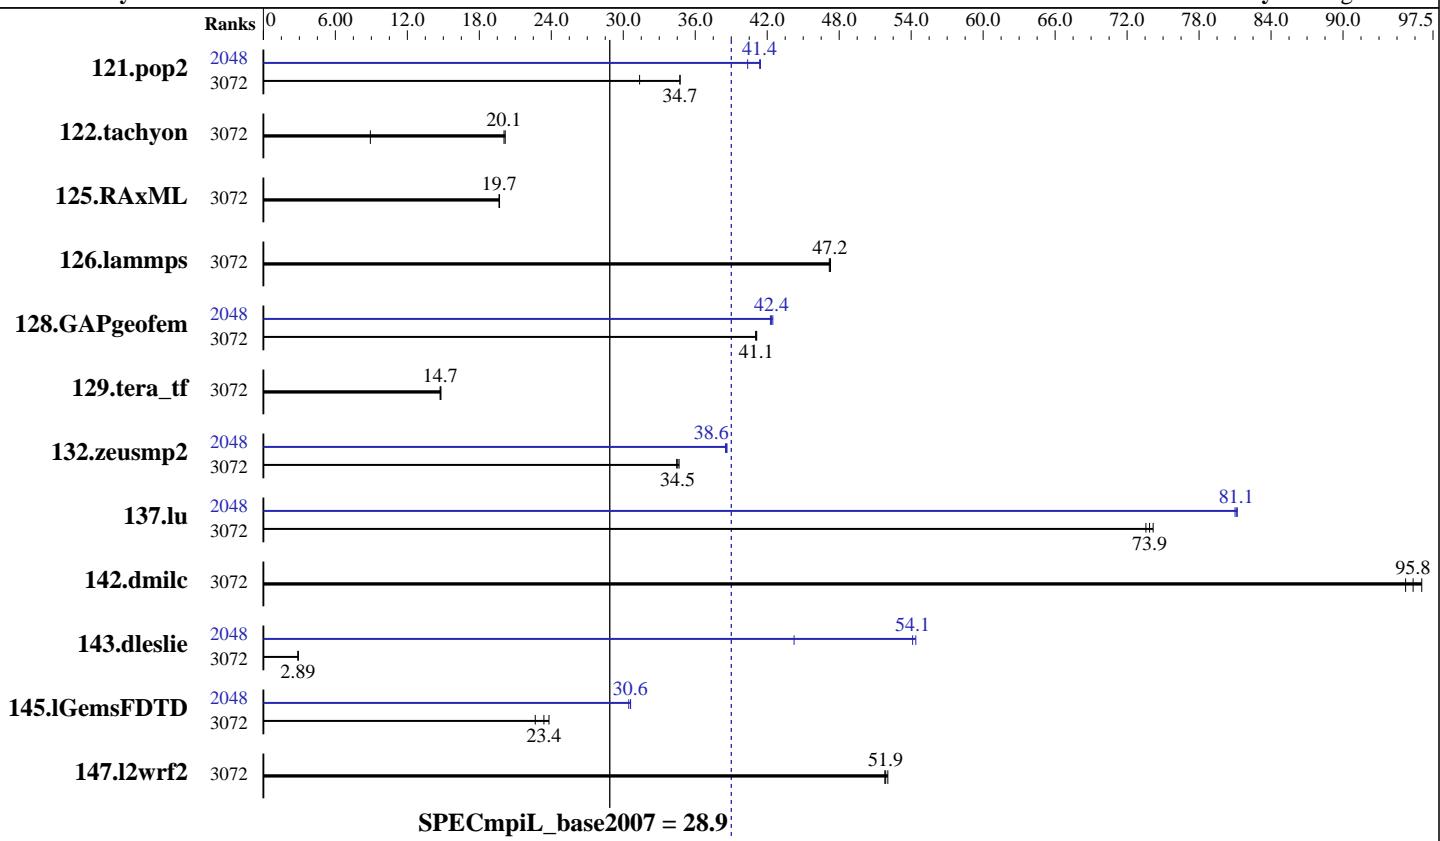

Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
121.pop2	3072	124	31.4	112	34.7	<u>112</u>	<u>34.7</u>	2048	93.9	41.4	<u>94.1</u>	<u>41.4</u>	96.4	40.4
122.tachyon	3072	218	8.92	<u>96.9</u>	<u>20.1</u>	96.4	20.2	3072	218	8.92	<u>96.9</u>	<u>20.1</u>	96.4	20.2
125.RAxML	3072	148	19.7	148	19.7	<u>148</u>	<u>19.7</u>	3072	148	19.7	148	19.7	<u>148</u>	<u>19.7</u>
126.lammps	3072	52.0	47.3	52.1	47.2	<u>52.0</u>	<u>47.2</u>	3072	52.0	47.3	52.1	47.2	<u>52.0</u>	<u>47.2</u>
128.GAPgeomfem	3072	<u>144</u>	<u>41.1</u>	144	41.1	145	41.0	2048	140	42.3	140	42.5	<u>140</u>	<u>42.4</u>
129.tera_tf	3072	<u>74.5</u>	<u>14.7</u>	74.5	14.7	74.2	14.8	3072	<u>74.5</u>	<u>14.7</u>	74.5	14.7	74.2	14.8
132.zeusmp2	3072	61.2	34.7	<u>61.4</u>	<u>34.5</u>	61.5	34.4	2048	54.9	38.6	<u>54.9</u>	<u>38.6</u>	55.0	38.5
137.lu	3072	57.1	73.6	<u>56.9</u>	<u>73.9</u>	56.7	74.2	2048	51.9	81.0	<u>51.8</u>	<u>81.1</u>	51.8	81.2
142.dmilc	3072	38.2	96.6	38.7	95.2	<u>38.4</u>	<u>95.8</u>	3072	38.2	96.6	38.7	95.2	<u>38.4</u>	<u>95.8</u>
143.dleslie	3072	1069	2.90	<u>1072</u>	<u>2.89</u>	1072	2.89	2048	<u>57.3</u>	<u>54.1</u>	70.1	44.2	57.0	54.4
145.lGemsFDTD	3072	<u>189</u>	<u>23.4</u>	195	22.7	185	23.8	2048	<u>145</u>	30.5	144	30.6	<u>144</u>	<u>30.6</u>
147.l2wrf2	3072	158	51.8	158	52.1	<u>158</u>	<u>51.9</u>	3072	<u>158</u>	51.8	158	52.1	<u>158</u>	<u>51.9</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 1



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpiL_peak2007 = 39.0

SPECmpiL_base2007 = 28.9

MPI2007 license: 4

Test date: Jun-2011

Test sponsor: SGI

Hardware Availability: Mar-2011

Tested by: SGI

Software Availability: Aug-2011

Hardware Summary

Type of System:	Homogeneous
Compute Node:	SGI Altix ICE 8400EX Compute Node
Interconnect:	InfiniBand (MPI and I/O)
File Server Node:	SGI InfiniteStorage 4000
Total Compute Nodes:	128
Total Chips:	256
Total Cores:	3072
Total Threads:	3072
Total Memory:	8 TB
Base Ranks Run:	3072
Minimum Peak Ranks:	2048
Maximum Peak Ranks:	3072

Software Summary

C Compiler:	Intel C++ Composer XE 2011 for Linux, Version 12.0.3.174 Build 20110309
C++ Compiler:	Intel C++ Composer XE 2011 for Linux, Version 12.0.3.174 Build 20110309
Fortran Compiler:	Intel Fortran Composer XE 2011 for Linux, Version 12.0.3.174 Build 20110309
Base Pointers:	64-bit
Peak Pointers:	64-bit
MPI Library:	SGI MPT 2.04 Patch 10789
Other MPI Info:	OFED 1.4.2
Pre-processors:	None
Other Software:	None

Node Description: SGI Altix ICE 8400EX Compute Node

Hardware

Number of nodes:	128
Uses of the node:	compute
Vendor:	SGI
Model:	SGI Altix ICE 8400EX (AMD Opteron 6180 SE, 2.5GHz)
CPU Name:	AMD Opteron 6180 SE
CPU(s) orderable:	1-2 chips
Chips enabled:	2
Cores enabled:	24
Cores per chip:	12
Threads per core:	1
CPU Characteristics:	12 Cores/chip, 2.5 GHz
CPU MHz:	2500
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache:	None
Memory:	64 GB (16 x 4 GB, 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	None
Other Hardware:	None
Adapter:	Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)
Number of Adapters:	1
Slot Type:	PCIe x8 Gen2
Data Rate:	InfiniBand 4x QDR
Ports Used:	2
Interconnect Type:	InfiniBand

Software

Adapter:	Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)
Adapter Driver:	OFED-1.4.2
Adapter Firmware:	2.7.0
Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64) Kernel 2.6.32.27-0.2-default
Local File System:	NFSv3
Shared File System:	NFSv3 IPoIB
System State:	Run Level 3 (Multi-User)
Other Software:	SGI Performance Suite 1.0, Build 702r19.sles11-1010072114 SGI Tempo Compute Node 2.2, Build 702r19.sles11-1010072114



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpiL_peak2007 = 39.0

SPECmpiL_base2007 = 28.9

MPI2007 license: 4

Test date: Jun-2011

Test sponsor: SGI

Hardware Availability: Mar-2011

Tested by: SGI

Software Availability: Aug-2011

Node Description: SGI InfiniteStorage 4000

Hardware		Software
Number of nodes:	1	Adapter: Mellanox MT25208 InfiniHost III Ex (PCIe x8 Gen1 2.5 GT/s)
Uses of the node:	fileserver	Adapter Driver: OFED-1.4.2
Vendor:	SGI	Adapter Firmware: 5.3.0
Model:	SGI Altix 450 (Intel Itanium 2, 1.6GHz)	Operating System: SUSE Linux Enterprise Server 11 SP1 (ia64) Kernel 2.6.32.12-0.7-default
CPU Name:	Intel Itanium 2 9030	Local File System: xfs
CPU(s) orderable:	2-38 chips	Shared File System: --
Chips enabled:	2	System State: Run Level 3 (Multi-User)
Cores enabled:	4	Other Software: SGI ProPack 7SP1 for Linux, Build 701r2.sles11-1005242307
Cores per chip:	2	
Threads per core:	1	
CPU Characteristics:	1.6GHz/8MB, 533MHz FSB	
CPU MHz:	1600	
Primary Cache:	16 KB I + 16 KB D on chip per core	
Secondary Cache:	1 MB I + 256 KB D on chip per core	
L3 Cache:	4 MB I+D on chip per core	
Other Cache:	None	
Memory:	24 GB (12 x 2 GB, 2Rx4 PC2-3200-3, ECC)	
Disk Subsystem:	16 TB RAID 5	
Other Hardware:	32 x 500 GB SATA (Seagate Barracuda 7.2K)	
Adapter:	None	
Number of Adapters:	Mellanox MT25208 InfiniHost III Ex (PCIe x8 Gen1 2.5 GT/s)	
Slot Type:	2	
Data Rate:	PCIe x8 Gen1	
Ports Used:	InfiniBand 4x DDR	
Interconnect Type:	2	
	InfiniBand	

Interconnect Description: InfiniBand (MPI and I/O)

Hardware		Software
Vendor:	Mellanox Technologies	
Model:	None	
Switch Model:	Mellanox Infiniscale-IV	
Number of Switches:	16	
Number of Ports:	36	
Data Rate:	InfiniBand 4x QDR	
Firmware:	5040005	
Topology:	Enhanced HyperCube	
Primary Use:	MPI and I/O traffic	



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpiL_peak2007 = 39.0

SPECmpiL_base2007 = 28.9

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Mar-2011

Software Availability: Aug-2011

Submit Notes

The config file option 'submit' was used.

For peak benchmarks that used 2048 MPI ranks, four ranks were assigned to each CPU die, leaving two cores per die idle.

General Notes

Software environment:

```
export MPI_REQUEST_MAX=65536
export MPI_TYPE_MAX=32768
export MPI_BUFS_THRESHOLD=1
ulimit -s unlimited
```

BIOS settings:

AMI BIOS version 1.0a

Job Placement:

In the base run, each MPI job is assigned to a topologically compact set of nodes, i.e. the minimal needed number of switches was used for each job: 1 switch for up to 192 ranks, 2 switches for 384 ranks, 4 switches for 768 ranks, 8 switches for 1536 ranks and 16 switches for 3072 ranks.

Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

126.lammps: icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG

Base Optimization Flags

C benchmarks:

-O3 -xSSE2 -no-prec-div

Continued on next page



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpiL_peak2007 = 39.0

SPECmpiL_base2007 = 28.9

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Mar-2011

Software Availability: Aug-2011

Base Optimization Flags (Continued)

C++ benchmarks:

126.lammps: -O3 -xsse2 -no-prec-div -ansi-alias

Fortran benchmarks:

-O3 -xsse2 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xsse2 -no-prec-div

Peak Optimization Flags

C benchmarks:

122.tachyon: basepeak = yes

125.RAxML: basepeak = yes

142.dmilc: basepeak = yes

C++ benchmarks:

126.lammps: basepeak = yes

Fortran benchmarks:

129.tera_tf: basepeak = yes

137.lu: -O3 -xsse2 -no-prec-div

143.dleslie: Same as 137.lu

145.lGemsFDTD: Same as 137.lu

Benchmarks using both Fortran and C:

121.pop2: -O3 -xsse2 -no-prec-div

128.GAPgeofem: Same as 121.pop2

132.zeusmp2: Same as 121.pop2

147.l2wrf2: basepeak = yes



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpiL_peak2007 = 39.0

SPECmpiL_base2007 = 28.9

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Mar-2011

Software Availability: Aug-2011

Other Flags

C benchmarks:
-lmpi

C++ benchmarks:

126.lammps: -lmpi

Fortran benchmarks:
-lmpi

Benchmarks using both Fortran and C:
-lmpi

The flags file that was used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel12_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel12_flags.xml

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.

Report generated on Tue Jul 22 13:43:41 2014 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 14 July 2011.