



SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
(AMD EPYC 7742 CPU, 2.25 GHz)

SPECmpiM_peak2007 = Not Run

SPECmpiM_base2007 = 17.4

MPI2007 license: 28


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

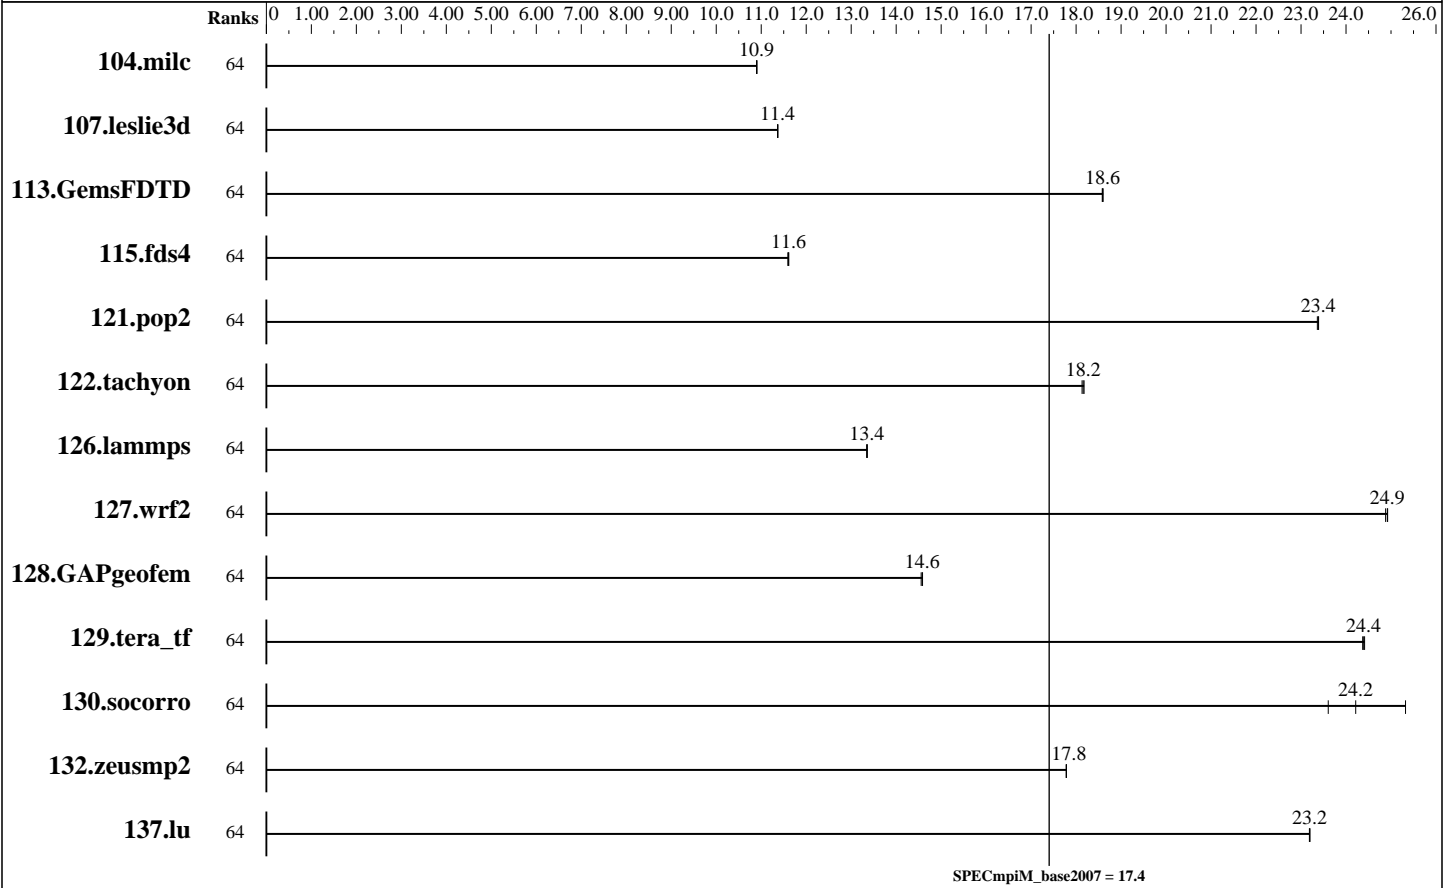

Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
104.milc	64	144	10.9	144	10.9	144	10.9									
107.leslie3d	64	459	11.4	459	11.4	459	11.4									
113.GemsFDTD	64	339	18.6	339	18.6	339	18.6									
115.fds4	64	168	11.6	168	11.6	168	11.6									
121.pop2	64	177	23.4	177	23.4	176	23.4									
122.tachyon	64	154	18.2	154	18.1	154	18.2									
126.lammps	64	218	13.4	218	13.4	218	13.3									
127.wrf2	64	313	24.9	313	24.9	313	24.9									
128.GAPgeofem	64	142	14.6	142	14.6	142	14.6									
129.tera_tf	64	113	24.4	113	24.4	114	24.4									

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECmpiM_peak2007 = Not Run

ThinkSystem SR655
(AMD EPYC 7742 CPU, 2.25 GHz)

SPECmpiM_base2007 = 17.4

MPI2007 license: 28

Test date: Jul-2019

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

Results Table (Continued)

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	64	162	23.6	151	25.3	<u>158</u>	<u>24.2</u>							
132.zeusmp2	64	174	17.8	<u>174</u>	<u>17.8</u>	175	17.8							
137.lu	64	159	23.2	158	23.2	<u>158</u>	<u>23.2</u>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Hardware Summary

Type of System: Homogeneous
 Compute Node: ThinkSystem SR655
 Total Compute Nodes: 1
 Total Chips: 1
 Total Cores: 64
 Total Threads: 64
 Total Memory: 256 GB
 Base Ranks Run: 64
 Minimum Peak Ranks: --
 Maximum Peak Ranks: --

Software Summary

C Compiler: Intel C++ Compiler 17.0 Update 7 for Linux
 Version 17.0.7 Build 20180403
 C++ Compiler: Intel C++ Compiler 17.0 Update 7 for Linux
 Version 17.0.7 Build 20180403
 Fortran Compiler: Intel Fortran Compiler 17.0 Update 7 for Linux
 Version 17.0.7 Build 20180403
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 MPI Library: Intel MPI Library for Linux* OS
 Version 2018 Update 3 Build 20180411
 Other MPI Info: None
 Pre-processors: No
 Other Software: None

Node Description: ThinkSystem SR655

Hardware

Number of nodes: 1
 Uses of the node: compute
 Vendor: Lenovo Global Technology
 Model: SR655
 CPU Name: AMD EPYC 7742 CPU
 CPU(s) orderable: 1 chips
 Chips enabled: 1
 Cores enabled: 64
 Cores per chip: 64
 Threads per core: 1
 CPU Characteristics: Turbo up to 3.4 GHz
 CPU MHz: 2250
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 256 MB I+D on chip per chip
 16 MB shared / 4 cores
 Other Cache: None
 Memory: 256 GB (8 x 32 GB 2Rx8 PC4-3200AA-R)
 Disk Subsystem: 1 x 480 GB SATA 2.5" SSD
 Other Hardware: None
 Adapter: None
 Number of Adapters: 0
 Slot Type: None
 Data Rate: None

Software

Adapter: None
 Adapter Driver: None
 Adapter Firmware: None
 Operating System: SUSE Linux Enterprise Linux Server 12
 4.12.14-94.41-default
 Local File System: xfs
 Shared File System: None
 System State: Multi-user, run level 3
 Other Software: None

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECmpiM_peak2007 = Not Run

ThinkSystem SR655
(AMD EPYC 7742 CPU, 2.25 GHz)

SPECmpiM_base2007 = 17.4

MPI2007 license: 28

Test date: Jul-2019

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

Node Description: ThinkSystem SR655

Ports Used: 0
Interconnect Type: None

Submit Notes

The config file option 'submit' was used.

General Notes

MPI startup command:
mpiexec command was used to start MPI jobs.

RAM configuration:
Compute nodes have 1 x 32 GB RDIMM on each memory channel.

BIOS settings:
Operating Mode : Maximum Performance Mode
Symmetric Multithreading: Disabled
NUMA node per socket: NPS4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Base Compiler Invocation

C benchmarks:
mpiicc

C++ benchmarks:
126.lammps: mpiicpc

Fortran benchmarks:
mpiifort

Benchmarks using both Fortran and C:
mpiicc mpiifort



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECmpiM_peak2007 = Not Run

ThinkSystem SR655
(AMD EPYC 7742 CPU, 2.25 GHz)

SPECmpiM_base2007 = 17.4

MPI2007 license: 28

Test date: Jul-2019

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

Base Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG
126.lammps: -DMPICH_IGNORE_CXX_SEEK
127.wrf2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX
130.socorro: -assume nostd_intent_in

Base Optimization Flags

C benchmarks:

-O3 -march=core-avx2 -no-prec-div -ipo

C++ benchmarks:

126.lammps: -O3 -march=core-avx2 -no-prec-div -ipo

Fortran benchmarks:

-O3 -march=core-avx2 -no-prec-div -ipo

Benchmarks using both Fortran and C:

-O3 -march=core-avx2 -no-prec-div -ipo

The flags files that were used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.20190807.html

http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM_Platform_Flags.20190807.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.20190807.xml

http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM_Platform_Flags.20190807.xml

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.

Report generated on Wed Aug 7 19:01:08 2019 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 6 August 2019.