



# SPEC® MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Altix ICE 8400EX  
(Intel Xeon X5670, 2.93 GHz)

**SPECmpiL\_peak2007 = Not Run**

**SPECmpiL\_base2007 = 11.6**

**MPI2007 license:** 4


**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Apr-2010

**Hardware Availability:** May-2010

**Software Availability:** Feb-2010

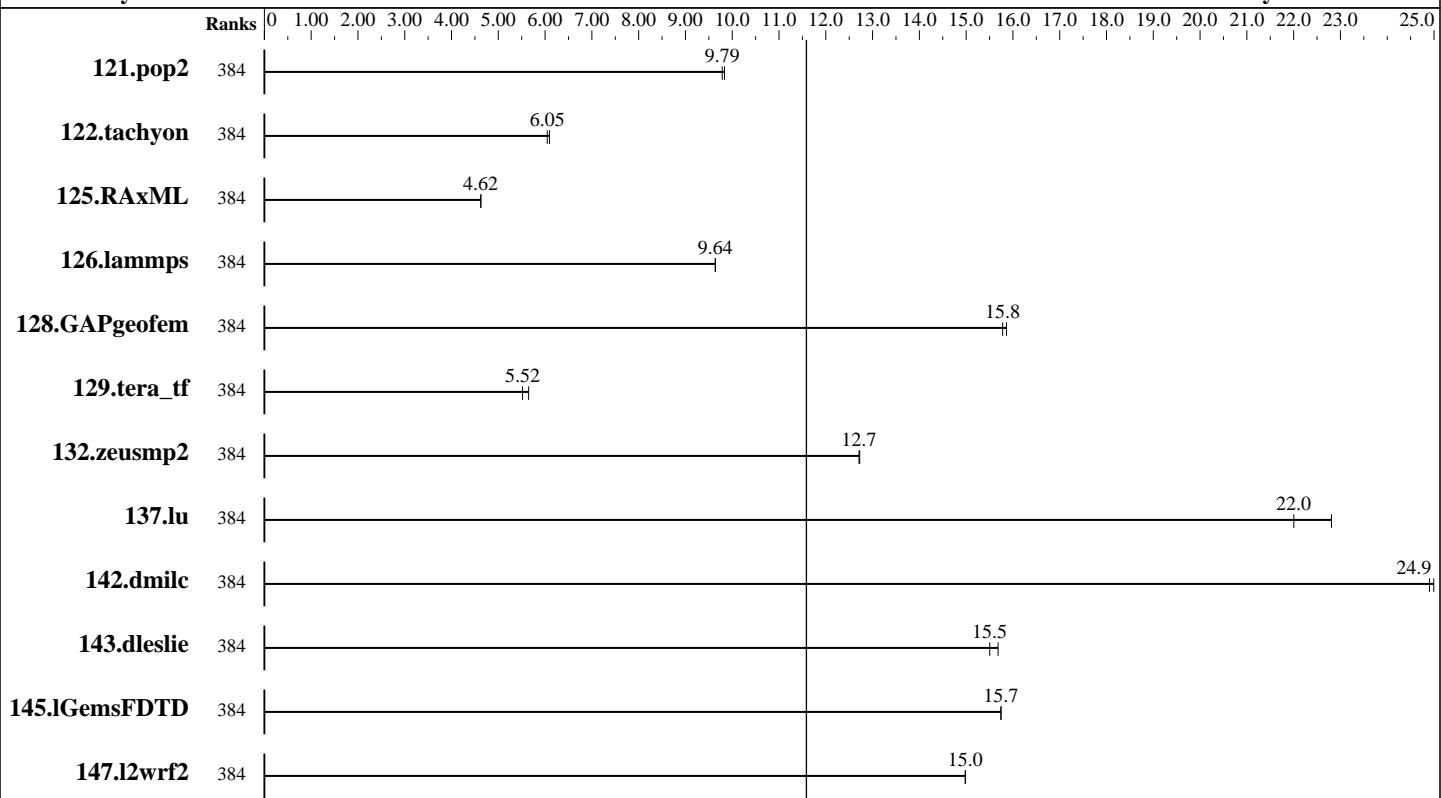

## Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
121.pop2	384	<b><u>398</u></b>	<b><u>9.79</u></b>	396	9.83									
122.tachyon	384	<b><u>322</u></b>	<b><u>6.05</u></b>	319	6.09									
125.RAxML	384	<b><u>631</u></b>	<b><u>4.62</u></b>	631	4.63									
126.lammps	384	<b><u>255</u></b>	<b><u>9.64</u></b>	255	9.64									
128.GAPgeofem	384	374	15.9	<b><u>376</u></b>	<b><u>15.8</u></b>									
129.tera_tf	384	195	5.65	<b><u>199</u></b>	<b><u>5.52</u></b>									
132.zeusmp2	384	<b><u>167</u></b>	<b><u>12.7</u></b>	167	12.7									
137.lu	384	184	22.8	<b><u>191</u></b>	<b><u>22.0</u></b>									
142.dmilc	384	147	25.0	<b><u>148</u></b>	<b><u>24.9</u></b>									
143.dleslie	384	<b><u>200</u></b>	<b><u>15.5</u></b>	198	15.7									
145.lGemsFDTD	384	280	15.7	<b><u>280</u></b>	<b><u>15.7</u></b>									
147.l2wrf2	384	547	15.0	<b><u>548</u></b>	<b><u>15.0</u></b>									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 1



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Altix ICE 8400EX  
(Intel Xeon X5670, 2.93 GHz)

**SPECmpiL\_peak2007 = Not Run**

**SPECmpiL\_base2007 = 11.6**

**MPI2007 license:** 4

**Test date:** Apr-2010

**Test sponsor:** SGI

**Hardware Availability:** May-2010

**Tested by:** SGI

**Software Availability:** Feb-2010

## Hardware Summary

Type of System:	Homogeneous
Compute Node:	SGI Altix ICE 8400EX Compute Node
Interconnects:	InfiniBand (MPI) InfiniBand (I/O)
File Server Node:	SGI InfiniteStorage Nexas 2000 NAS
Total Compute Nodes:	32
Total Chips:	64
Total Cores:	384
Total Threads:	768
Total Memory:	768 GB
Base Ranks Run:	384
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--

## Software Summary

C Compiler:	Intel C Compiler for Linux Version 11.1, Build 20100203
C++ Compiler:	Intel C++ Compiler for Linux Version 11.1, Build 20100203
Fortran Compiler:	Intel Fortran Compiler for Linux Version 11.1, Build 20100203
Base Pointers:	64-bit
Peak Pointers:	64-bit
MPI Library:	SGI MPT 1.26
Other MPI Info:	OFED 1.4.1
Pre-processors:	None
Other Software:	None

## Node Description: SGI Altix ICE 8400EX Compute Node

### Hardware

Number of nodes:	32
Uses of the node:	compute
Vendor:	SGI
Model:	SGI Altix ICE 8400EX (Intel Xeon X5670, 2.93 GHz)
CPU Name:	Intel Xeon X5670
CPU(s) orderable:	1-2 chips
Chips enabled:	2
Cores enabled:	12
Cores per chip:	6
Threads per core:	2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.33 GHz Hyper-Threading Technology enabled
CPU MHz:	2933
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6*4GB DDR3-1333 CL9 RDIMMs)
Disk Subsystem:	None
Other Hardware:	None
Adapter:	Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)
Number of Adapters:	1
Slot Type:	PCIe x8 Gen2
Data Rate:	InfiniBand 4x QDR
Ports Used:	2
Interconnect Type:	InfiniBand

### Software

Adapter:	Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)
Adapter Driver:	OFED-1.4.1
Adapter Firmware:	2.7.0
Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP3 Kernel 2.6.16.60-0.54.5-smp
Local File System:	NFSv3
Shared File System:	NFSv3 IPoIB
System State:	Multi-user, run level 3
Other Software:	SGI ProPack 6 for Linux Service Pack 6, SGI Tempo V 1.10



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Altix ICE 8400EX  
(Intel Xeon X5670, 2.93 GHz)

**SPECmpiL\_peak2007 = Not Run**

**SPECmpiL\_base2007 = 11.6**

**MPI2007 license:** 4

**Test date:** Apr-2010

**Test sponsor:** SGI

**Hardware Availability:** May-2010

**Tested by:** SGI

**Software Availability:** Feb-2010

## Node Description: SGI InfiniteStorage Nexus 2000 NAS

<b>Hardware</b>		<b>Software</b>
Number of nodes:	1	Adapter: Mellanox MT25208 InfiniHost III Ex (PCIe x8 Gen1 2.5 GT/s)
Uses of the node:	fileserver	Adapter Driver: OFED-1.3
Vendor:	SGI	Adapter Firmware: 5.3.0
Model:	SGI Altix XE 240 (Intel Xeon 5140, 2.33 GHz)	Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1 Kernel 2.6.16.54-0.2.5-smp xfs
CPU Name:	Intel Xeon 5140	Local File System: --
CPU(s) orderable:	1-2 chips	Shared File System: Multi-user, run level 5
Chips enabled:	2	System State: SGI ProPack 5 for Linux Service Pack 5
Cores enabled:	4	Other Software:
Cores per chip:	2	
Threads per core:	1	
CPU Characteristics:	1333 MHz FSB	
CPU MHz:	2333	
Primary Cache:	32 KB I + 32 KB D on chip per core	
Secondary Cache:	4 MB I+D on chip per chip	
L3 Cache:	None	
Other Cache:	None	
Memory:	16 GB (8*2GB DDR2-667MHz DIMMS)	
Disk Subsystem:	4.3 TB RAID 5 48 x 146 GB SAS (Seagate Cheetah 15K.5)	
Other Hardware:	None	
Adapter:	Mellanox MT25208 InfiniHost III Ex (PCIe x8 Gen1 2.5 GT/s)	
Number of Adapters:	2	
Slot Type:	PCIe x8 Gen1	
Data Rate:	InfiniBand 4x DDR	
Ports Used:	2	
Interconnect Type:	InfiniBand	

## Interconnect Description: InfiniBand (MPI)

<b>Hardware</b>		<b>Software</b>
Vendor:	Mellanox Technologies	
Model:	MT26428 ConnectX	
Switch Model:	Mellanox MT48436 InfiniScale-IV	
Number of Switches:	128	
Number of Ports:	36	
Data Rate:	InfiniBand 4x QDR	
Firmware:	5030004	
Topology:	Bristle hypercube	
Primary Use:	MPI traffic	



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Altix ICE 8400EX  
(Intel Xeon X5670, 2.93 GHz)

**SPECmpiL\_peak2007 = Not Run**

**SPECmpiL\_base2007 = 11.6**

**MPI2007 license:** 4

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Apr-2010

**Hardware Availability:** May-2010

**Software Availability:** Feb-2010

## Interconnect Description: InfiniBand (I/O)

### Hardware

Vendor: Mellanox Technologies  
Model: MT26428 ConnectX  
Switch Model: Mellanox MT48436 InfiniScale-IV  
Number of Switches: 64  
Number of Ports: 36  
Data Rate: InfiniBand 4x QDR  
Firmware: 5030004  
Topology: Bristle hypercube  
Primary Use: I/O traffic

### Software

## Submit Notes

The config file option 'submit' was used.

## General Notes

Software environment:

```
export MPI_REQUEST_MAX=65536
export MPI_TYPE_MAX=32768
export MPI_BUFS_THRESHOLD=1
export MPI_DSM_DISTRIBUTE=yes
export MPI_IB_RAILS=2
ulimit -s unlimited
```

BIOS settings:

```
AMI BIOS version 8.16
Hyper-Threading Technology enabled (default)
Intel Turbo Boost Technology enabled (default)
Intel Turbo Boost Technology activated in the OS via
/etc/init.d/acpid start
/etc/init.d/powersaved start
powersave -f
```

Job Placement:

Each MPI job was assigned to a topologically compact set of nodes, i.e. the minimal needed number of switches was used for each job: 2 switches for 96 ranks, 4 switches for 192 ranks, 8 switches for 384 ranks, 16 switches for 768 ranks, 32 switches for 1536 ranks, 64 switches for 3072 ranks.

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Altix ICE 8400EX  
(Intel Xeon X5670, 2.93 GHz)

**SPECmpiL\_peak2007 = Not Run**

**SPECmpiL\_base2007 = 11.6**

**MPI2007 license:** 4

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Apr-2010

**Hardware Availability:** May-2010

**Software Availability:** Feb-2010

## Base Compiler Invocation (Continued)

C++ benchmarks:

126.lammps: icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG

## Base Optimization Flags

C benchmarks:

-O3 -xSSE4.2 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xSSE4.2 -no-prec-div -ansi-alias

Fortran benchmarks:

-O3 -xSSE4.2 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xSSE4.2 -no-prec-div

## Base Other Flags

C benchmarks:

-lmpi

C++ benchmarks:

126.lammps: -lmpi

Fortran benchmarks:

-lmpi

Benchmarks using both Fortran and C:

-lmpi



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Altix ICE 8400EX  
(Intel Xeon X5670, 2.93 GHz)

**SPECmpiL\_peak2007 = Not Run**

**SPECmpiL\_base2007 = 11.6**

**MPI2007 license:** 4

**Test date:** Apr-2010

**Test sponsor:** SGI

**Hardware Availability:** May-2010

**Tested by:** SGI

**Software Availability:** Feb-2010

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel111\\_flags.20100202.html](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel111_flags.20100202.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel111\\_flags.20100202.xml](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel111_flags.20100202.xml)

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.

Report generated on Tue Jul 22 13:40:12 2014 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 20 May 2010.