



SPEC® MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise


SGI 8600
(Intel Xeon Gold 6148, 2.40 GHz)

SPECmpiL_peak2007 = 144

SPECmpiL_base2007 = 133

MPI2007 license: 1
Test sponsor: HPE
Tested by: HPE

Test date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Nov-2017

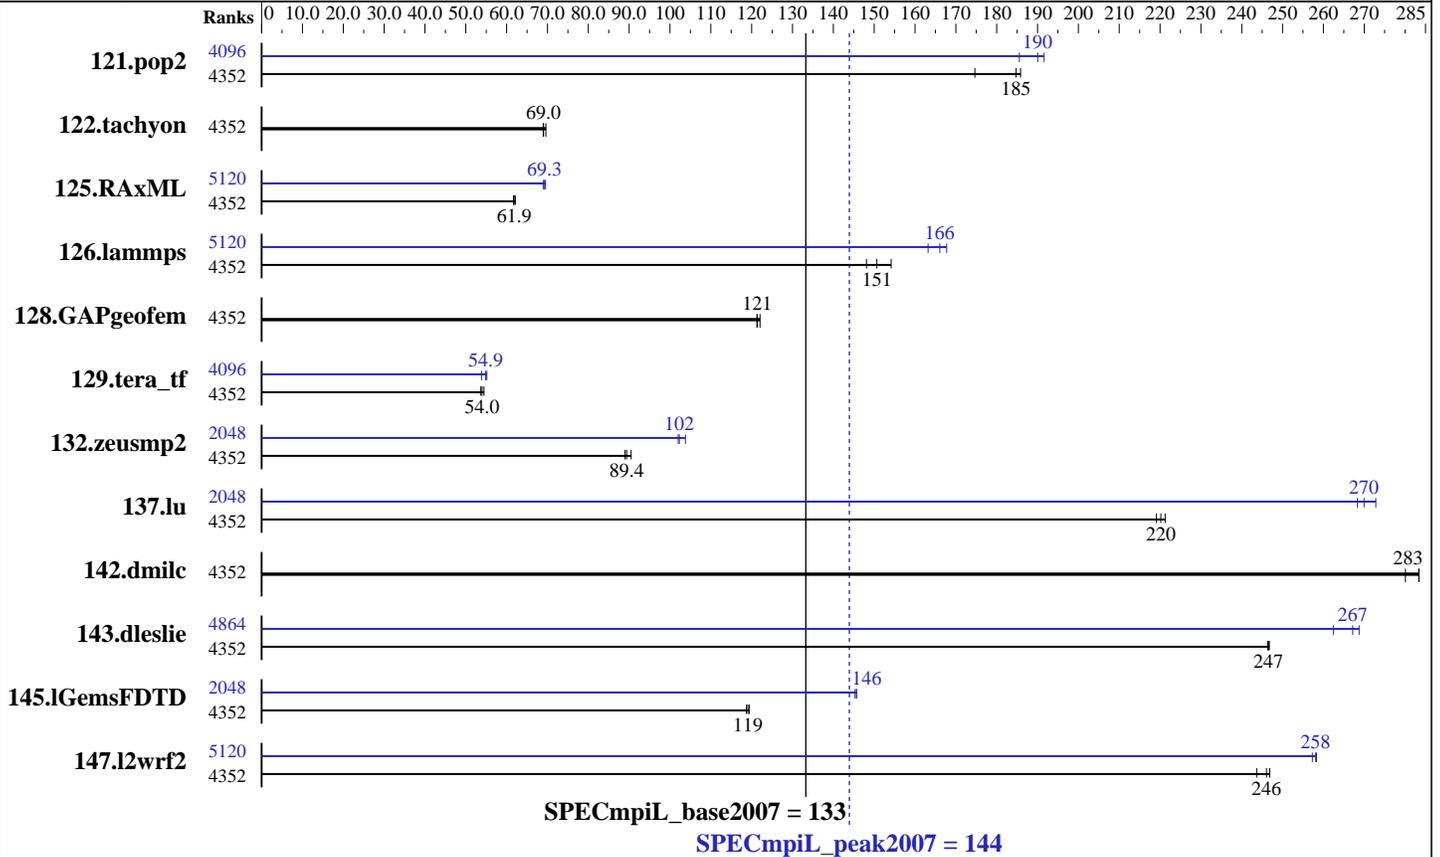

Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
121.pop2	4352	22.3	175	20.9	186	21.1	185	4096	21.0	186	20.5	190	20.3	192		
122.tachyon	4352	28.2	69.0	27.9	69.6	28.2	69.0	4352	28.2	69.0	27.9	69.6	28.2	69.0		
125.RAxML	4352	47.2	61.9	47.0	62.1	47.3	61.7	5120	42.1	69.3	42.0	69.5	42.3	68.9		
126.lammps	4352	16.6	148	16.3	151	16.0	154	5120	14.7	168	15.1	163	14.8	166		
128.GAPgeofem	4352	48.9	121	48.9	121	48.6	122	4352	48.9	121	48.9	121	48.6	122		
129.tera_tf	4352	20.5	53.7	20.4	54.0	20.2	54.5	4096	20.4	53.9	20.0	54.9	19.9	55.2		
132.zeusmp2	4352	23.4	90.5	23.8	89.0	23.7	89.4	2048	20.4	104	20.8	102	20.7	102		
137.lu	4352	19.0	221	19.2	219	19.1	220	2048	15.7	268	15.6	270	15.4	273		
142.dmilc	4352	13.0	283	13.2	280	13.0	283	4352	13.0	283	13.2	280	13.0	283		
143.dleslie	4352	12.6	247	12.6	246	12.6	247	4864	11.5	269	11.8	262	11.6	267		
145.lGemsFDTD	4352	37.0	119	37.2	119	36.9	119	2048	30.3	146	30.3	146	30.4	145		
147.l2wrf2	4352	33.3	246	33.7	244	33.2	247	5120	31.8	258	31.8	258	31.9	257		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

SPECmpiL_peak2007 = 144

SGI 8600
(Intel Xeon Gold 6148, 2.40 GHz)

SPECmpiL_base2007 = 133

MPI2007 license: 1
Test sponsor: HPE
Tested by: HPE

Test date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Nov-2017

Hardware Summary

Type of System: Homogeneous
Compute Node: HPE XA730i Gen10 Server Node
Interconnect: InfiniBand (MPI and I/O)
File Server Node: Lustre FS
Total Compute Nodes: 128
Total Chips: 256
Total Cores: 5120
Total Threads: 10240
Total Memory: 24 TB
Base Ranks Run: 4352
Minimum Peak Ranks: 2048
Maximum Peak Ranks: 5120

Software Summary

C Compiler: Intel C Composer XE for Linux, Version 18.0.0.128 Build 20170811
C++ Compiler: Intel C++ Composer XE for Linux, Version 18.0.0.128 Build 20170811
Fortran Compiler: Intel Fortran Composer XE for Linux, Version 18.0.0.128 Build 20170811
Base Pointers: 64-bit
Peak Pointers: 64-bit
MPI Library: HPE Performance Software - Message Passing Interface 2.17
Other MPI Info: OFED 3.2.2
Pre-processors: None
Other Software: None

Node Description: HPE XA730i Gen10 Server Node

Hardware

Number of nodes: 128
Uses of the node: compute
Vendor: Hewlett Packard Enterprise
Model: SGI 8600 (Intel Xeon Gold 6148, 2.40 GHz)
CPU Name: Intel Xeon Gold 6148
CPU(s) orderable: 1-2 chips
Chips enabled: 2
Cores enabled: 40
Cores per chip: 20
Threads per core: 2
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz: 2400
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core
L3 Cache: 27.5 MB I+D on chip per chip
Other Cache: None
Memory: 192 GB (12 x 16 GB 2Rx4 PC4-2666V-R)
Disk Subsystem: None
Other Hardware: None
Adapter: Mellanox MT27700 with ConnectX-4 ASIC
Number of Adapters: 2
Slot Type: PCIe x16 Gen3 8GT/s
Data Rate: InfiniBand 4X EDR
Ports Used: 1
Interconnect Type: InfiniBand

Software

Adapter: Mellanox MT27700 with ConnectX-4 ASIC
Adapter Driver: OFED-3.4-2.1.8.0
Adapter Firmware: 12.18.1000
Operating System: Red Hat Enterprise Linux Server 7.3 (Maipo), Kernel 3.10.0-514.2.2.el7.x86_64
Local File System: LFS
Shared File System: LFS
System State: Multi-user, run level 3
Other Software: SGI Management Center Compute Node 3.5.0, Build 716r171.rhel73-1705051353

Node Description: Lustre FS

Hardware

Number of nodes: 4
Uses of the node: fileserver

Software

Adapter: Mellanox MT27700 with ConnectX-4 ASIC
Adapter Driver: OFED-3.3-1.0.0.0

Continued on next page

Continued on next page



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

SPECmpiL_peak2007 = 144

SGI 8600
(Intel Xeon Gold 6148, 2.40 GHz)

SPECmpiL_base2007 = 133

MPI2007 license: 1
Test sponsor: HPE
Tested by: HPE

Test date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Nov-2017

Node Description: Lustre FS

Vendor: Hewlett Packard Enterprise
Model: Rackable C1104-GP2 (Intel Xeon E5-2690 v3, 2.60 GHz)
CPU Name: Intel Xeon E5-2690 v3
CPU(s) orderable: 1-2 chips
Chips enabled: 2
Cores enabled: 24
Cores per chip: 12
Threads per core: 1
CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 Hyper-Threading Technology disabled
CPU MHz: 2600
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 684 TB RAID 6
 48 x 8+2 2TB 7200 RPM
Other Hardware: None
Adapter: Mellanox MT27700 with ConnectX-4 ASIC
Number of Adapters: 2
Slot Type: PCIe x16 Gen3
Data Rate: InfiniBand 4X EDR
Ports Used: 1
Interconnect Type: InfiniBand

Adapter Firmware: 12.14.2036
Operating System: Red Hat Enterprise Linux Server 7.3 (Maipo),
 Kernel 3.10.0-514.2.2.el7.x86_64
Local File System: ext3
Shared File System: LFS
System State: Multi-user, run level 3
Other Software: None

Interconnect Description: InfiniBand (MPI and I/O)

Hardware

Vendor: Mellanox Technologies and SGI
Model: SGI P0002145
Switch Model: SGI P0002145
Number of Switches: 30
Number of Ports: 36
Data Rate: InfiniBand 4X EDR
Firmware: 11.0350.0394
Topology: Enhanced Hypercube
Primary Use: MPI and I/O traffic

Software

Base Tuning Notes

src.alt used: 143.dleslie->integer_overflow



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

SGI 8600
(Intel Xeon Gold 6148, 2.40 GHz)

SPECmpiL_peak2007 = 144

SPECmpiL_base2007 = 133

MPI2007 license: 1

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Nov-2017

Submit Notes

The config file option 'submit' was used.

General Notes

Software environment:

```
export MPI_REQUEST_MAX=65536
export MPI_TYPE_MAX=32768
export MPI_IB_RAILS=2
export MPI_IB_IMM_UPGRADE=false
export MPI_CONNECTIONS_THRESHOLD=0
export MPI_IB_DCIS=2
export MPI_IB_HYPER_LAZY=false
ulimit -s unlimited
```

BIOS settings:

AMI BIOS version SAED7177, 07/17/2017

Job Placement:

Each MPI job was assigned to a topologically compact set of nodes.

Additional notes regarding interconnect:

The Infiniband network consists of two independent planes, with half the switches in the system allocated to each plane. I/O traffic is restricted to one plane, while MPI traffic can use both planes.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

126.lammps: icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

SGI 8600
(Intel Xeon Gold 6148, 2.40 GHz)

SPECmpiL_peak2007 = 144

SPECmpiL_base2007 = 133

MPI2007 license: 1
Test sponsor: HPE
Tested by: HPE

Test date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Nov-2017

Base Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG

Base Optimization Flags

C benchmarks:

-O3 -xCORE-AVX512 -no-prec-div -ipo

C++ benchmarks:

126.lammps: -O3 -xCORE-AVX512 -no-prec-div -ansi-alias -ipo

Fortran benchmarks:

-O3 -xCORE-AVX512 -no-prec-div -ipo

Benchmarks using both Fortran and C:

-O3 -xCORE-AVX512 -no-prec-div -ipo

Base Other Flags

C benchmarks:

-lmpi

C++ benchmarks:

126.lammps: -lmpi

Fortran benchmarks:

-lmpi

Benchmarks using both Fortran and C:

-lmpi

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

125.RAxML: /sw/sdev/intel/parallel_studio_xe_2017_update4/compilers_and_libraries_2017.4.196/linux/bin/intel64/icc

C++ benchmarks:

126.lammps: icpc

Continued on next page



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

SPECmpiL_peak2007 = 144

SGI 8600
(Intel Xeon Gold 6148, 2.40 GHz)

SPECmpiL_base2007 = 133

MPI2007 license: 1
Test sponsor: HPE
Tested by: HPE

Test date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Nov-2017

Peak Compiler Invocation (Continued)

Fortran benchmarks (except as noted below):

ifort

143.dleslie: /sw/sdev/intel/parallel_studio_xe_2017_update4/compilers_and_libraries_2017.4.196/linux/bin/intel64/ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

122.tachyon: basepeak = yes

125.RAxML: -O3 -xCORE-AVX512 -no-prec-div -ipo

142.dmilc: basepeak = yes

C++ benchmarks:

126.lammps: -O3 -xCORE-AVX512 -no-prec-div -ansi-alias -ipo

Fortran benchmarks:

-O3 -xCORE-AVX512 -no-prec-div -ipo

Benchmarks using both Fortran and C:

121.pop2: -O3 -xCORE-AVX512 -no-prec-div -ipo

128.GAPgeofem: basepeak = yes

132.zeusmp2: Same as 121.pop2

147.l2wrf2: Same as 121.pop2

Peak Other Flags

Same as Base Other Flags



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

SGI 8600
(Intel Xeon Gold 6148, 2.40 GHz)

SPECmpiL_peak2007 = 144

SPECmpiL_base2007 = 133

MPI2007 license: 1

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Nov-2017

The flags file that was used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/HPE_x86_64_Intel18_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/mpi2007/flags/HPE_x86_64_Intel18_flags.xml

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.
Report generated on Wed Oct 25 17:12:11 2017 by SPEC MPI2007 PS/PDF formatter v1463.
Originally published on 25 October 2017.