OMPM2001 Result

Copyright 1999-2008, Standard Performance Evaluation Corporation

Cisco Systems
Cisco B200-M1

SPECompMpeak2001 = --

SPECompMbase2001 = 43593

SPEC license #:HPG9019 | Tested by: Cisco Systems | Test site: -- | Test date: Mar-2009 | Hardware Avail: Mar-2009 | Software Avail: Mar-2009

Benchmark	Reference Time	Base Runtime	Base Ratio	Peak Runtime	Peak Ratio
310.wupwise_m	6000	80.6	74408		
312.swim_m	6000	161	37354		
314.mgrid_m	7300	212	34387		
316.applu_m	4000	139	28775		
318.galgel_m	5100	121	42151		
320.equake_m	2600	54.9	47335		
324.apsi_m	3400	89.5	37999		
326.gafort_m	8700	170	51319		
328.fma3d_m	4600	157	29305		
330.art_m	6400	54.8	116820		
332.ammp_m	7000	237	29495		

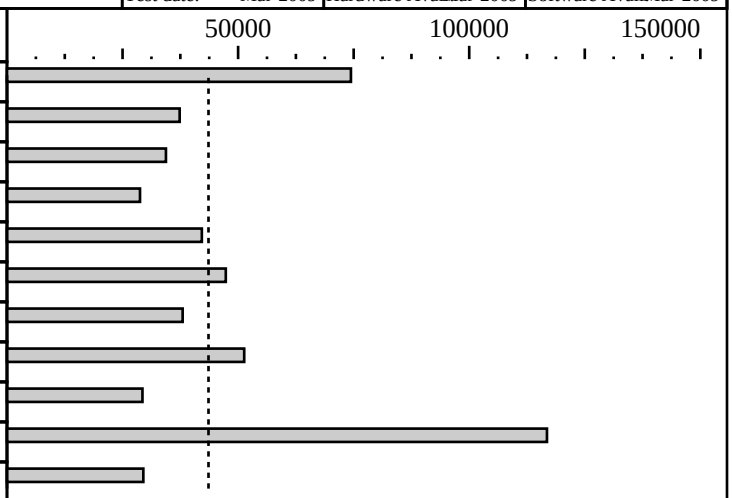

Hardware

CPU:	Intel(R) Xeon 5570
CPU MHz:	2930
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32KB(I)+32KB(D)/core on chip
Secondary Cache:	256KB/core (I+D) on chip
L3 Cache:	8192KB (I+D) on chip
Other Cache:	N/A
Memory:	6x4GB RDIMM DDR3-1333
Disk Subsystem:	SEAGATE ST9733402SS 73GB, 15K RPM SAS Drive
Other Hardware:	

Software

OpenMP Threads:	16
Parallel:	OpenMP
Operating System:	Red Hat EL 5.3, Linux Kernel 2.6.18-128.el5 SMP x86_64
Compiler:	Intel C/C++ Compiler 11.0 for Linux (11.0.081 build) Intel FORTRAN Compiler 11.0 for Linux (11.0.081 build) GNU C Compiler 4.1.2
File System:	Linux ext2
System State:	Default

Notes/Tuning Information

```
BIOS settings notes:
  Intel Hyper-Threading Technology (SMT): Enabled (default is Enabled)
  Intel Turbo Boost Technology (Turbo)  : Enabled (default is Enabled)

 Baseline optimization flags:
  COPTIMIZE = -O3 -xSSE4.2 -ipo -openmp -ansi_alias
  FOPTIMIZE = -O3 -xSSE4.2 -ipo -openmp
  OPTIMIZE = -O3 -xSSE4.2 -ipo -openmp
 Additional flags for medium:
 export KMP_AFFINITY=compact,0
 export KMP_LIBRARY=turnaround
 export KMP_STACKSIZE=31M
 export KMP_BLOCKTIME=infinite
 export OMP_DYNAMIC=FALSE
 ONESTEP=yes
 ulimit -s 64000
    Portability Flags:
        318.galgel_m: -FI -132
    Extra Flags:
        330.art_m: -DINTS_PER_CACHELINE=32 -DDBLS_PER_CACHELINE=16
        all: -gcc-name=/usr/bin/gcc
```

Copyright 1999-2008, Standard Performance Evaluation Corporation

Cisco Systems
Cisco B200-M1

SPECompMpeak2001 = --

SPECompMbase2001 = 43593

SPEC license #1HPG9019	Tested by: Cisco Systems	Test site: --	Test date: Mar-2009	Hardware Avail:Mar-2009	Software Avail:Mar-2009

Notes/Tuning Information (Continued)

For compiler/openmp flags description please refer:
Cisco-ic11.0-intel64-linux-flags-file.html in flags directory.