OMPM2001 Result

Copyright 1999-2008, Standard Performance Evaluation Corporation

Intel Corporation
Endeavor Node(Intel SR1600UR)

SPECompMpeak2001 = 48538

SPECompMbase2001 = 47499

SPEC license #:HPG0013 | Tested by: Intel Corporation | Test site: -- | Test date: Feb-2010 | Hardware Avail: Mar-2010 | Software Avail: Feb-2010

Benchmark	Reference Time	Base Runtime	Base Ratio	Peak Runtime	Peak Ratio
310.wupwise_m	6000	74.5	80516	74.6	80432
312.swim_m	6000	158	38012	138	43337
314.mgrid_m	7300	195	37438	195	37400
316.applu_m	4000	115	34659	115	34659
318.galgel_m	5100	113	45155	113	44992
320.equake_m	2600	52.9	49105	52.5	49482
324.apsi_m	3400	70.1	48499	70.1	48498
326.gafort_m	8700	166	52301	164	52945
328.fma3d_m	4600	140	32798	133	34700
330.art_m	6400	51.0	125476	48.9	130796
332.ammp_m	7000	232	30208	233	30051

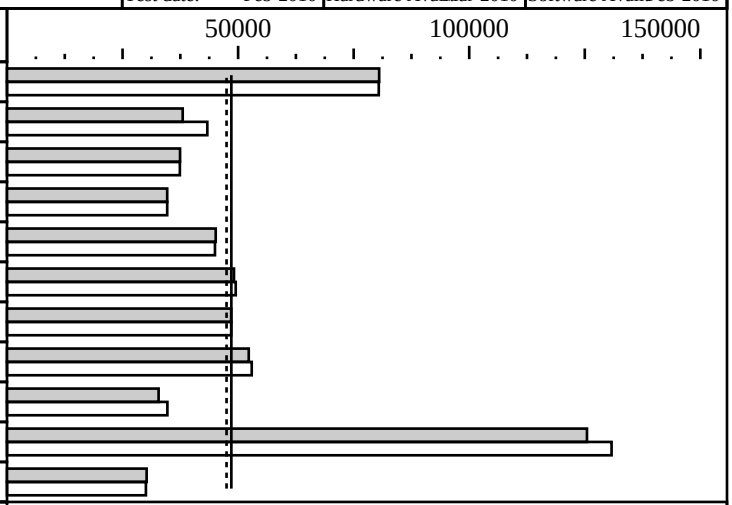

Hardware

CPU:	Intel(R) Xeon(R) Processor X5670
CPU MHz:	2930
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 1 thread/core
CPU(s) orderable:	1,2
Primary Cache:	32KB I + 32KB D on chip per core
Secondary Cache:	256KB I+D on chip per core
L3 Cache:	12MB I+D on chip per chip
Other Cache:	N/A
Memory:	24 GB (RDIMM 6x4-GB 1333 MHz)
Disk Subsystem:	Seagate 500 GB ST300655SS
Other Hardware:	

Software

OpenMP Threads:	12
Parallel:	OpenMP
Operating System:	Red Hat EL 5.4, kernel 2.6.18-164
Compiler:	Intel C/C++ Compiler 11.1.059 for Linux Intel FORTRAN Compiler 11.1.059 for Linux GNU C Compiler 4.1.2 20070115
File System:	Linux ext3
System State:	Default

Notes/Tuning Information

```
================================================================================
BIOS settings notes:
  Intel Hyper-Threading Technology (SMT): Disabled
  Intel Turbo Boost Technology (Turbo)  : Disabled
================================================================================
Portability Flags:
  318.galgel_m: -FI -132
Extra Flags:
  330.art_m: -DINTS_PER_CACHELINE=16 -DDBLS_PER_CACHELINE=8 -D_OPENMP
  331.art_l: -DINTS_PER_CACHELINE=16 -DDBLS_PER_CACHELINE=8 -D_OPENMP
  all: -gcc-name=/usr/bin/gcc
================================================================================
General Notes and Enviroment variables
  export KMP_LIBRARY=turnaround
  export KMP_STACKSIZE=31M
  export KMP_BLOCKTIME=infinite
  export OMP_NUM_THREADS=12
  ONESTEP=yes
  ulimit -s 64000

For compiler/openmp flags description please refer:
Intel-ic11.1-intel64-linux-flags-file-Feb-25-2010.html
Base optimization flags and enviroment variables:
```

Notes/Tuning Information (Continued)

```
================================================================================
Medium:
  OPTIMIZE  = -O3 -xSSE4.2 -ipo1 -openmp
  export KMP_AFFINITY=scatter,0

Peak optimization flags and enviroment variables:
================================================================================
Medium:
  OPTIMIZE  = -O3 -xSSE4.2 -ipo1 -openmp -rcd
  export KMP_AFFINITY=scatter,0

Peak per-benchmark optimization flags and enviroment variables:
================================================================================
312.swim_m
  OPTIMIZE=-O3 -xSSE4.2 -ipo1 -openmp -opt-streaming-stores always -align -rcd
  srcalt = ompl.32

================================================================================
314.mgrid_m
  OPTIMIZE=-O3 -xSSE4.2 -ipo1 -openmp --opt-streaming-stores never -align -rcd

================================================================================
  OPTIMIZE=-O3 -xSSE4.2 -ipo1 -openmp

================================================================================
326.gafort_m
  srcalt = ompl.32

================================================================================
328.fma3d_m
  FOPTIMIZE=-no-prec-sqrt -fp-model fast=2
  srcalt = ompl.32

================================================================================
330.art_m
  COPTIMIZE=-ansi-alias
  export KMP_AFFINITY=scatter,1

================================================================================
332.ammp_m
  OPTIMIZE=-O3 -xSSE4.2 -ipo1 -openmp
  export KMP_AFFINITY=scatter,1
```