



SPEC® OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Huawei

KunLun9016
(288 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECompG_peak2012 = 49.0

SPECompG_base2012 = 48.0

OMP2012 license:27


Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2017

Hardware Availability: Jan-2016

Software Availability: Jul-2015

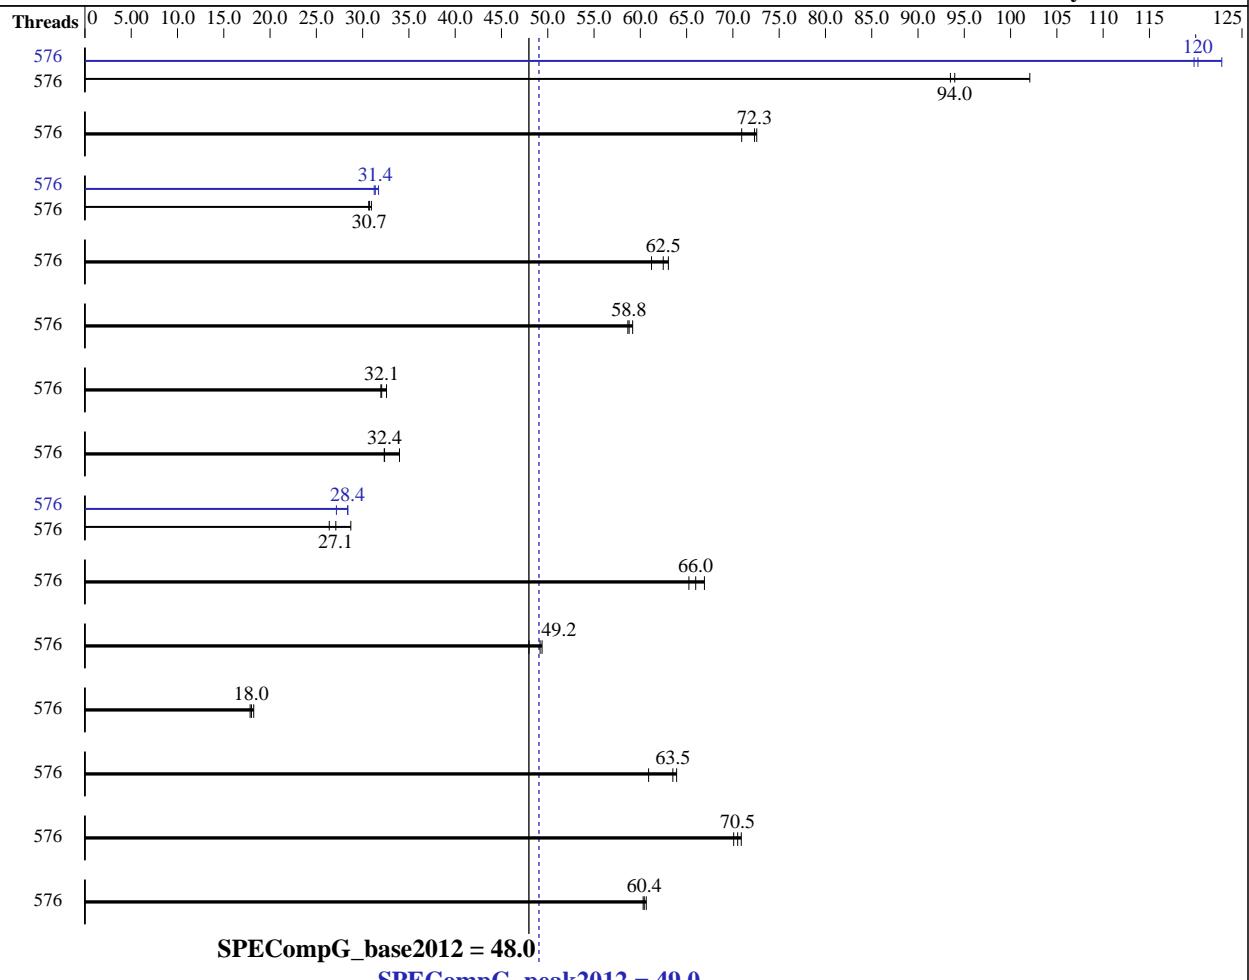

Hardware

CPU Name: Intel Xeon E7-8890 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz: 2500
CPU MHz Maximum: 3300
FPU: Integrated
CPU(s) enabled: 288 cores, 16 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable: 4, 8, 16 Chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 2 TB (128 x 16 GB 2Rx8 PC4-2400T-R, running at 1600 MHz)
Disk Subsystem: 2 x 600 GB SAS, 10K RPM
Other Hardware: None
Base Threads Run: 576

Software

Operating System: Red Hat Enterprise Linux Server release 6.7 (Santiago)
Compiler: Linux rhel67 2.6.32-573.el6.x86_64
C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;
Fortran: Version 16.0.2.181 of Intel Fortran
Auto Parallel: No
File System: ext4
System State: Run level 3
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: None

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Huawei

KunLun9016
(288 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECompG_peak2012 = 49.0

SPECompG_base2012 = 48.0

OMP2012 license:27

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2017

Hardware Availability: Jan-2016

Software Availability: Jul-2015

Minimum Peak Threads: 576
Maximum Peak Threads: 576

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	576	49.3	94.0	49.5	93.5	45.4	102	576	38.5	120	37.7	123	38.6	120
351.bwaves	576	63.8	70.9	62.6	72.3	62.4	72.6	576	63.8	70.9	62.6	72.3	62.4	72.6
352.nab	576	126	30.9	127	30.7	127	30.7	576	124	31.4	124	31.3	123	31.7
357.bt331	576	75.9	62.5	77.4	61.2	75.2	63.0	576	75.9	62.5	77.4	61.2	75.2	63.0
358.botsalgn	576	74.2	58.7	73.5	59.2	74.0	58.8	576	74.2	58.7	73.5	59.2	74.0	58.8
359.botsspar	576	161	32.6	164	32.0	164	32.1	576	161	32.6	164	32.0	164	32.1
360.ilbdc	576	105	34.0	110	32.4	110	32.3	576	105	34.0	110	32.4	110	32.3
362.fma3d	576	132	28.7	140	27.1	144	26.4	576	134	28.4	140	27.2	134	28.4
363.swim	576	69.4	65.2	68.7	66.0	67.7	66.9	576	69.4	65.2	68.7	66.0	67.7	66.9
367.imagick	576	147	48.0	143	49.2	142	49.4	576	147	48.0	143	49.2	142	49.4
370.mgrid331	576	242	18.2	246	18.0	248	17.8	576	242	18.2	246	18.0	248	17.8
371.applu331	576	95.4	63.5	99.5	60.9	94.8	63.9	576	95.4	63.5	99.5	60.9	94.8	63.9
372.smithwa	576	76.5	70.1	75.6	70.9	76.0	70.5	576	76.5	70.1	75.6	70.9	76.0	70.5
376.kdtree	576	74.2	60.6	74.6	60.3	74.5	60.4	576	74.2	60.6	74.6	60.3	74.5	60.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
Sysinfo program /omp2012/Docs/sysinfo
$Rev: 395 $ $Date::: 2012-07-25 #$
running on Kunlun Tue Mar 28 08:41:56 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
  16 "physical id"s (chips)
    576 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 18
  siblings   : 36
  physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 4: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Huawei

KunLun9016
(288 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECompG_peak2012 = 49.0

SPECompG_base2012 = 48.0

OMP2012 license:27

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2017

Hardware Availability: Jan-2016

Software Availability: Jul-2015

Platform Notes (Continued)

```
physical 5: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 6: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 7: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 8: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 9: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 10: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 11: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 12: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 13: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 14: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 15: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

```
From /proc/meminfo
MemTotal: 2116458496 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.7 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.7 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux Kunlun 2.6.32-573.el6.x86_64 #1 SMP Wed Jul 1 18:23:37 EDT 2015 x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 Mar 28 08:28

```
SPEC is set to: /omp2012
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/vg_kunlun-lv_root ext4 50G 21G 27G 44% /
```

```
Additional information from dmidecode:
BIOS American Megatrends Inc. 5.11 02/21/2017
Memory:
128x Micron 36ASF2G72PZ-2G1A2 16 GB 1600 MHz 2 rank
256x NO DIMM NO DIMM
```

(End of data from sysinfo program)

General Notes

```
=====
Power profile set with:
cpupower -c all frequency-set -g performance
```

```
System settings notes:
Intel Turbo Boost Technology (Turbo) : Enabled
Memory RAS Configuration set to Maximum Performance
Continued on next page
```



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Huawei

KunLun9016
(288 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECompG_peak2012 = 49.0

SPECompG_base2012 = 48.0

OMP2012 license:27

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2017

Hardware Availability: Jan-2016

Software Availability: Jul-2015

General Notes (Continued)

=====

General Notes and Environment variables

```
ENV_KMP_AFFINITY=compact,1
ENV_KMP_BLOCKTIME=infinite
ENV_KMP_DETERMINISTIC_REDUCTION=1
ENV_OMP_DYNAMIC=FALSE
ENV_KMP_LIBRARY=turnaround
ENV_KMP_SCHEDULE=static,balanced
ENV_KMP_STACKSIZE=256M
ENV_OMP_NESTED=FALSE
ENV_OMP_NUM_THREADS=576
```

=====

General base OMP Library Settings

```
ENV_KMP_AFFINITY=compact,1
```

=====

General peak OMP Library Settings

```
ENV_KMP_AFFINITY=compact,1
```

=====

Per benchmark peak OMP Library Settings

=====

351.bwaves:peak:

```
ENV_KMP_AFFINITY=compact,1
ENV_OMP_SCHEDULE=static,1
```

=====

357.bt331:peak:

```
ENV_OMP_SCHEDULE=static,1
```

=====

359.botsspar:peak:

```
ENV_KMP_AFFINITY=compact,1
ENV_OMP_SCHEDULE=guided
```

=====

363.swim:peak:

```
ENV_KMP_AFFINITY=compact,1
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Huawei

KunLun9016
(288 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECompG_peak2012 = 49.0

SPECompG_base2012 = 48.0

OMP2012 license:27

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2017

Hardware Availability: Jan-2016

Software Availability: Jul-2015

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Base Portability Flags

350.md: -FR
357.bt331: -mcmodel=medium
363.swim: -mcmodel=medium
367.imagick: -std=c99

Base Optimization Flags

C benchmarks:
-O2 -openmp -ipo -xCORE-AVX2 -shared-intel -ansi-alias

C++ benchmarks:
-O2 -openmp -ipo -xCORE-AVX2 -shared-intel -ansi-alias

Fortran benchmarks:
-O2 -openmp -ipo -xCORE-AVX2 -shared-intel -align array64byte

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Peak Portability Flags

350.md: -FR
357.bt331: -mcmodel=medium
363.swim: -mcmodel=medium
367.imagick: -std=c99



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Huawei

KunLun9016
(288 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECompG_peak2012 = 49.0

SPECompG_base2012 = 48.0

OMP2012 license:27

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2017

Hardware Availability: Jan-2016

Software Availability: Jul-2015

Peak Optimization Flags

C benchmarks:

```
352.nab: -O3 -openmp -ipo -xCORE-AVX2 -fno-alias  
          -opt-malloc-options=1 -opt-calloc -fp-model fast=2  
          -no-prec-div -no-prec-sqrt -ansi-alias
```

358.botsalgn: basepeak = yes

359.botsspar: basepeak = yes

367.imagick: basepeak = yes

372.smithwa: basepeak = yes

C++ benchmarks:

376.kdtree: basepeak = yes

Fortran benchmarks:

```
350.md: -O3 -openmp -ipo -xCORE-AVX2 -fno-alias  
          -opt-malloc-options=1 -fp-model fast=2 -no-prec-div  
          -no-prec-sqrt -align array64byte
```

351.bwaves: basepeak = yes

357.bt331: basepeak = yes

360.ilbdc: basepeak = yes

```
362.fma3d: -O3 -openmp -ipo -xCORE-AVX2 -fno-alias  
          -align array64byte
```

363.swim: basepeak = yes

370.mgrid331: basepeak = yes

371.applu331: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/Intel-ic13.0-linux64.20140219.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/omp2012/flags/Intel-ic13.0-linux64.20140219.xml>



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Huawei

KunLun9016
(288 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECompG_peak2012 = 49.0

SPECompG_base2012 = 48.0

OMP2012 license:27

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2017

Hardware Availability: Jan-2016

Software Availability: Jul-2015

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.0.

Report generated on Wed Apr 12 11:13:59 2017 by SPEC OMP2012 PS/PDF formatter v541.
Originally published on 12 April 2017.