CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel VC820 (1.0B GHz, Pentium III processor)

SPECfp2000 = 318

SPECfp_base2000 = 304

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Nov-2000 | Hardware Avail: Mar-2000 | Software Avail: Nov-2000

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	407	393	404	396
171.swim	3100	763	406	766	405
172.mgrid	1800	733	246	654	275
173.applu	2100	861	244	849	247
177.mesa	1400	262	535	264	529
178.galgel	2900	985	295	908	319
179.art	2600	687	379	656	396
183.equake	1300	558	233	455	286
187.facerec	1900	641	296	571	333
188.ammp	2200	778	283	759	290
189.lucas	2000	641	312	644	311
191.fma3d	2100	744	282	744	282
200.sixtrack	1100	652	169	635	173
301.apsi	2600	755	345	725	359

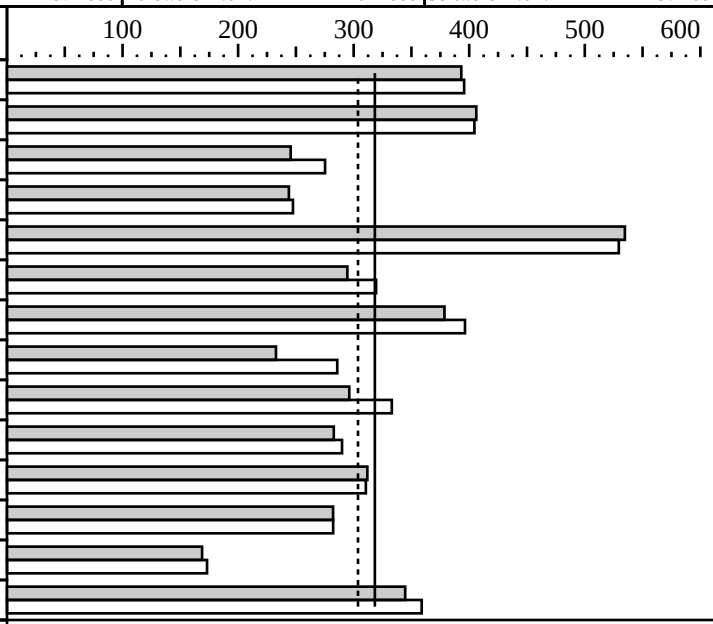

Hardware

CPU:	Pentium III processor (1.0B GHz, 133 MHz bus)
CPU MHz:	1000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	16KBI + 16KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 MB (2 128 MB PC800 RDRAM non-ECC modules)
Disk Subsystem:	IBM DTLA-307030 ATA-100
Other Hardware:	Creative Labs Annihalator 2

Software

Operating System:	Windows 2000(Build 2195)
Compiler:	Intel C/C++ Compiler 5.0, Intel FORTRAN Compiler 5.0, Microsoft Visual C++ 6.0 (for libraries), Other software: Microquill SmartHeap V5.0
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning: -QxK -Qipo -O3 +FDO
Portability:
178.galgel: -FI /F32000000
Peak tuning:
168.wupwise:    -Qipo -QxK  -O3 +FDO
171.swim:       -Qipo -QxK  -O3 +FDO
172.mgrid:      -Qipo -QaxK -O3 +FDO
173.applu:      -Qipo -QxK  -O3 +FDO
177.mesa:       -Qipo -QxK  -O3 -Oa +FDO shlW32M.lib
178.galgel:     -Qipo -QxK  -O3 +FDO shlW32M.lib
179.art:        -Qipo -QxK  -O3 -Oa +FDO shlW32M.lib
183.equake:     -Qipo -QxK  -Qrcd -Oa +FDO shlW32M.lib
187.facerec:    -Qipo -QxK  -O3 +FDO shlW32M.lib
188.ammp:       -Qipo -QxK  -O3 -Oa +FDO
189.lucas:      -Qipo -QxK  -O3 +FDO shlW32M.lib
191.fma3d:      -Qipo -QxK  -O3 +FDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
200.sixtrack:   -Qipo -QxK  +FDO
301.apsi:       -Qipo -QxK  +FDO
Library ordering for 178.galgel, 187.facerec and 189.lucus (include
SmartHeap correctly with default libs): LIBS=libIEPCF90.lib libintrins.lib
libF90.lib libqwind.lib libm.lib shlW32M.lib LIBC.lib libirc.lib OLDNAMES.lib
shlW32M.lib is the SmartHeap library V5.0 from Microquill: http://www.microquill.com
Tested systems can be used with Shin-G ATX case,Sparkle Inc.,
power supply. Product description located as of 03/2000:
http://developer.intel.com/design/motherbd/vc/vc_ds.htm
Motherboard is available through Intel OEM Distribution Channel. See
http://channel.intel.com/ for more information
The system bus runs at 133 MHz
```