CFP2000 Result

Sun Microsystems
Sun Fire E6900 (16 processor)

SPECfp_rate2000 = 195
SPECfp_rate_base2000 = 160

SPEC license #: 6	Tested by: Sun Microsystems	Test date: Apr-2004	Hardware Avail: May-2004	Software Avail: Apr-2004

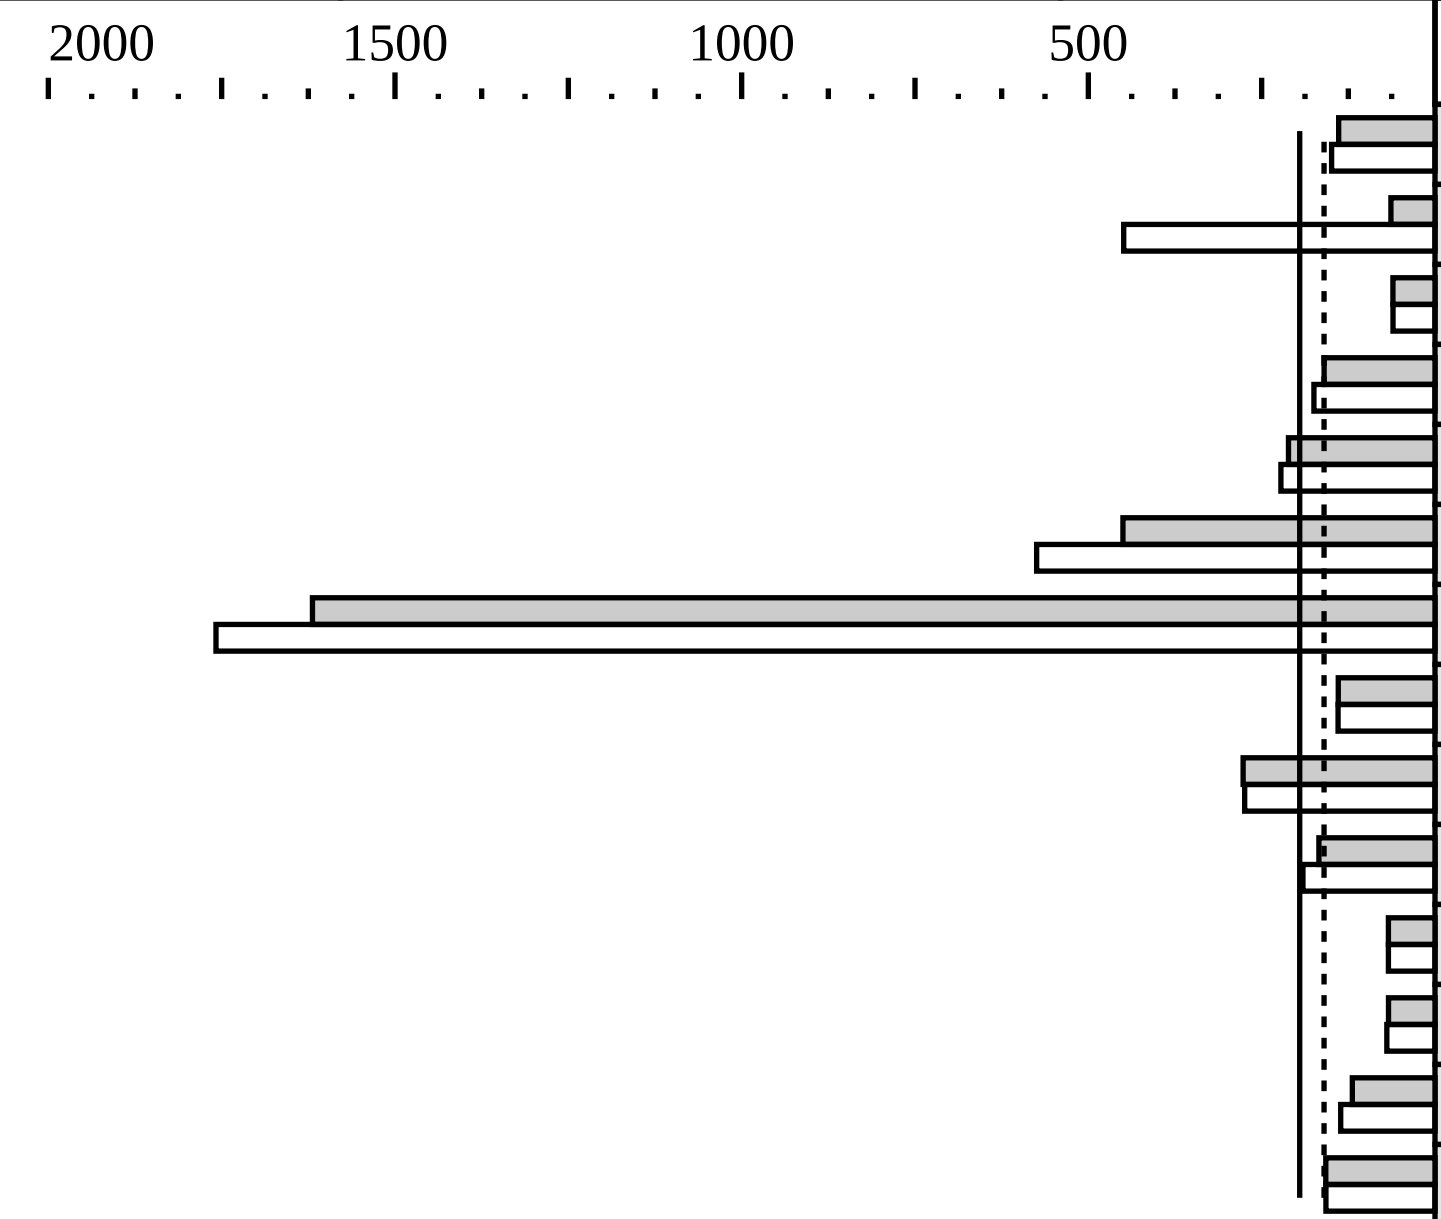

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	32	427	139	32	398	149
171.swim	32	1810	63.6	32	256	449
172.mgrid	32	1101	60.7	32	1103	60.6
173.applu	32	487	160	32	446	175
177.mesa	32	246	211	32	234	222
178.galgel	32	239	450	32	187	575
179.art	32	59.6	1619	32	54.9	1758
183.equake	32	346	140	32	345	140
187.facerec	32	255	277	32	257	274
188.ammp	32	488	167	32	429	190
189.lucas	32	1105	67.2	32	1105	67.2
191.fma3d	32	1162	67.1	32	1122	69.5
200.sixtrack	32	342	119	32	300	136
301.apsi	32	613	158	32	614	157

Hardware

CPU:	UltraSPARC s400
CPU MHz:	1050
FPU:	Integrated
CPU(s) enabled:	32 cores, 16 chips, 2 cores/chip
CPU(s) orderable:	4, 8, 12, 16, 20, 24 (order by # chips)
Parallel:	No
Primary Cache:	32KBI+64KBD per core on chip (64KBI+128KBD on chip)
Secondary Cache:	8MB(I+D) per core off chip (16MB(I+D) off chip)
L3 Cache:	None
Other Cache:	None
Memory:	64GB 16-way interleaved
Disk Subsystem:	Sun StorEdge S1 Disk Array (2x36GB) Sun StorEdge T3 Array for the Workgroup (9x36GB)
Other Hardware:	None

Software

Operating System:	Solaris 9 04/04
Compiler:	Sun ONE Studio 8 Sun Performance Library 8
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC
  F90: f90
  F77: f90

Floating point base flags:
    C:  -fast -xipo=2 -xalias_level=std with ONESTEP=yes and feedback
  F90:  -fast -xipo=2 with ONESTEP=yes and feedback

Floating point peak flags:
  ONESTEP=yes and feedback for all benchmarks, unless otherwise noted

  168.wupwise: -fast -xipo=2 -Qoption iropt -Ainline:inc=800:cp=1
```

CFP2000 Result

Sun Microsystems
Sun Fire E6900 (16 processor)

SPECfp_rate2000 = 195
SPECfp_rate_base2000 = 160

SPEC license #: 6	Tested by: Sun Microsystems	Test date: Apr-2004	Hardware Avail: May-2004	Software Avail: Apr-2004

Notes/Tuning Information (Continued)

```
  171.swim:    -fast -xpad=common:3969 -xpagesize=64K -xprefetch=latx:1.6
               -Qoption iropt -Atile:skewp,-Ainline:cs=700
               (no feedback)
  172.mgrid:   -fast -xipo=2
  173.applu:   -fast -xipo=2
               -Qoption cg -Qlp=1-av=192-fa=1,-Qms_pipe+prefolim=7
               -Qoption iropt -Aujam:inner=g
  177.mesa:    -fast -xipo=2 -xalias_level=strong -xrestrict
               -Wc,-Qms_pipe+unoovf
  178.galgel:  -fast -xipo=2 -Qoption iropt -Addint:sf=9 -xlic_lib=sunperf
               RM_SOURCES=lapak.f90
  179.art:     -fast -xipo=2 -xalias_level=std
               -Wc,-Qms_pipe-prefst,-Qms_pipe+prefolim=11
  183.equake:  -fast -xipo=2 -xalias_level=strong -xprefetch_level=2
  187.facerec: -fast -xipo=2
  188.ammp:    -fast -xipo=2 -xalias_level=std -xpagesize=512K -lmopt -lm
  189.lucas:   basepeak=yes
  191.fma3d:   -fast -xipo=2 -stackvar -xprefetch_level=3
               -Qoption iropt -Apf:pdl=1
  200.sixtrack:-O -dalign -xchip=ultra3 -xarch=v8plusb -fsimple=2
  301.apsi:    -fast -xipo=2

Feedback is done as follows, unless otherwise noted:
  fdo_pre0:    rm -rf ./feedback.profile ./SunWS_cache
  PASS1:       -xprofile=collect:./feedback
  PASS2:       -xprofile=use:./feedback

Portability:
  178.galgel:  -e -fixed

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

Processes were bound to CPUs using submit=pbind

The system was configured with multiple file systems.
The O/S was installed on one disk of the Sun StorEdge S1
Disk Array (ufs, ufs w/logging).  The benchmark was run on
the Sun StorEdge T3 Array, using H/W Raid 5 and ufs with
ufs logging file system.
```