CFP2000 Result

Sun Microsystems
Sun Fire E4900 (12 processor)

SPECfp_rate2000 = 167
SPECfp_rate_base2000 = 138

SPEC license #: 6	Tested by: Sun Microsystems	Test date: Apr-2004	Hardware Avail: May-2004	Software Avail: Apr-2004

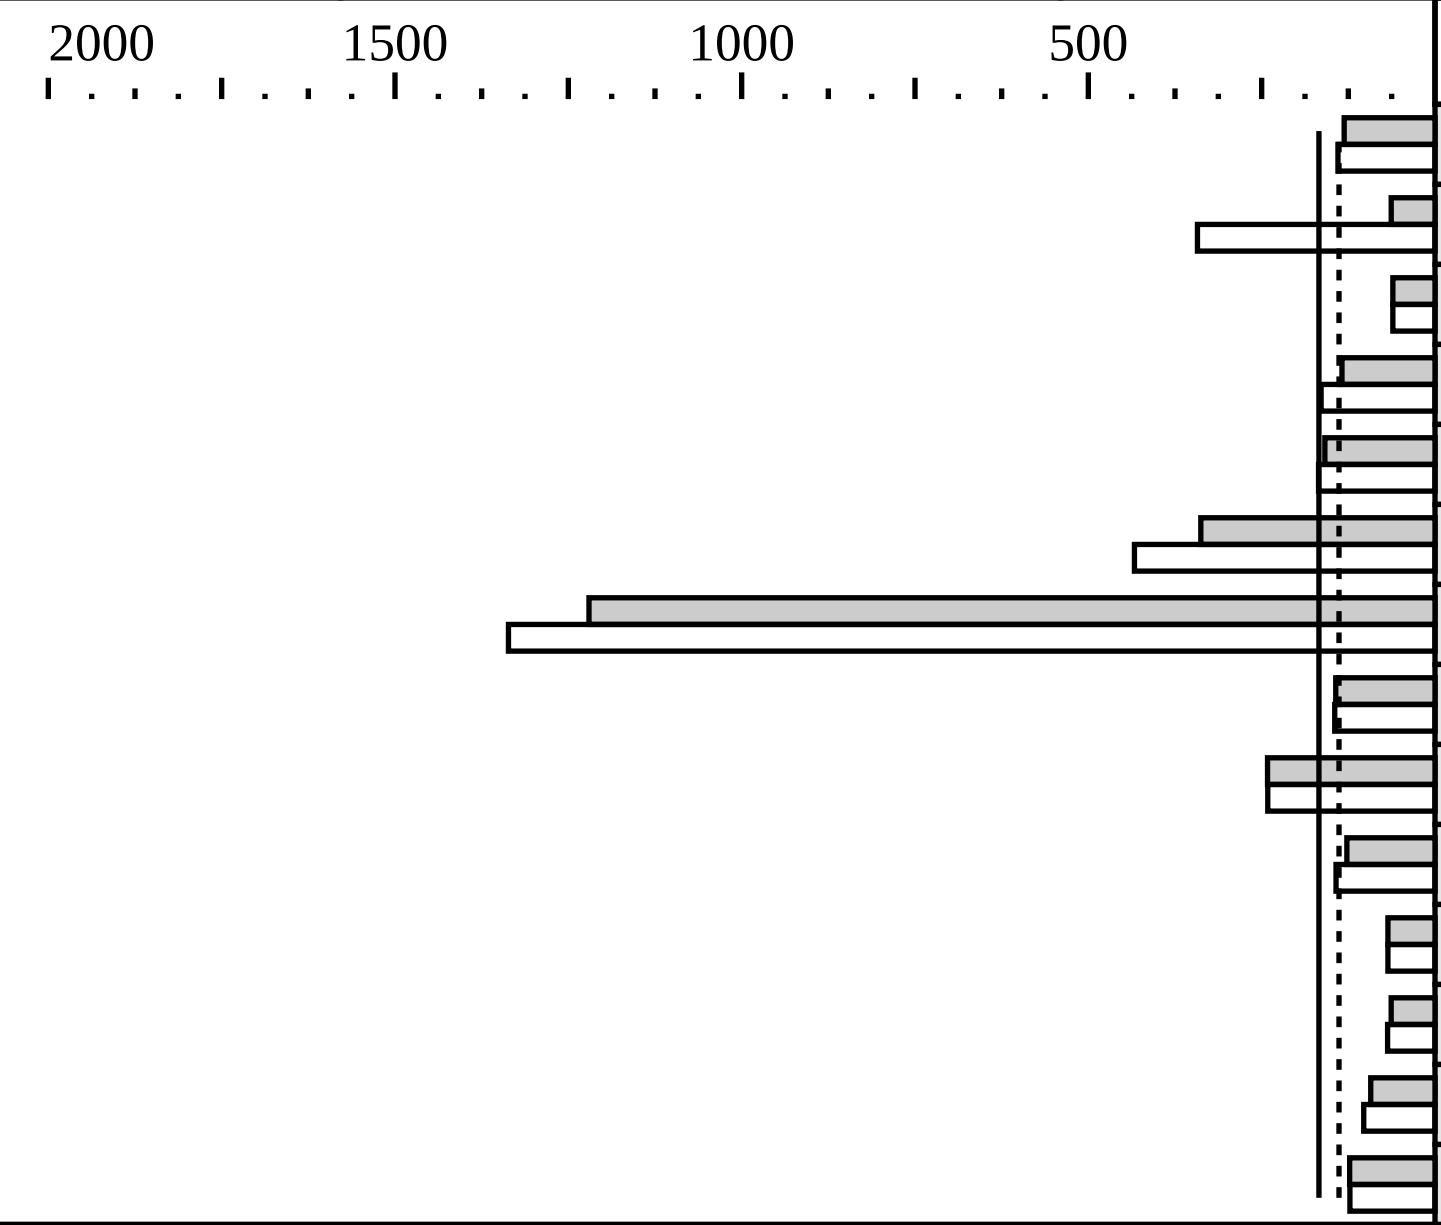

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	24	340	131	24	318	140
171.swim	24	1367	63.1	24	252	343
172.mgrid	24	824	60.8	24	824	60.8
173.applu	24	436	134	24	356	164
177.mesa	24	245	159	24	232	168
178.galgel	24	239	338	24	186	433
179.art	24	59.3	1220	24	54.2	1336
183.equake	24	253	143	24	250	145
187.facerec	24	219	242	24	219	241
188.ammp	24	482	127	24	429	143
189.lucas	24	820	67.9	24	820	67.9
191.fma3d	24	925	63.2	24	855	68.4
200.sixtrack	24	330	92.7	24	298	103
301.apsi	24	588	123	24	590	123

Hardware

CPU:	UltraSPARC s400
CPU MHz:	1050
FPU:	Integrated
CPU(s) enabled:	24 cores, 12 chips, 2 cores/chip
CPU(s) orderable:	4, 8, 12 (order by # chips)
Parallel:	No
Primary Cache:	32KBI+64KBD per core on chip (64KBI+128KBD on chip)
Secondary Cache:	8MB(I+D) per core off chip (16MB(I+D) off chip)
L3 Cache:	None
Other Cache:	None
Memory:	48GB 16-way interleaved
Disk Subsystem:	Sun StorEdge S1 Disk Array (2x36GB) Sun StorEdge T3 Array for the Workgroup (9x36GB)
Other Hardware:	None

Software

Operating System:	Solaris 9 04/04
Compiler:	Sun ONE Studio 8 Sun Performance Library 8
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC
  F90: f90
  F77: f90

Floating point base flags:
    C:  -fast -xipo=2 -xalias_level=std with ONESTEP=yes and feedback
  F90:  -fast -xipo=2 with ONESTEP=yes and feedback

Floating point peak flags:
  ONESTEP=yes and feedback for all benchmarks, unless otherwise noted

  168.wupwise: -fast -xipo=2 -Qoption iropt -Ainline:inc=800:cp=1
```

Sun Microsystems
Sun Fire E4900 (12 processor)

SPECfp_rate2000 = 167
SPECfp_rate_base2000 = 138

SPEC license #: 6	Tested by: Sun Microsystems	Test date: Apr-2004	Hardware Avail: May-2004	Software Avail: Apr-2004

Notes/Tuning Information (Continued)

```
  171.swim:    -fast -xpad=common:3969 -xpagesize=64K -xprefetch=latx:1.6
               -Qoption iropt -Atile:skewp,-Ainline:cs=700
               (no feedback)
  172.mgrid:   -fast -xipo=2
  173.applu:   -fast -xipo=2
               -Qoption cg -Qlp=1-av=192-fa=1,-Qms_pipe+prefolim=7
               -Qoption iropt -Aujam:inner=g
  177.mesa:    -fast -xipo=2 -xalias_level=strong -xrestrict
               -Wc,-Qms_pipe+unoovf
  178.galgel:  -fast -xipo=2 -Qoption iropt -Addint:sf=9 -xlic_lib=sunperf
               RM_SOURCES=lapak.f90
  179.art:     -fast -xipo=2 -xalias_level=std
               -Wc,-Qms_pipe-prefst,-Qms_pipe+prefolim=11
  183.equake:  -fast -xipo=2 -xalias_level=strong -xprefetch_level=2
  187.facerec: -fast -xipo=2
  188.ammp:    -fast -xipo=2 -xalias_level=std -xpagesize=512K -lmopt -lm
  189.lucas:   basepeak=yes
  191.fma3d:   -fast -xipo=2 -stackvar -xprefetch_level=3
               -Qoption iropt -Apf:pdl=1
  200.sixtrack:-O -dalign -xchip=ultra3 -xarch=v8plusb -fsimple=2
  301.apsi:    -fast -xipo=2

Feedback is done as follows, unless otherwise noted:
  fdo_pre0:    rm -rf ./feedback.profile ./SunWS_cache
  PASS1:       -xprofile=collect:./feedback
  PASS2:       -xprofile=use:./feedback

Portability:
  178.galgel:  -e -fixed

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

Processes were bound to CPUs using submit=pbind

The system was configured with multiple file systems.
The O/S was installed on one disk of the Sun StorEdge S1
Disk Array (ufs, ufs w/logging).  The benchmark was run on
the Sun StorEdge T3 Array, using H/W Raid 5 and ufs with
ufs logging file system.
```