



# CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation


## IBM Corporation

IBM System X 3250 (2.4 GHz Xeon 3060, 4MB L2 Cache)

SPECint\_rate2000 = --

SPECint\_rate\_base2000 = 53.7

SPEC license #: 11 | Tested by: IBM Corporation | Test date: Oct-2006 | Hardware Avail: Nov-2006 | Software Avail: Mar-2006

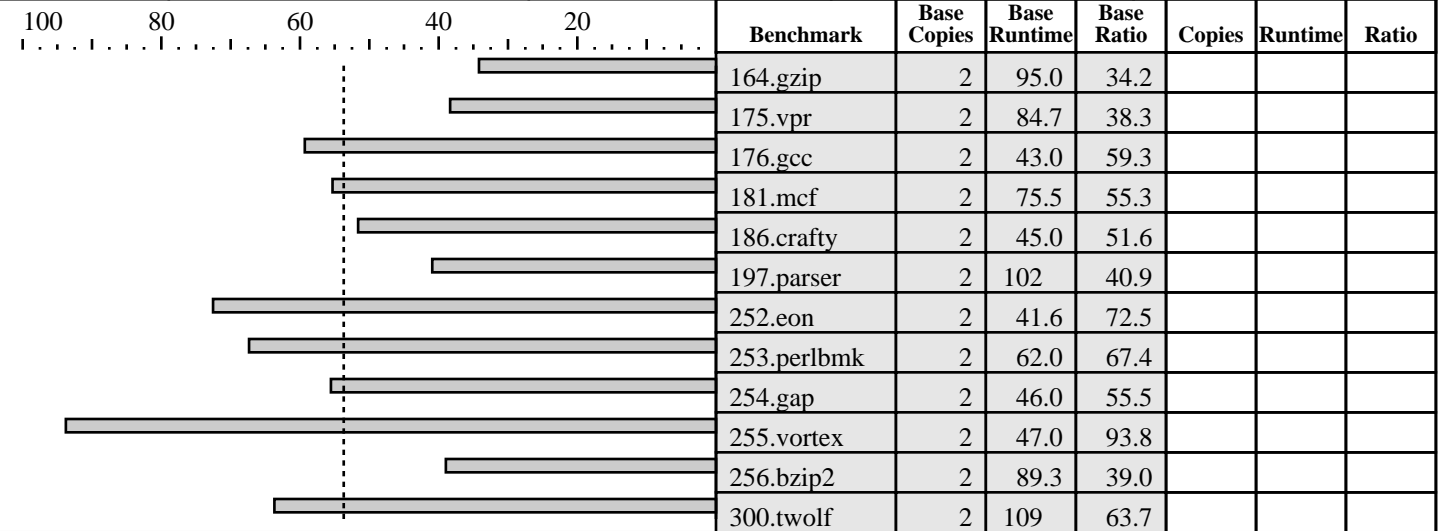

### Hardware

CPU: Intel Xeon processor 3060 ( 2.4 GHz, 1066 MHz bus)  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Parallel: No  
 Primary Cache: 32KB(I) + 32KB(D) on chip (per core)  
 Secondary Cache: 4096KB(I+D) on chip (per chip)  
 L3 Cache: N/A  
 Other Cache: N/A  
 Memory: 4 x 1024 MB ECC PC2-5300  
 Disk Subsystem: 73GB SAS 15K RPM  
 Other Hardware:

### Software

Operating System: Windows Server 2003 Enterprise Edition (32-bit)  
 Compiler: Intel C++ 9.1 for 32-bit applications  
 Build 20060323Z  
 Microsoft Visual Studio 2005(for libraries)  
 SmartHeap Library Version 8.0 from <http://www.microquill.com/>  
 File System: NTFS  
 System State: Default

## Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen PASS2=-Qprof_use
Base tuning for C programs: -fast +FDO shlw32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO shlw32M.lib
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafty: -DNT_i386
252.eon: -DHAS_ERRLIST
253.perlbnk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
```