SPEC® CINT2006 Result

Hewlett-Packard Company

HP Integrity rx3600 (1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint®_rate2006 = 53.6

SPECint_rate_base2006 = 49.5

CPU2006 license: 03
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Sep-2006
Hardware Availability: Nov-2006
Software Availability: Sep-2006

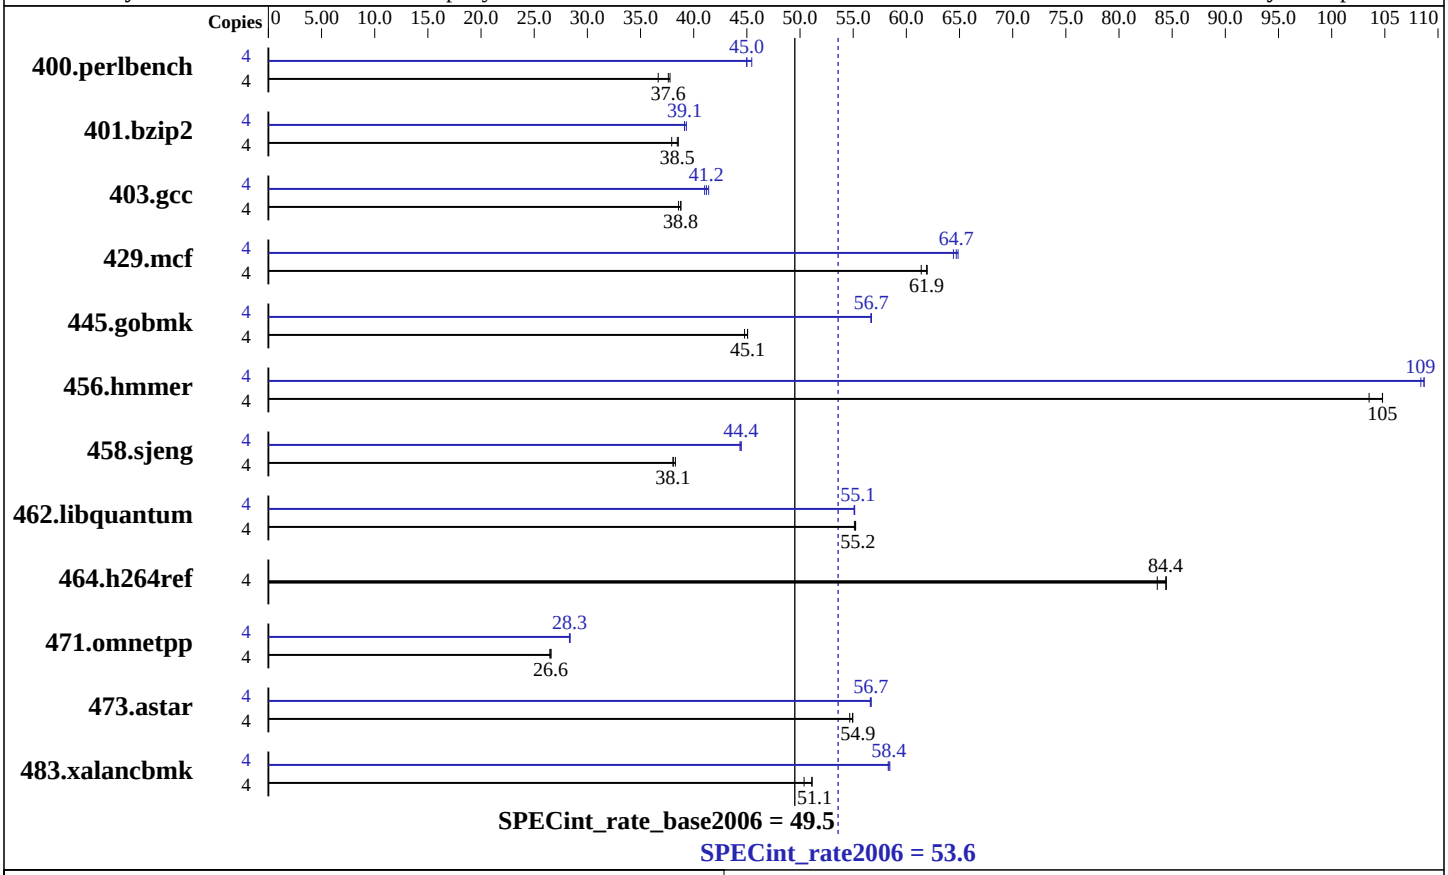

Hardware

CPU Name:	Dual-Core Intel Itanium 2 9040
CPU Characteristics:	1.6GHz/18MB, 533MHz FSB
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1-2 chips
Primary Cache:	16 KB I + 16 KB D on chip per core
Secondary Cache:	1 MB I + 256 KB D on chip per core
L3 Cache:	9 MB I+D on chip per core
Other Cache:	None
Memory:	16 GB (8x2GB DIMMs, AD124A 8-DIMM memory carrier)
Disk Subsystem:	73GB 10K RPM SAS
Other Hardware:	None

Software

Operating System:	HPUX11i-TCOE B.11.23.0609
Compiler:	HP C/aC++ Developer's Bundle C.11.23.12
Auto Parallel:	No
File System:	vxfs
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill Smartheap 8.0

SPEC CINT2006 Result

Hewlett-Packard Company

HP Integrity rx3600 (1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint_rate2006 = 53.6

SPECint_rate_base2006 = 49.5

CPU2006 license: 03
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Sep-2006
Hardware Availability: Nov-2006
Software Availability: Sep-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	1066	36.7	**1039**	**37.6**	1035	37.8	4	869	45.0	**869**	**45.0**	860	45.5
401.bzip2	4	1018	37.9	**1004**	**38.5**	1001	38.6	4	**986**	**39.1**	986	39.1	982	39.3
403.gcc	4	835	38.6	**830**	**38.8**	830	38.8	4	785	41.0	778	41.4	**782**	**41.2**
429.mcf	4	589	62.0	594	61.4	**589**	**61.9**	4	**564**	**64.7**	566	64.4	562	64.9
445.gobmk	4	937	44.8	931	45.1	**931**	**45.1**	4	740	56.7	740	56.7	**740**	**56.7**
456.hmmer	4	361	104	356	105	**356**	**105**	4	**343**	**109**	344	108	343	109
458.sjeng	4	1264	38.3	1272	38.1	**1271**	**38.1**	4	1091	44.4	1088	44.5	**1089**	**44.4**
462.libquantum	4	1504	55.1	**1501**	**55.2**	1501	55.2	4	1504	55.1	**1504**	**55.1**	1503	55.1
464.h264ref	4	1059	83.6	**1049**	**84.4**	1048	84.5	4	1059	83.6	**1049**	**84.4**	1048	84.5
471.omnetpp	4	944	26.5	**941**	**26.6**	941	26.6	4	**883**	**28.3**	881	28.4	883	28.3
473.astar	4	514	54.7	511	55.0	**511**	**54.9**	4	496	56.6	495	56.7	**496**	**56.7**
483.xalancbmk	4	548	50.4	540	51.1	**540**	**51.1**	4	**473**	**58.4**	473	58.3	472	58.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
The system had the September 2006 HP-UX 11i v2 Technical Computing
Operating Environment (TCOE) and compilers installed, along with
the following patches:

PHSS_34858  linker + fdp cumulative patch
PHSS_34853  Math Library Cumulative Patch
PHSS_34854  Integrity Unwind Library
PHSS_34855  HP C Compiler (A.06.12)
PHSS_34856  aC++ Compiler (A.06.12)
PHSS_34857  u2comp/be/plugin library patch
PHSS_34395  FORTRAN I/O Library [libIO77]
PHSS_34397  FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399  Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020  Perfmon enhancements and Itanium Dual-Core

The following kernel tunables were set, in addition to the defaults
set by the Technical Computing OE:

dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608
```

Base Compiler Invocation

C benchmarks:
```
/opt/ansic/bin/cc -Ae
```

C++ benchmarks:
```
/opt/aCC/bin/aCC -Aa
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Base Optimization Flags

C benchmarks:
```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
```

C++ benchmarks:
```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a
```

Peak Compiler Invocation

C benchmarks:
```
/opt/ansic/bin/cc -Ae
```

C++ benchmarks:
```
/opt/aCC/bin/aCC -Aa
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Peak Optimization Flags

C benchmarks:

400.perlbench: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: Same as 400.perlbench

445.gobmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct

456.hmmer: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M

458.sjeng: Same as 445.gobmk

462.libquantum: Same as 456.hmmer

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M /usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

473.astar: +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap /usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

483.xalancbmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap /usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.08.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.08.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:05:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 October 2006.