



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer Altos R520 (Intel Xeon X5355, 2.66GHz)

**SPECfp®\_rate2006 = 57.2**

**SPECfp\_rate\_base2006 = 56.3**

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Feb-2007

Hardware Availability: Nov-2006

Software Availability: Nov-2006

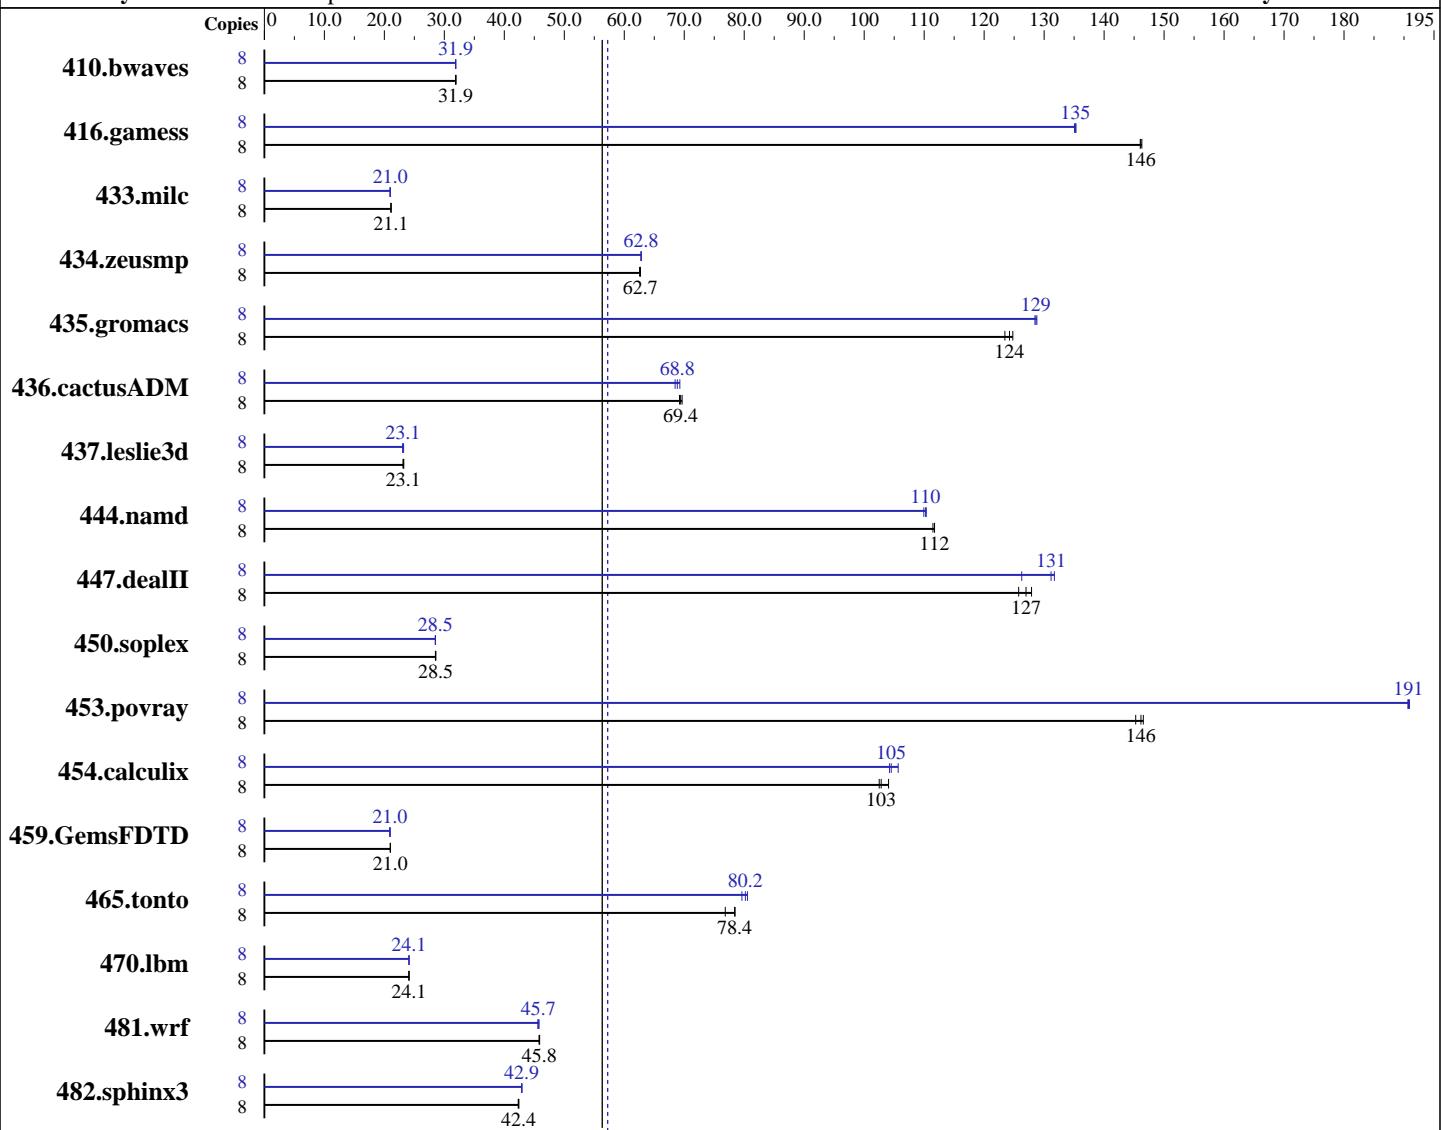

### Hardware

CPU Name: Intel Xeon X5355  
CPU Characteristics: 1333MHz system bus  
CPU MHz: 2666  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

### Software

Operating System: SUSE Linux Enterprise Server 10 EM64T (Kernel 2.6.16.21-0.8-smp)  
Compiler: Intel C++ Compiler 9.1 for Intel EM64T-based Package ID l\_cc\_c\_9.1.042 Build no 20060707  
Intel Fortran Compiler for Intel EM64T-based applications, Version 9.1 Package ID l\_fc\_c\_9.1.040 Build no 20061101  
Auto Parallel: No  
File System: ext2

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer Altos R520 (Intel Xeon X5355, 2.66GHz)

**SPECfp\_rate2006 = 57.2**

**SPECfp\_rate\_base2006 = 56.3**

**CPU2006 license:** 97

**Test date:** Feb-2007

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Nov-2006

**Tested by:** Acer Incorporated

**Software Availability:** Nov-2006

L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8 x 2048MB ECC FB-DIMM DDR2-667 CL5-5-5)  
 Disk Subsystem: 1 x 73GB 10000RPM SAS HDD  
 Other Hardware: None

System State: Default  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: --

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3411	31.9	<b>3407</b>	<b>31.9</b>	3403	31.9	8	3408	31.9	<b>3408</b>	<b>31.9</b>	3408	31.9
416.gamess	8	1071	146	<b>1072</b>	<b>146</b>	1073	146	8	<b>1158</b>	<b>135</b>	1158	135	1160	135
433.milc	8	3482	21.1	3477	21.1	<b>3478</b>	<b>21.1</b>	8	3505	21.0	<b>3500</b>	<b>21.0</b>	3499	21.0
434.zeusmp	8	1164	62.5	<b>1161</b>	<b>62.7</b>	1161	62.7	8	1158	62.9	<b>1159</b>	<b>62.8</b>	1160	62.8
435.gromacs	8	<b>460</b>	<b>124</b>	458	125	463	123	8	444	129	445	128	<b>444</b>	<b>129</b>
436.cactusADM	8	<b>1378</b>	<b>69.4</b>	1381	69.2	1373	69.6	8	1380	69.3	<b>1389</b>	<b>68.8</b>	1396	68.5
437.leslie3d	8	3235	23.2	3251	23.1	<b>3249</b>	<b>23.1</b>	8	3261	23.1	<b>3254</b>	<b>23.1</b>	3240	23.2
444.namd	8	576	111	<b>574</b>	<b>112</b>	574	112	8	581	110	584	110	<b>582</b>	<b>110</b>
447.dealII	8	728	126	<b>721</b>	<b>127</b>	716	128	8	725	126	<b>698</b>	<b>131</b>	695	132
450.soplex	8	<b>2338</b>	<b>28.5</b>	2334	28.6	2340	28.5	8	2339	28.5	2341	28.5	<b>2340</b>	<b>28.5</b>
453.povray	8	290	147	<b>291</b>	<b>146</b>	293	145	8	<b>223</b>	<b>191</b>	223	191	223	191
454.calculix	8	<b>642</b>	<b>103</b>	644	103	634	104	8	625	106	<b>632</b>	<b>105</b>	633	104
459.GemsFDTD	8	4048	21.0	4037	21.0	<b>4038</b>	<b>21.0</b>	8	4064	20.9	4049	21.0	<b>4050</b>	<b>21.0</b>
465.tonto	8	1003	78.5	1024	76.8	<b>1004</b>	<b>78.4</b>	8	989	79.6	977	80.5	<b>982</b>	<b>80.2</b>
470.lbm	8	<b>4559</b>	<b>24.1</b>	4562	24.1	4558	24.1	8	<b>4558</b>	<b>24.1</b>	4558	24.1	4559	24.1
481.wrf	8	1950	45.8	1947	45.9	<b>1950</b>	<b>45.8</b>	8	<b>1957</b>	<b>45.7</b>	1960	45.6	1951	45.8
482.sphinx3	8	3684	42.3	<b>3678</b>	<b>42.4</b>	3676	42.4	8	<b>3631</b>	<b>42.9</b>	<b>3635</b>	<b>42.9</b>	3635	42.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## General Notes

This result was measured on the Acer Altos R520.  
 The Altos R720 and Altos R520 are electronically equivalent.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 57.2**

Acer Altos R520 (Intel Xeon X5355, 2.66GHz)

**SPECfp\_rate\_base2006 = 56.3**

CPU2006 license: 97

Test date: Feb-2007

Test sponsor: Acer Incorporated

Hardware Availability: Nov-2006

Tested by: Acer Incorporated

Software Availability: Nov-2006

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:  
-fast

C++ benchmarks:  
-fast

Fortran benchmarks:  
-fast

Benchmarks using both Fortran and C:  
-fast



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 57.2**

Acer Altos R520 (Intel Xeon X5355, 2.66GHz)

**SPECfp\_rate\_base2006 = 56.3**

CPU2006 license: 97

Test date: Feb-2007

Test sponsor: Acer Incorporated

Hardware Availability: Nov-2006

Tested by: Acer Incorporated

Software Availability: Nov-2006

## Peak Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

-prof\_gen(pass 1) -prof\_use(pass 2) -fast -auto\_ilp32

C++ benchmarks:

-prof\_gen(pass 1) -prof\_use(pass 2) -fast -auto\_ilp32

Fortran benchmarks:

-prof\_gen(pass 1) -prof\_use(pass 2) -fast -auto\_ilp32

Benchmarks using both Fortran and C:

-prof\_gen(pass 1) -prof\_use(pass 2) -fast -auto\_ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Acer-CPU2006-ic91-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Acer-CPU2006-ic91-flags.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 57.2**

Acer Altos R520 (Intel Xeon X5355, 2.66GHz)

**SPECfp\_rate\_base2006 = 56.3**

**CPU2006 license:** 97

**Test date:** Feb-2007

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Nov-2006

**Tested by:** Acer Incorporated

**Software Availability:** Nov-2006

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 10:53:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 March 2007.