



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c
(1.86 GHz, Intel Xeon processor E5320)

SPECint_rate2006 = 34.5

SPECint_rate_base2006 = 33.3

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Feb-2007

Hardware Availability: Jan-2007

Software Availability: Nov-2006

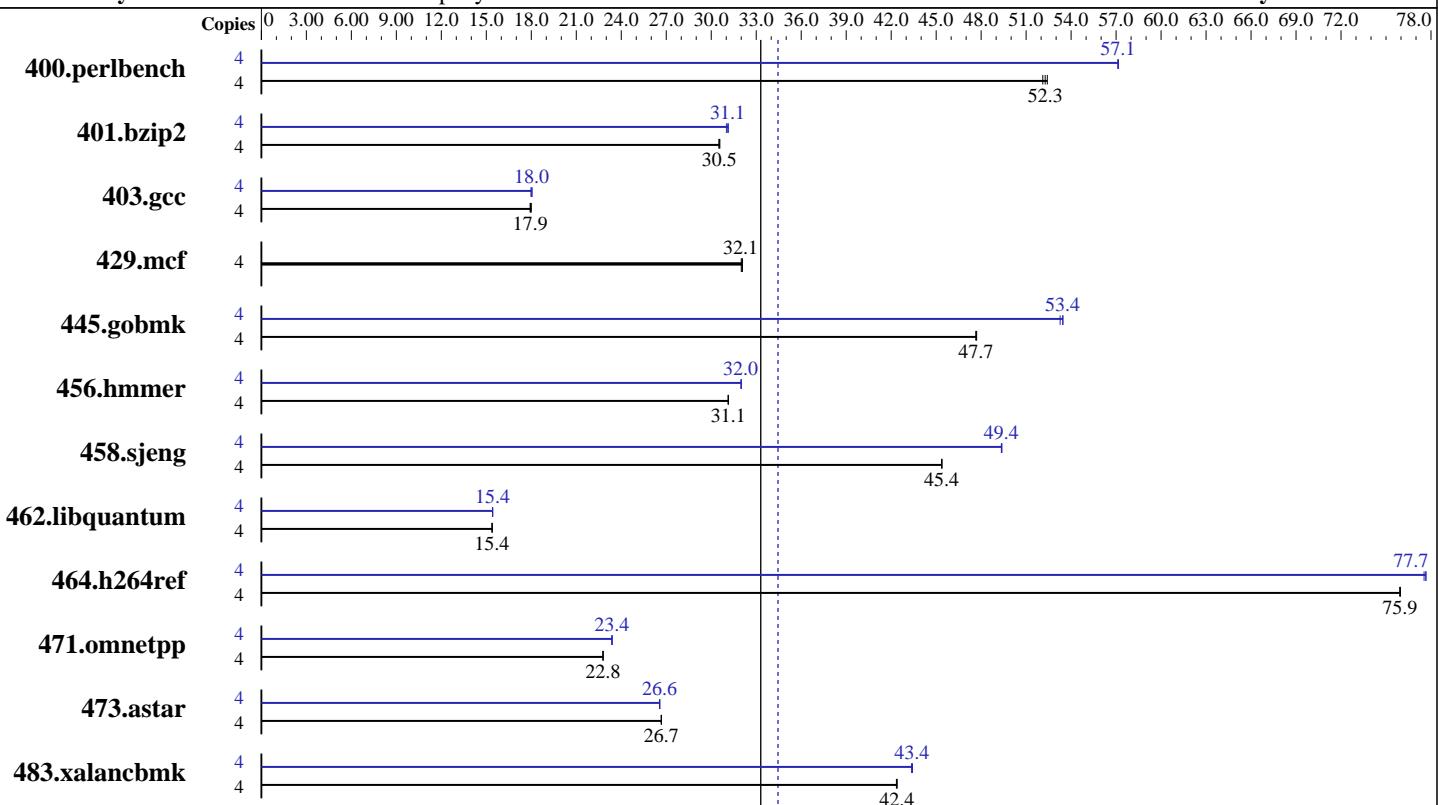

Hardware

CPU Name: Intel Xeon E5320
CPU Characteristics: 1.86 GHz, 2x4 MB L2 shared, 1066 MHz system bus
CPU MHz: 1860
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300 CL5)
Disk Subsystem: 1x72 GB 10k SAS
Other Hardware: None

Software

Operating System: Windows Server 2003 Enterprise x64 Edition SP1
Compiler: Intel C++ Compiler for 32-bit applications, Version 9.1, Build 20061103Z
Package ID: W_CC_C_9.1.033
Microsoft Visual Studio .NET 2003 (v7.1.3088, for libraries)
Auto Parallel: No
File System: NTFS
System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: MicroQuill SmartHeap Library 8.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c
(1.86 GHz, Intel Xeon processor E5320)

SPECint_rate2006 = 34.5

SPECint_rate_base2006 = 33.3

CPU2006 license: 3

Test date: Feb-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2007

Tested by: Hewlett-Packard Company

Software Availability: Nov-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	748	52.3	746	52.4	750	52.1	4	684	57.2	684	57.1	684	57.1
401.bzip2	4	1262	30.6	1265	30.5	1264	30.5	4	1245	31.0	1240	31.1	1241	31.1
403.gcc	4	1795	17.9	1789	18.0	1796	17.9	4	1791	18.0	1784	18.1	1786	18.0
429.mcf	4	1137	32.1	1138	32.1	1140	32.0	4	1137	32.1	1138	32.1	1140	32.0
445.gobmk	4	881	47.6	880	47.7	880	47.7	4	785	53.4	788	53.3	785	53.5
456.hammer	4	1199	31.1	1199	31.1	1198	31.1	4	1166	32.0	1167	32.0	1166	32.0
458.sjeng	4	1067	45.4	1067	45.4	1067	45.4	4	980	49.4	981	49.4	981	49.3
462.libquantum	4	5385	15.4	5386	15.4	5387	15.4	4	5377	15.4	5372	15.4	5374	15.4
464.h264ref	4	1166	75.9	1165	76.0	1166	75.9	4	1142	77.5	1140	77.7	1140	77.7
471.omnetpp	4	1097	22.8	1097	22.8	1097	22.8	4	1070	23.4	1069	23.4	1069	23.4
473.astar	4	1052	26.7	1053	26.7	1053	26.7	4	1056	26.6	1057	26.6	1058	26.5
483.xalancbmk	4	652	42.4	651	42.4	651	42.4	4	636	43.4	636	43.4	636	43.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Power Regulator set to Static High Performance Mode in BIOS.
Adjacent Sector Prefetch disabled in BIOS.

Base Compiler Invocation

C benchmarks:

 icl -Qvc7.1 -Qc99

C++ benchmarks:

 icl -Qvc7.1

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32

464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Base Optimization Flags

C benchmarks:

 -fast /F512000000 shlw32m.lib

 -link /FORCE:MULTIPLE

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c
(1.86 GHz, Intel Xeon processor E5320)

SPECint_rate2006 = 34.5

SPECint_rate_base2006 = 33.3

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Feb-2007

Hardware Availability: Jan-2007

Software Availability: Nov-2006

Base Optimization Flags (Continued)

C++ benchmarks:

```
-fast -Qcxx_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Peak Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32  
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000  
shlw32m.lib  
-link /FORCE:MULTIPLE
```

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: basepeak = yes

445.gobmk: Same as 400.perlbench

456.hmmer: Same as 400.perlbench

458.sjeng: Same as 400.perlbench

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c
(1.86 GHz, Intel Xeon processor E5320)

SPECint_rate2006 = 34.5

SPECint_rate_base2006 = 33.3

CPU2006 license: 3

Test date: Feb-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2007

Tested by: Hewlett-Packard Company

Software Availability: Nov-2006

Peak Optimization Flags (Continued)

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 400.perlbench

C++ benchmarks:

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/hp-ic91-flags.20090715.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/hp-ic91-flags.20090715.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 10:42:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 March 2007.