SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun SPARC Enterprise M9000

SPECint®_rate2006 = 1220

SPECint_rate_base2006 = 1060

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Mar-2007
Hardware Availability: Apr-2007
Software Availability: Jul-2007

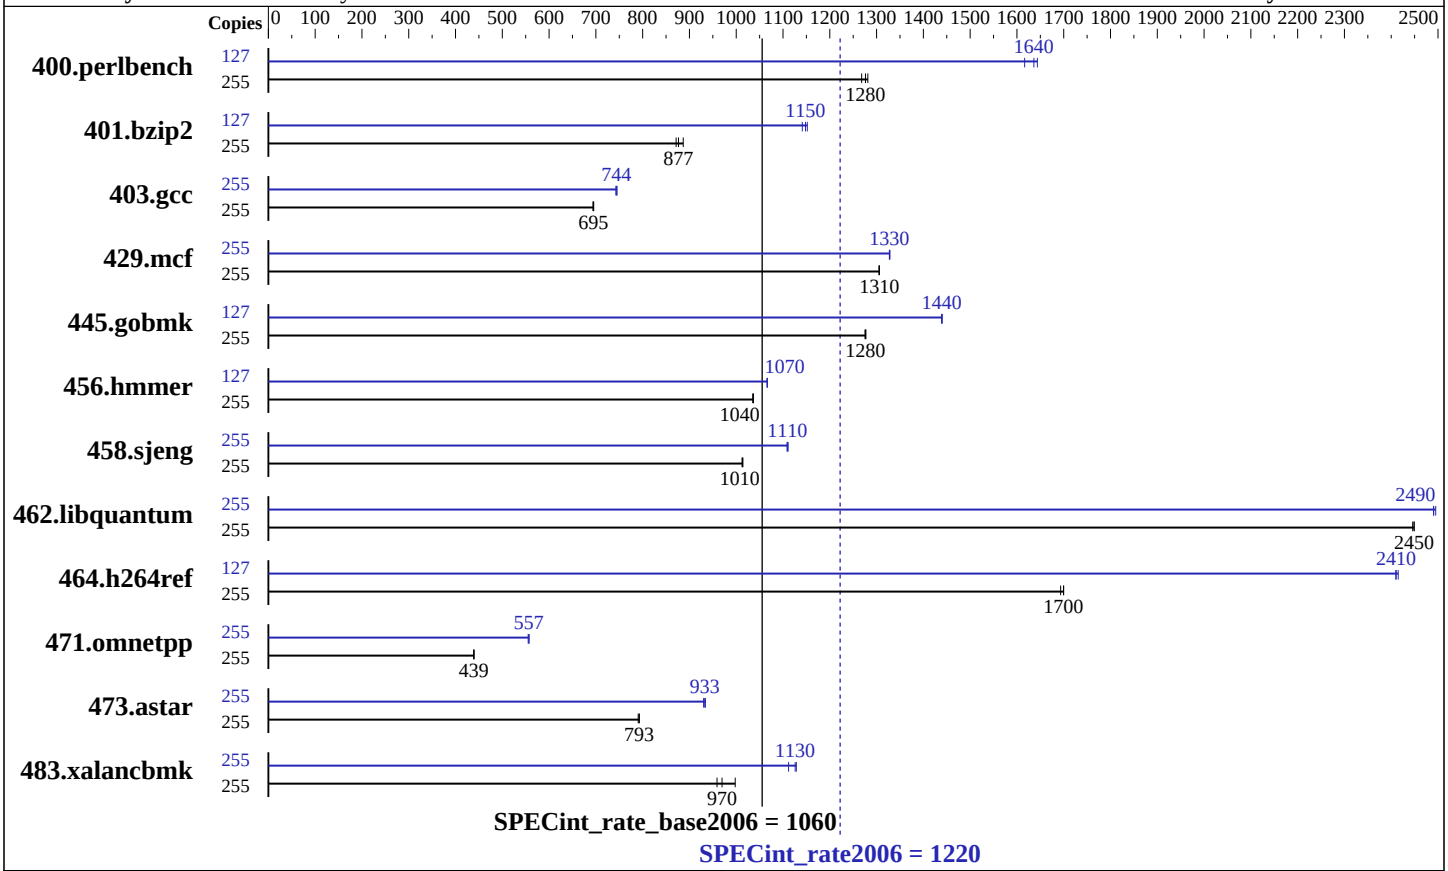

Hardware

CPU Name:	SPARC64 VI
CPU Characteristics:	
CPU MHz:	2280
FPU:	Integrated
CPU(s) enabled:	128 cores, 64 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1 to 16 CMUs; each CMU contains 2 or 4 chips
Primary Cache:	128 KB I + 128 KB D on chip per core
Secondary Cache:	5 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	1 TB (512 x 2 GB)
Disk Subsystem:	673 GB RAID 1+0 created by Solaris Volume Manager with 20 x 73 GB 10,000 RPM Fujitsu MAY2073RC SAS
Other Hardware:	None

Software

Operating System:	Solaris 10 7/07 (build s10s_u4wos_04)
Compiler:	Sun Studio 12 (Build 44.0)
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun SPARC Enterprise M9000

SPECint_rate2006 = 1220

SPECint_rate_base2006 = 1060

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Mar-2007
Hardware Availability: Apr-2007
Software Availability: Jul-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	255	1965	1270	1944	1280	**1952**	**1280**	127	768	1620	**758**	**1640**	755	1640
401.bzip2	255	**2807**	**877**	2823	872	2775	887	127	1074	1140	**1068**	**1150**	1064	1150
403.gcc	255	2952	695	**2955**	**695**	2959	694	255	2764	743	**2758**	**744**	2755	745
429.mcf	255	1781	1310	**1781**	**1310**	1782	1310	255	1750	1330	**1752**	**1330**	1752	1330
445.gobmk	255	**2096**	**1280**	2094	1280	2097	1280	127	**926**	**1440**	926	1440	925	1440
456.hmmer	255	2295	1040	2298	1040	**2295**	**1040**	127	1111	1070	**1111**	**1070**	1111	1070
458.sjeng	255	**3046**	**1010**	3042	1010	3047	1010	255	2778	1110	**2780**	**1110**	2783	1110
462.libquantum	255	**2158**	**2450**	2157	2450	2160	2450	255	2118	2500	**2121**	**2490**	2121	2490
464.h264ref	255	**3320**	**1700**	3320	1700	3332	1690	127	**1166**	**2410**	1166	2410	1164	2410
471.omnetpp	255	3630	439	**3629**	**439**	3626	439	255	2860	557	**2863**	**557**	2870	555
473.astar	255	**2258**	**793**	2258	793	2265	790	255	**1919**	**933**	1916	934	1924	930
483.xalancbmk	255	1763	998	**1815**	**970**	1835	959	255	1582	1110	**1563**	**1130**	1559	1130

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Processes were bound to cores using "submit" and "pbind".
The SPEC toolset was bound to processor 0.

These shell commands request use of local 4MB pages:
      export LD_PRELOAD=madv.so.1:mpss.so.1
      export MPSSHEAP=4MB
      export MPSSSTACK=4MB
      export MADV=access_lwp
'access_lwp' means that the next light weight
process to touch the specified address range
will access it the most heavily.

ulimit -s 131072 was used to limit the space
consumed by the stack (and therefore make more
space available to the heap).

 /etc/system parameters
    autoup=300
       Causes pages older than the listed number of seconds to
       be written by fsflush.
    bufhwm=3000
       Memory byte limit for caching I/O buffers
    segmap_percent=1
       Set maximum percent memory for file system cache
    tune_t_fsflushr=3
       Controls how many seconds elapse between runs of the
       page flush daemon, fsflush.
```

Continued on next page

Operating System Notes (Continued)

```
 The "webconsole" service was turned off using
     svcadm disable webconsole
```

Platform Notes

```
"CMU" = CPU/Memory Unit; each holds 2 or 4 CPU chips.

Memory is 8-way interleaved by filling all slots with
the same capacity DIMMs.

This result was measured using a Sun SPARC Enterprise
M9000 Server.  Note that the Fujitsu SPARC Enterprise
M9000 and Sun SPARC Enterprise M9000 are electrically
equivalent.
```

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:
-fast -fma=fused -xcache=128/64/2:5120/256/10 -xipo=2 -xpagesize=4M
-xprefetch_level=2 -lbsdmalloc

C++ benchmarks:
-xdepend -library=stlport4 -fast -fma=fused
-xcache=128/64/2:5120/256/10 -xipo=2 -xpagesize=4M -xprefetch_level=2
-lbsdmalloc

Base Other Flags

C benchmarks:
```
-xjobs=24 -V -#
```

C++ benchmarks:
```
-xjobs=24 -verbose=diags,version
```

Peak Compiler Invocation

C benchmarks:
```
cc
```

C++ benchmarks:
```
CC
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M
-xalias_level=std -Xc -xipo=2 -xrestrict -fma=fused
-xprefetch=latx:5 -lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M
-xalias_level=strong -fma=fused -xprefetch=latx:5

403.gcc: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M -xipo=2
-xalias_level=std -xprefetch_level=2 -xarch=v8plusb
-fma=fused -ll2amm

429.mcf: -fast -xcache=128/64/2:5120/256/10 -xpagesize=4M -xipo=2
-xprefetch_level=2 -xrestrict -xalias_level=std
-W2,-Apf:llist=3 -W2,-Apf:noinnerllist -xprefetch=latx:5

Continued on next page

Peak Optimization Flags (Continued)

429.mcf (continued):
-lfast

445.gobmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M
-xalias_level=std -xrestrict -fma=fused

456.hmmer: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M -xipo=2
-fma=fused

458.sjeng: Same as 456.hmmer

462.libquantum: -fast -xcache=128/64/2:5120/256/10 -xpagesize=4M -xipo=2
-xprefetch_level=2 -fma=fused -xprefetch=latx:3
-lbsdmalloc

464.h264ref: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M -xipo=2
-xalias_level=std -xarch=v8plusb -ll2amm

C++ benchmarks:

471.omnetpp: -xdepend -library=stlport4
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M
-xalias_level=compatible -xipo=2 -xprefetch_level=2
-Qoption cg -Qlp-av=0 -fma=fused -lfast

473.astar: -xdepend -library=stlport4 -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M
-xalias_level=compatible -xipo=2 -xprefetch_level=2
-fma=fused -xprefetch=latx:5 -lfast

483.xalancbmk: -xdepend -library=stlport4
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M
-xalias_level=compatible -xipo=2 -xprefetch_level=2
-fma=fused -xprefetch=latx:5 -lfast

Peak Other Flags

C benchmarks:
```
-xjobs=24 -V -#
```

C++ benchmarks:
```
-xjobs=24 -verbose=diags,version
```

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.02.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.02.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 11:29:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 May 2007.