



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460  
(Intel Xeon processor E5335,2.00GHz)

SPECint®2006 = 12.9

SPECint\_base2006 = 12.4

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Apr-2007

Hardware Availability: Mar-2007

Software Availability: Dec-2006

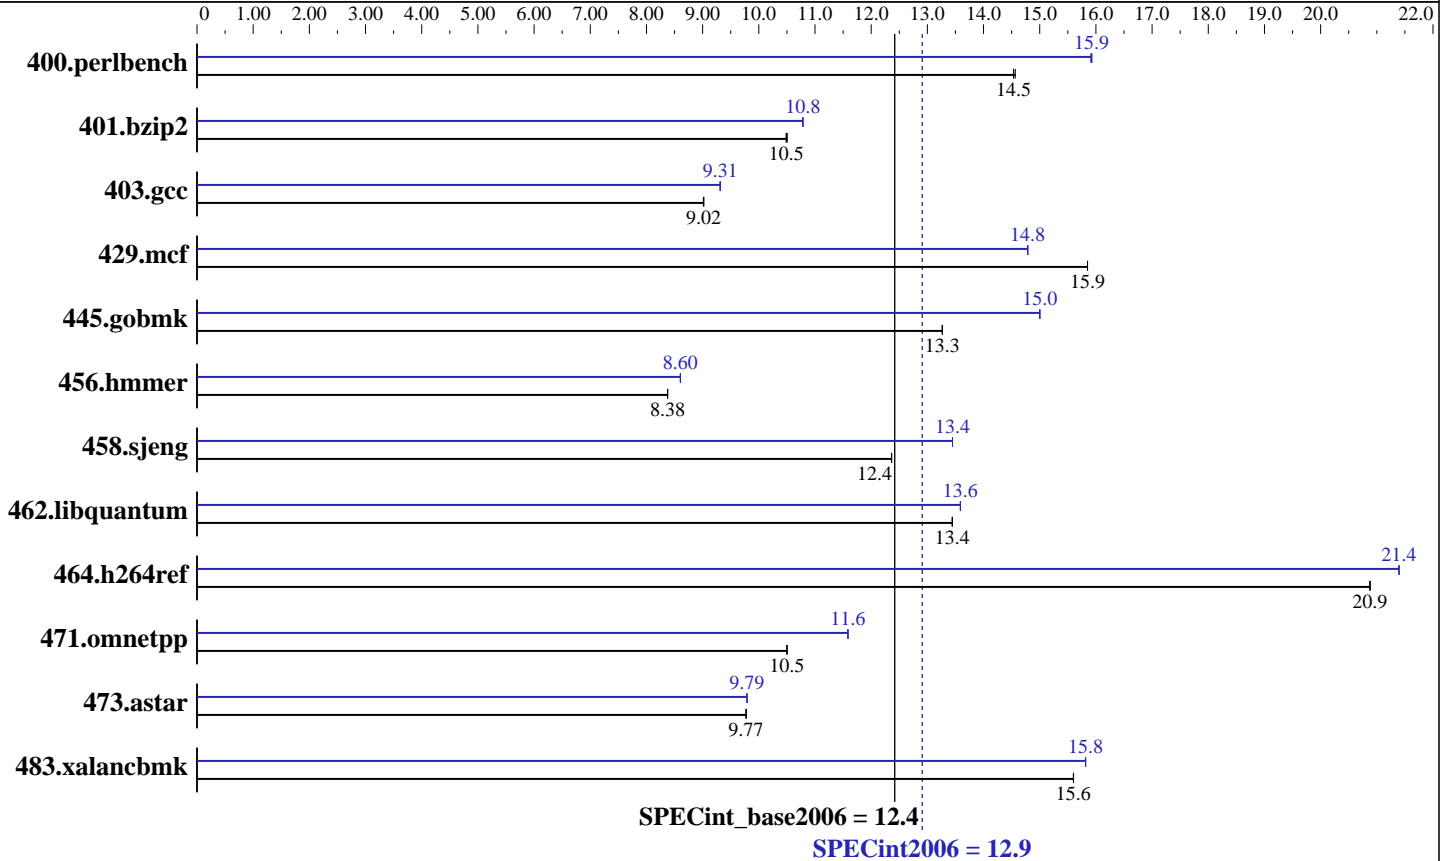

### Hardware

CPU Name: Intel Xeon E5335  
 CPU Characteristics: 2.00 GHz, 8MB L2, 1333MHz bus  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 1 core, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 to 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 24 GB (2GB DIMMx12, FB-DIMM PC2-5300F ECC CL5)  
 Disk Subsystem: 73 GB SAS, 10000RPM  
 Other Hardware: None

### Software

Operating System: Windows Server 2003 R2 Enterprise X64 Edition Service Pack1  
 Compiler: Intel C++ Compiler for IA32 version 9.1  
 Package ID W\_CC\_C\_9.1.033 Build no 20061103Z  
 Microsoft Visual Studio .NET 2003 (lib & linker)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MicroQuill SmartHeap Library 8.0 (shIW32M.lib)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460  
(Intel Xeon processor E5335,2.00GHz)

SPECint2006 = 12.9

SPECint\_base2006 = 12.4

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Apr-2007  
Hardware Availability: Mar-2007  
Software Availability: Dec-2006

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	671	14.6	672	14.5	<u>672</u>	<u>14.5</u>	614	15.9	<u>614</u>	<u>15.9</u>	613	15.9
401.bzip2	919	10.5	<u>920</u>	<u>10.5</u>	920	10.5	895	10.8	895	10.8	<u>895</u>	<u>10.8</u>
403.gcc	892	9.02	893	9.01	<u>893</u>	<u>9.02</u>	864	9.31	865	9.31	<u>864</u>	<u>9.31</u>
429.mcf	575	15.9	575	15.9	<u>575</u>	<u>15.9</u>	617	14.8	617	14.8	<u>617</u>	<u>14.8</u>
445.gobmk	791	13.3	791	13.3	<u>791</u>	<u>13.3</u>	699	15.0	<u>699</u>	<u>15.0</u>	699	15.0
456.hammer	1114	8.38	<u>1114</u>	<u>8.38</u>	1114	8.38	1084	8.60	1084	8.60	<u>1084</u>	<u>8.60</u>
458.sjeng	979	12.4	<u>979</u>	<u>12.4</u>	979	12.4	<u>900</u>	<u>13.4</u>	900	13.4	900	13.4
462.libquantum	1541	13.4	1541	13.4	<u>1541</u>	<u>13.4</u>	1525	13.6	<u>1525</u>	<u>13.6</u>	1525	13.6
464.h264ref	1060	20.9	1060	20.9	<u>1060</u>	<u>20.9</u>	1034	21.4	1034	21.4	<u>1034</u>	<u>21.4</u>
471.omnetpp	595	10.5	595	10.5	<u>595</u>	<u>10.5</u>	539	11.6	<u>539</u>	<u>11.6</u>	539	11.6
473.astar	718	9.77	<u>718</u>	<u>9.77</u>	718	9.77	<u>717</u>	<u>9.79</u>	717	9.79	717	9.79
483.xalancbmk	442	15.6	442	15.6	<u>442</u>	<u>15.6</u>	<u>436</u>	<u>15.8</u>	436	15.8	436	15.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

/NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment

## General Notes

The NovaScale R440 and the NovaScale R460 models are electronically equivalent.  
The results have been measured on a NovaScale R440 model.

## Base Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99  
  
C++ benchmarks:  
icl -Qvc7.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460  
(Intel Xeon processor E5335,2.00GHz)

SPECint2006 = 12.9

SPECint\_base2006 = 12.4

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Apr-2007  
Hardware Availability: Mar-2007  
Software Availability: Dec-2006

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Base Optimization Flags

C benchmarks:  
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:  
-fast -Qcxx\_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99

C++ benchmarks:  
icl -Qvc7.1

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Peak Optimization Flags

C benchmarks:  
-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

C++ benchmarks:  
-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qcxx\_features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460  
(Intel Xeon processor E5335,2.00GHz)

SPECint2006 = 12.9

SPECint\_base2006 = 12.4

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Apr-2007  
**Hardware Availability:** Mar-2007  
**Software Availability:** Dec-2006

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 12:10:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 May 2007.