



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY BX620 S3, Intel Xeon processor E5310,  
1.60 GHz

SPECint<sup>®</sup>\_rate2006 = 62.2

SPECint\_rate\_base2006 = 59.1

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: Nov-2006

Software Availability: Feb-2007

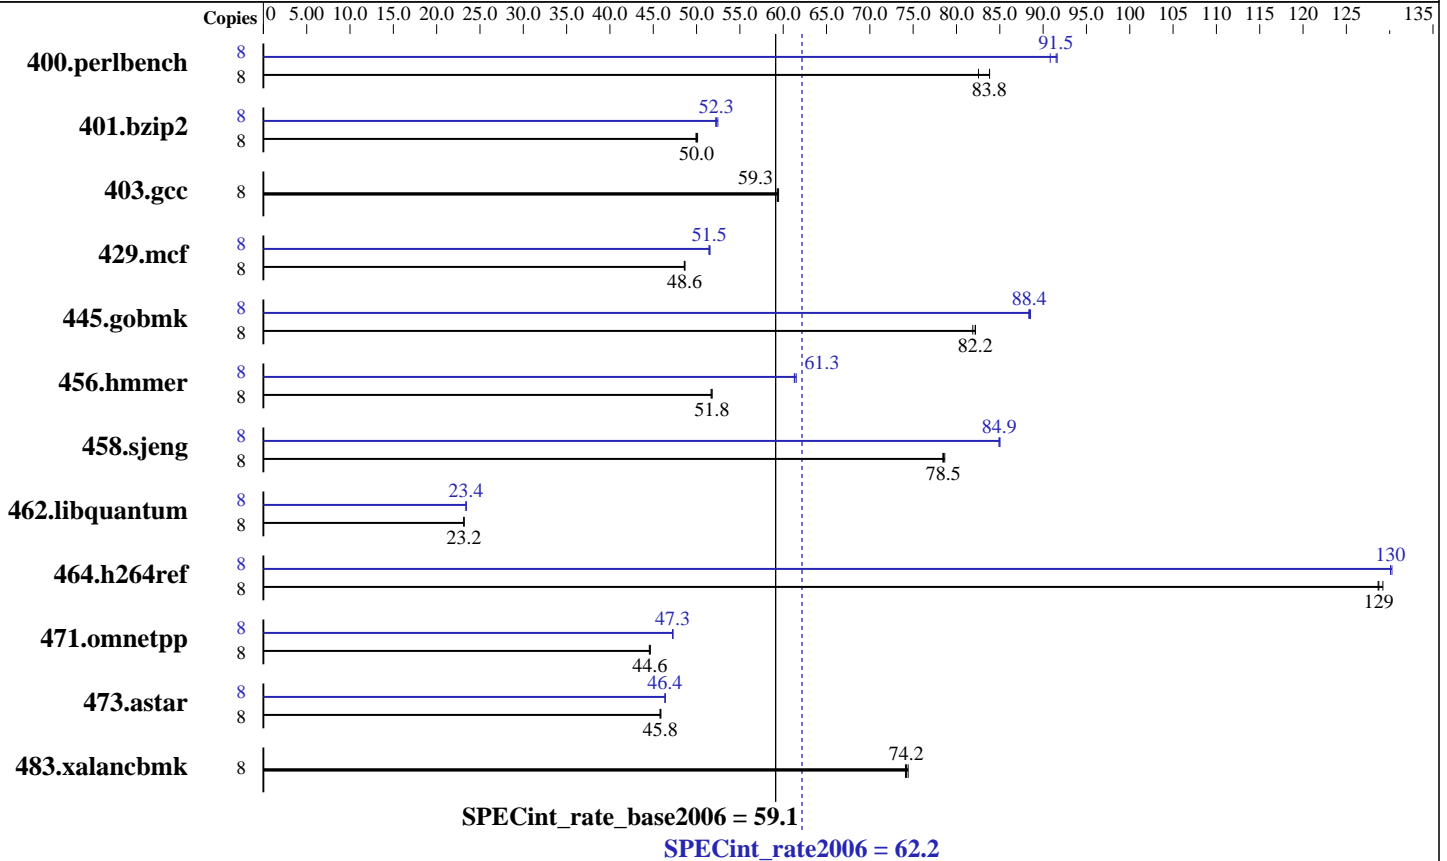

### Hardware

CPU Name: Intel Xeon E5310  
 CPU Characteristics: 1067 MHz system bus  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8x2 GB DDR2 PC2-5300F, 2 rank, CAS 5-5-5, with ECC)  
 Disk Subsystem: SAS (36GB 10000 rpm)  
 Other Hardware: None

### Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86\_64  
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package-ID: l\_cc\_p\_9.1.047  
 Auto Parallel: No  
 File System: ext2  
 System State: Multiuser, Runlevel 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Smart Heap Library, Version 8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY BX620 S3, Intel Xeon processor E5310,  
1.60 GHz

SPECint\_rate2006 = 62.2

SPECint\_rate\_base2006 = 59.1

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: Nov-2006

Software Availability: Feb-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	947	82.5	<u>933</u>	<u>83.8</u>	932	83.8	8	853	91.6	861	90.8	<u>854</u>	<u>91.5</u>
401.bzip2	8	1540	50.1	<u>1544</u>	<u>50.0</u>	1546	49.9	8	1479	52.2	1472	52.5	<u>1476</u>	<u>52.3</u>
403.gcc	8	1089	59.1	<u>1085</u>	<u>59.3</u>	1083	59.5	8	1089	59.1	<u>1085</u>	<u>59.3</u>	1083	59.5
429.mcf	8	<u>1500</u>	<u>48.6</u>	1502	48.6	1499	48.7	8	1415	51.6	1418	51.4	<u>1418</u>	<u>51.5</u>
445.gobmk	8	1021	82.2	<u>1021</u>	<u>82.2</u>	1025	81.9	8	948	88.5	<u>949</u>	<u>88.4</u>	950	88.3
456.hmmer	8	1445	51.7	1442	51.8	<u>1442</u>	<u>51.8</u>	8	1218	61.3	<u>1217</u>	<u>61.3</u>	1214	61.5
458.sjeng	8	1234	78.4	<u>1233</u>	<u>78.5</u>	1231	78.6	8	1138	85.0	1140	84.9	<u>1140</u>	<u>84.9</u>
462.libquantum	8	7156	23.2	<u>7160</u>	<u>23.2</u>	7165	23.1	8	7082	23.4	<u>7083</u>	<u>23.4</u>	7084	23.4
464.h264ref	8	<u>1375</u>	<u>129</u>	1376	129	1370	129	8	1359	130	<u>1361</u>	<u>130</u>	1361	130
471.omnetpp	8	1120	44.6	1122	44.5	<u>1120</u>	<u>44.6</u>	8	1058	47.3	1059	47.2	<u>1058</u>	<u>47.3</u>
473.astar	8	1224	45.9	<u>1226</u>	<u>45.8</u>	1226	45.8	8	1211	46.4	<u>1211</u>	<u>46.4</u>	1211	46.4
483.xalancbmk	8	742	74.4	<u>744</u>	<u>74.2</u>	745	74.1	8	742	74.4	<u>744</u>	<u>74.2</u>	745	74.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs

## General Notes

The system bus runs at 1067 MHz

All binaries were built with 32-bit Intel compiler except:  
401.bzip2, 456.hmmer and 462.libquantum in peak were built with  
64-bit Intel compiler by changing the path for include and library files.

BIOS configuration:  
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers in your country please see:  
<http://www.fujitsu-siemens.com/countries>

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY BX620 S3, Intel Xeon processor E5310,  
1.60 GHz

**SPECint\_rate2006 = 62.2**

**SPECint\_rate\_base2006 = 59.1**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** Apr-2007

**Hardware Availability:** Nov-2006

**Software Availability:** Feb-2007

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_X64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-xP -O3 -ipo -no-prec-div -L/opt/SmartHeap\_8\_1/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/9.1.047/bin/icc  
-I/opt/intel/cce/9.1.047/include  
-L/opt/intel/cce/9.1.047/lib

456.hmmer: /opt/intel/cce/9.1.047/bin/icc  
-I/opt/intel/cce/9.1.047/include  
-L/opt/intel/cce/9.1.047/lib

462.libquantum: /opt/intel/cce/9.1.047/bin/icc  
-I/opt/intel/cce/9.1.047/include  
-L/opt/intel/cce/9.1.047/lib

C++ benchmarks:

icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY BX620 S3, Intel Xeon processor E5310,  
1.60 GHz

**SPECint\_rate2006 = 62.2**

**SPECint\_rate\_base2006 = 59.1**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** Apr-2007

**Hardware Availability:** Nov-2006

**Software Availability:** Feb-2007

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

401.bzip2: -fast

403.gcc: basepeak = yes

429.mcf: -prof\_gen(pass 1) -prof\_use(pass 2) -fast  
-L/opt/SmartHeap\_8\_1/lib -lsmartheap

445.gobmk: Same as 429.mcf

456.hmmer: Same as 400.perlbench

458.sjeng: Same as 429.mcf

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 429.mcf

C++ benchmarks:

471.omnetpp: -prof\_gen(pass 1) -prof\_use(pass 2) -xP -O3 -ipo  
-no-prec-div -L/opt/SmartHeap\_8\_1/lib -lsmartheap

473.astar: -prof\_gen(pass 1) -prof\_use(pass 2) -fast  
-L/opt/SmartHeap\_8\_1/lib -lsmartheap

483.xalancbmk: basepeak = yes

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.09.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.09.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 12:09:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 May 2007.