



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint®\_rate2006 = 52.7

## ProLiant BL685c (AMD Opteron 8220)

SPECint\_rate\_base2006 = 47.2

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2007

Hardware Availability: Feb-2007

Software Availability: Apr-2007

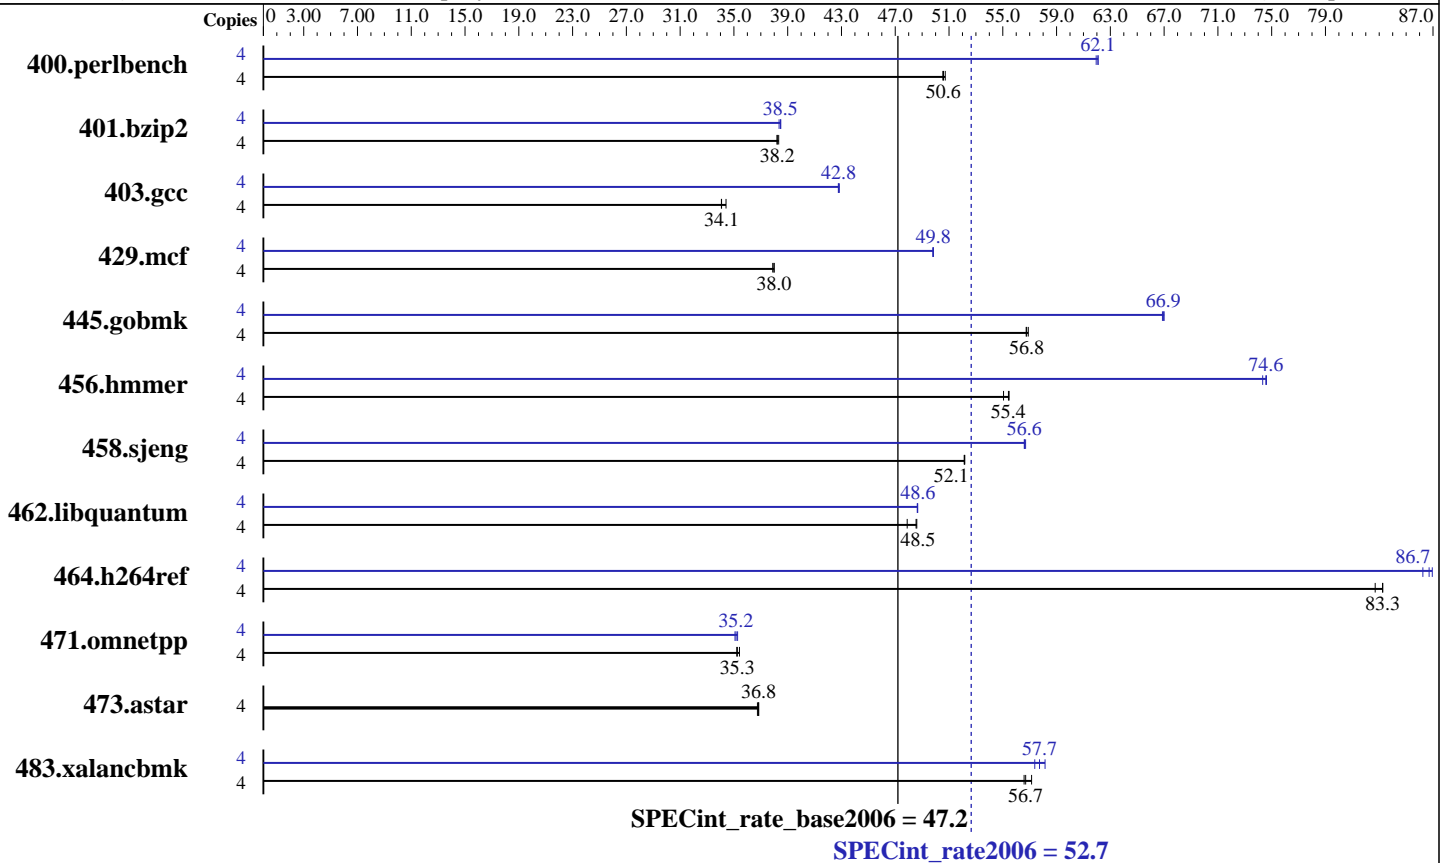

### Hardware

CPU Name: AMD Opteron 8220  
 CPU Characteristics:  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8x2 GB, PC2-5300P CL5)  
 Disk Subsystem: 1 x 72 GB 10 K SAS  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64)  
 2.6.16.21-0.8-smp  
 Compiler: QLogic PathScale  
 Compiler Suite, Release 3.0  
 Auto Parallel: No  
 File System: ext2  
 System State: Multi-user, run level 3  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.0 32 bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 52.7

ProLiant BL685c (AMD Opteron 8220)

SPECint\_rate\_base2006 = 47.2

CPU2006 license: 3

Test date: Apr-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2007

Tested by: Hewlett-Packard Company

Software Availability: Apr-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	771	50.7	773	50.5	<b>773</b>	<b>50.6</b>	4	<b>630</b>	<b>62.1</b>	629	62.1	631	61.9
401.bzip2	4	<b>1010</b>	<b>38.2</b>	1010	38.2	1007	38.3	4	1003	38.5	<b>1004</b>	<b>38.5</b>	1006	38.4
403.gcc	4	936	34.4	<b>945</b>	<b>34.1</b>	945	34.1	4	<b>753</b>	<b>42.8</b>	753	42.8	752	42.8
429.mcf	4	<b>961</b>	<b>38.0</b>	960	38.0	963	37.9	4	733	49.8	<b>732</b>	<b>49.8</b>	732	49.8
445.gobmk	4	737	56.9	<b>739</b>	<b>56.8</b>	740	56.7	4	<b>627</b>	<b>66.9</b>	626	67.0	627	66.9
456.hmmer	4	<b>673</b>	<b>55.4</b>	673	55.5	678	55.1	4	500	74.6	502	74.3	<b>500</b>	<b>74.6</b>
458.sjeng	4	<b>928</b>	<b>52.1</b>	928	52.1	928	52.2	4	<b>855</b>	<b>56.6</b>	855	56.6	854	56.7
462.libquantum	4	1731	47.9	<b>1707</b>	<b>48.5</b>	1705	48.6	4	1703	48.7	1704	48.6	<b>1704</b>	<b>48.6</b>
464.h264ref	4	<b>1063</b>	<b>83.3</b>	1063	83.3	1070	82.7	4	1026	86.2	1018	86.9	<b>1021</b>	<b>86.7</b>
471.omnetpp	4	<b>709</b>	<b>35.3</b>	706	35.4	710	35.2	4	709	35.3	713	35.1	<b>711</b>	<b>35.2</b>
473.astar	4	762	36.8	764	36.7	<b>762</b>	<b>36.8</b>	4	762	36.8	764	36.7	<b>762</b>	<b>36.8</b>
483.xalancbmk	4	483	57.1	488	56.6	<b>487</b>	<b>56.7</b>	4	475	58.1	<b>478</b>	<b>57.7</b>	481	57.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

Node interleaving is disabled  
taskset utility used to bind CPU(s) to processes  
ulimit -s unlimited set

## Base Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 52.7

ProLiant BL685c (AMD Opteron 8220)

SPECint\_rate\_base2006 = 47.2

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2007

Hardware Availability: Feb-2007

Software Availability: Apr-2007

## Base Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc\_alg=1

C++ benchmarks:

-Ofast -m32 -L/cpu2006/amd514K8.lib/32 -lsmartheap

## Peak Compiler Invocation

C benchmarks:

pathcc

C++ benchmarks:

pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:opt=0

401.bzip2: -O3 -LNO:ou\_prod\_max=10 -OPT:Ofast -OPT:alias=disjoint

403.gcc: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O3  
-OPT:Ofast

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 52.7

ProLiant BL685c (AMD Opteron 8220)

SPECint\_rate\_base2006 = 47.2

CPU2006 license: 3

Test date: Apr-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2007

Tested by: Hewlett-Packard Company

Software Availability: Apr-2007

## Peak Optimization Flags (Continued)

429.mcf: -m32 -O3 -ipa -L/cpu2006/amd514K8.lib/32 -lsmartheap

445.gobmk: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off  
-WOPT:retype\_expr=on

456.hmmr: -O2 -OPT:alias=disjoint -OPT:malloc\_alg=1 -CG:cflow=0

458.sjeng: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:plimit=50000 -IPA:pu\_reorder=2

462.libquantum: -O3 -ipa -CG:local\_fwd\_sched=on -IPA:space=1000

464.h264ref: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0

C++ benchmarks:

471.omnetpp: -Ofast -CG:gcm=off -m32  
-L/cpu2006/amd514K8.lib/32 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -Ofast -m32 -OPT:unroll\_times\_max=8  
-L/cpu2006/amd514K8.lib/32 -lsmartheap

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.16.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.16.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.16.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.16.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 12:15:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 May 2007.