SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor E5320,1.86GHz)

SPECfp®2006 = 11.1

SPECfp_base2006 = 10.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Apr-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

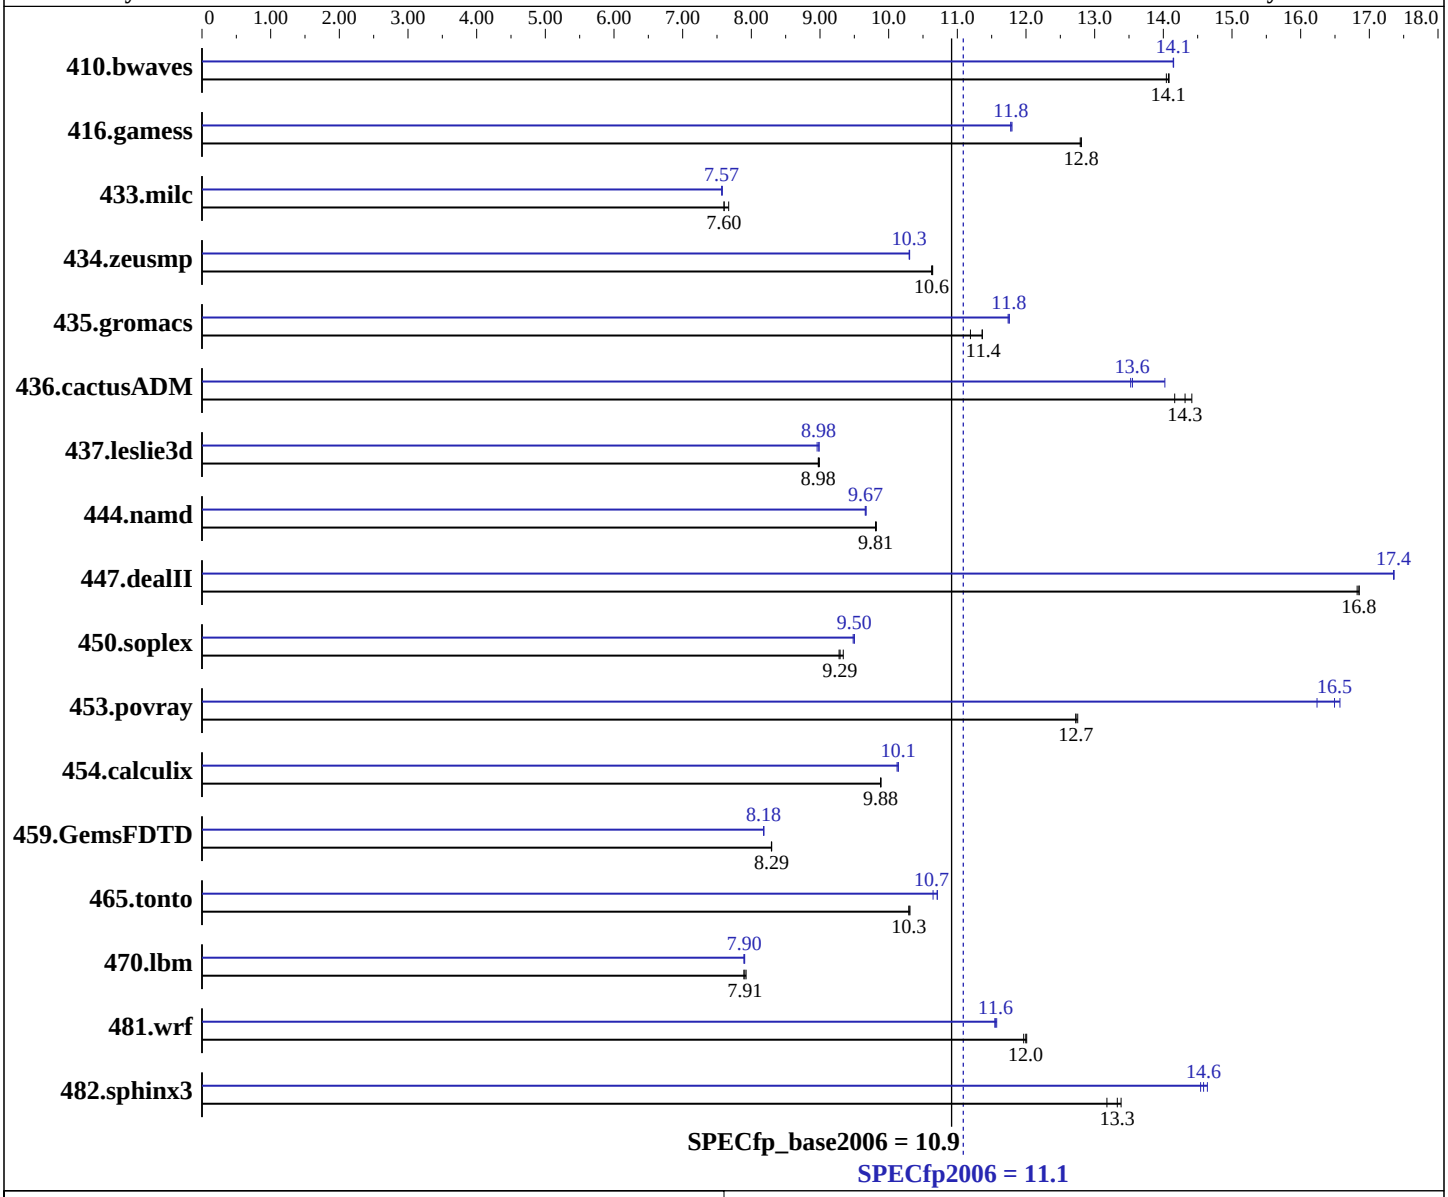

Hardware

CPU Name:	Intel Xeon E5320
CPU Characteristics:	1.86 GHz, 8 MB L2, 1066 MHz system bus
CPU MHz:	1860
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 4 cores/chip
CPU(s) orderable:	1 to 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10 (EM64T) kernel 2.6.16.21-0.8-smp
Compiler:	Intel C++ Compiler for Intel EM64T-based applications, Version 9.1 Package ID l_cc_c_9.1.045 Build no 20061101 Intel Fortran Compiler for Intel EM64T-based applications, Version 9.1 Package ID l_fc_c_9.1.040 Build no 20061101
Auto Parallel:	No

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor E5320,1.86GHz)

SPECfp2006 = 11.1

SPECfp_base2006 = 10.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Apr-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

L3 Cache:	None	File System:	ext2
Other Cache:	None	System State:	Multi-user run level 3
Memory:	12 GB (12x1 GB) FB-DIMM PC2-5300F ECC CL5	Base Pointers:	64-bit
Disk Subsystem:	1x73 GB SAS, 10000 RPM	Peak Pointers:	32/64-bit
Other Hardware:	None	Other Software:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**966**	**14.1**	965	14.1	968	14.0	**961**	**14.1**	960	14.1	961	14.1
416.gamess	**1529**	**12.8**	1529	12.8	1531	12.8	1660	11.8	**1662**	**11.8**	1662	11.8
433.milc	1197	7.67	**1207**	**7.60**	1207	7.60	1212	7.58	1213	7.57	**1213**	**7.57**
434.zeusmp	855	10.6	856	10.6	**856**	**10.6**	884	10.3	**883**	**10.3**	883	10.3
435.gromacs	**628**	**11.4**	628	11.4	638	11.2	**608**	**11.8**	607	11.8	608	11.7
436.cactusADM	844	14.2	829	14.4	**835**	**14.3**	852	14.0	**882**	**13.6**	884	13.5
437.leslie3d	1045	8.99	**1047**	**8.98**	1047	8.98	1046	8.99	**1047**	**8.98**	1049	8.96
444.namd	818	9.81	**817**	**9.81**	817	9.82	**830**	**9.67**	829	9.67	830	9.66
447.dealII	**679**	**16.8**	680	16.8	679	16.9	**659**	**17.4**	659	17.4	659	17.4
450.soplex	893	9.34	**897**	**9.29**	899	9.28	878	9.50	**878**	**9.50**	879	9.48
453.povray	**418**	**12.7**	418	12.7	417	12.8	328	16.2	**323**	**16.5**	321	16.6
454.calculix	834	9.89	**835**	**9.88**	835	9.88	815	10.1	814	10.1	**814**	**10.1**
459.GemsFDTD	**1279**	**8.29**	1280	8.29	1279	8.30	1297	8.18	**1297**	**8.18**	1297	8.18
465.tonto	954	10.3	**956**	**10.3**	956	10.3	919	10.7	**919**	**10.7**	924	10.6
470.lbm	1734	7.92	**1738**	**7.91**	1741	7.89	1738	7.90	**1740**	**7.90**	1741	7.89
481.wrf	**931**	**12.0**	930	12.0	933	12.0	965	11.6	**966**	**11.6**	967	11.5
482.sphinx3	1456	13.4	1479	13.2	**1462**	**13.3**	1331	14.6	1340	14.5	**1336**	**14.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Environment stack size set to 'unlimited'
'/usr/bin/taskset' used to bind processes to CPUs
System was booted uniprocessor by setting "maxcpus=0"
kernel parameter in menu.lst
```

General Notes

```
The NovaScale R440 and the NovaScale R460 models are
electronically equivalent.
The results have been measured on a NovaScale R460 model.
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

C++ benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

Fortran benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast

Benchmarks using both Fortran and C:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:39:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 May 2007.