SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor X5355,2.66GHz)

SPECint®_rate2006 = 78.4

SPECint_rate_base2006 = 76.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: May-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

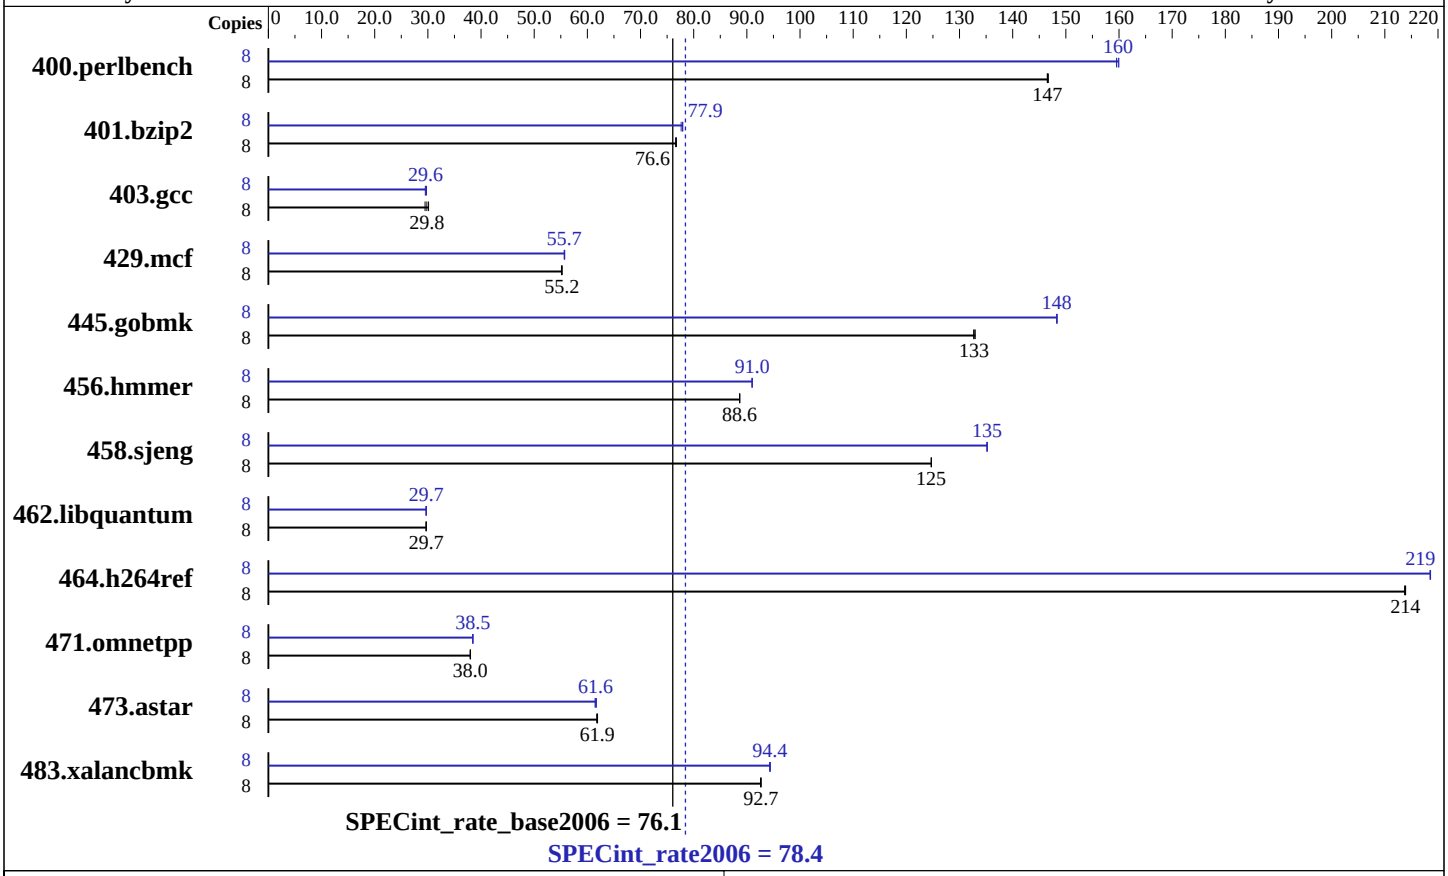

Hardware

CPU Name:	Intel Xeon X5355
CPU Characteristics:	2.66 GHz, 8 MB L2, 1333 MHz bus
CPU MHz:	2666
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1 to 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	24 GB (12x2 GB) FB-DIMM PC2-5300F ECC CL5
Disk Subsystem:	1x73 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 R2 Enterprise X64 Edition Service Pack1
Compiler:	Intel C++ Compiler for IA32 version 9.1 Package ID W_CC_C_9.1.033 Build no 20061103Z Microsoft Visual Studio .NET 2003 (lib & linker)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill SmartHeap Library 8.0 (shlW32M.lib)

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor X5355,2.66GHz)

SPECint_rate2006 = 78.4

SPECint_rate_base2006 = 76.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: May-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	533	147	**533**	**147**	533	147	8	**489**	**160**	490	160	489	160
401.bzip2	8	1006	76.7	1007	76.6	**1007**	**76.6**	8	**991**	**77.9**	991	77.9	994	77.6
403.gcc	8	2185	29.5	**2160**	**29.8**	2137	30.1	8	2182	29.5	**2176**	**29.6**	2165	29.7
429.mcf	8	1323	55.1	1321	55.2	**1321**	**55.2**	8	**1310**	**55.7**	1309	55.7	1311	55.6
445.gobmk	8	631	133	633	133	**632**	**133**	8	**566**	**148**	566	148	566	148
456.hmmer	8	**842**	**88.6**	842	88.6	842	88.7	8	820	91.0	820	91.0	**820**	**91.0**
458.sjeng	8	776	125	**776**	**125**	776	125	8	**716**	**135**	716	135	716	135
462.libquantum	8	**5585**	**29.7**	5585	29.7	5584	29.7	8	5580	29.7	**5583**	**29.7**	5590	29.7
464.h264ref	8	828	214	**828**	**214**	828	214	8	810	219	**810**	**219**	810	218
471.omnetpp	8	1315	38.0	**1316**	**38.0**	1317	38.0	8	1300	38.5	**1300**	**38.5**	1300	38.5
473.astar	8	**907**	**61.9**	909	61.8	907	61.9	8	**912**	**61.6**	910	61.7	914	61.4
483.xalancbmk	8	**596**	**92.7**	596	92.6	596	92.7	8	**585**	**94.4**	585	94.4	585	94.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
The NovaScale R440 and the NovaScale R460 models are
electronically equivalent.
The results have been measured on a NovaScale R440 model.
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:
```
icl -Qvc7.1
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Base Optimization Flags

C benchmarks:
```
-fast /F512000000 shlw32m.lib            -link /FORCE:MULTIPLE
```

C++ benchmarks:
```
-fast -Qcxx_features /F512000000 shlw32m.lib
            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:
```
icl -Qvc7.1
```

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Peak Optimization Flags

C benchmarks:
```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000 shlw32m.lib
            -link /FORCE:MULTIPLE
```

C++ benchmarks:
```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F512000000 shlw32m.lib            -link /FORCE:MULTIPLE
```

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/flags.20090714.00.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/flags.20090714.00.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:50:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 May 2007.