



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale T820  
(Intel Xeon processor 3040, 1.86GHz)

**SPECfp®\_rate2006 = 19.7**

**SPECfp\_rate\_base2006 = 19.4**

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: May-2007

Hardware Availability: Mar-2007

Software Availability: Dec-2006

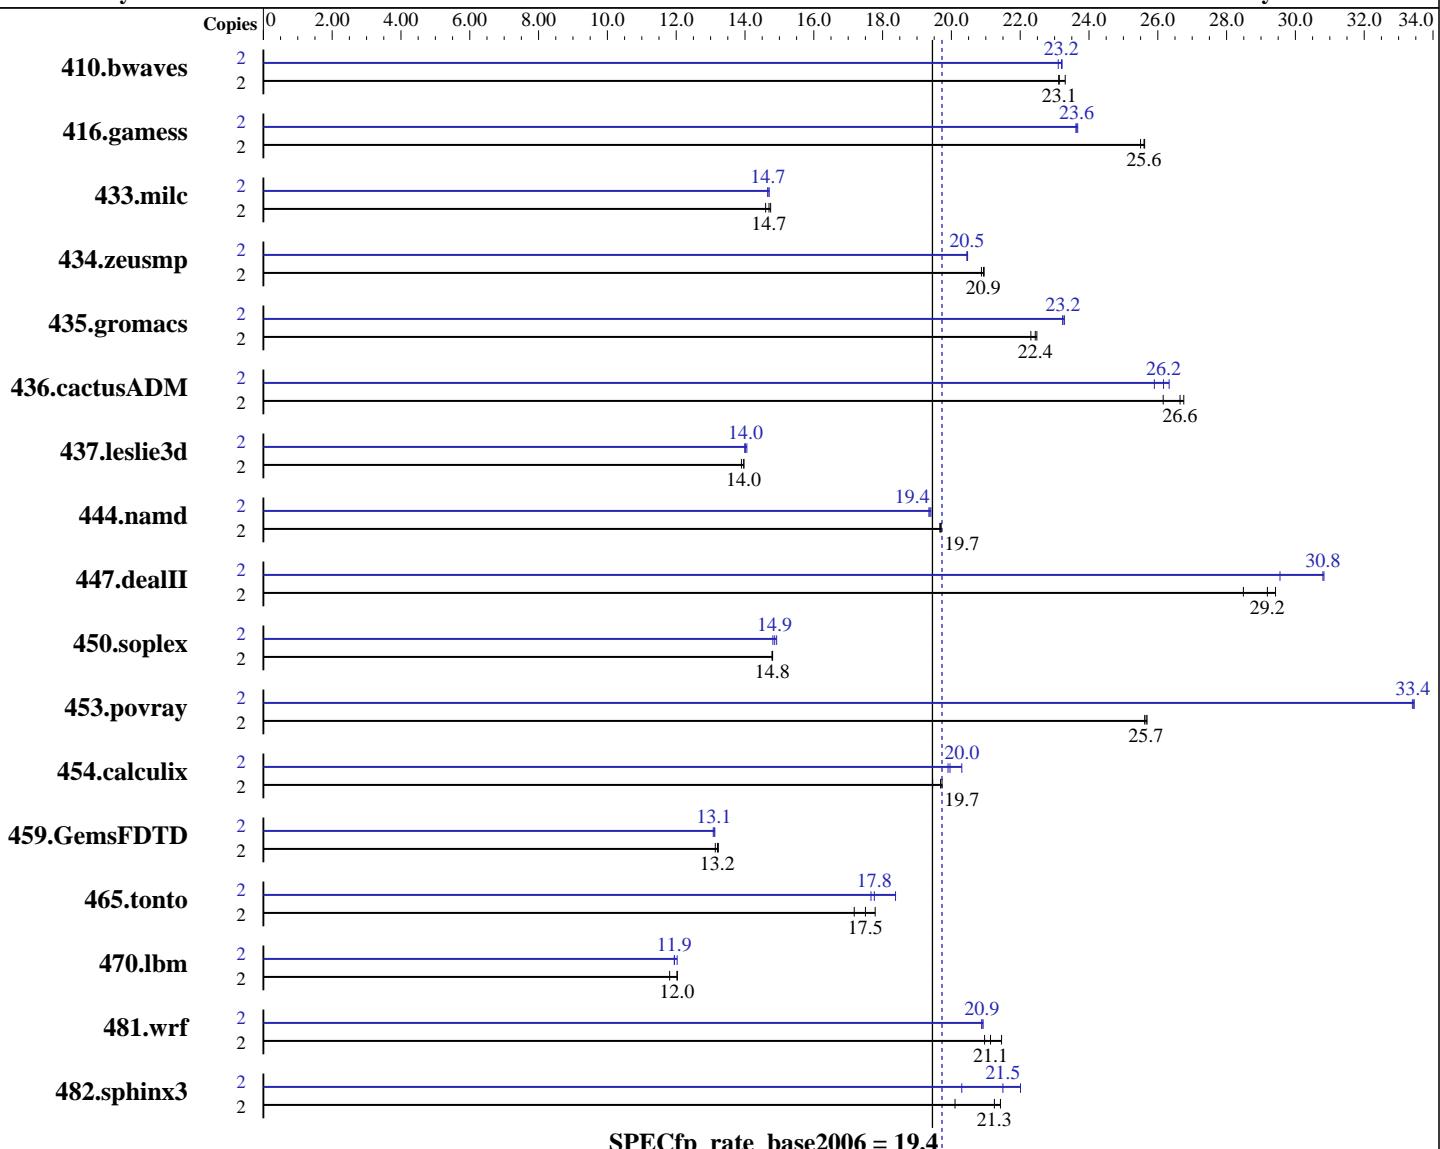

### Hardware

CPU Name: Intel Xeon 3040  
CPU Characteristics: 1.86 GHz, 4 MB L2, 1066 MHz system bus  
CPU MHz: 1860  
FPU: Integrated  
CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 2 MB I+D on chip per chip

### Software

Operating System: SuSE Linux Enterprise Server 10 (EM64T)  
Compiler: Intel C++ Compiler for Intel EM64T-based applications, Version 9.1  
Auto Parallel: No

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale T820  
(Intel Xeon processor 3040, 1.86GHz)

**SPECfp\_rate2006 = 19.7**

**SPECfp\_rate\_base2006 = 19.4**

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: May-2007

Hardware Availability: Mar-2007

Software Availability: Dec-2006

L3 Cache: None  
Other Cache: None  
Memory: 4 GB (4x1 GB) PC2-4200E ECC CL4  
Disk Subsystem: 1x160 GB SATA2, 7200 RPM  
Other Hardware: None

File System: ext2  
System State: Multi-user run level 3  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	1176	23.1	<u>1175</u>	<b>23.1</b>	1166	23.3	2	1171	23.2	<u>1172</u>	<b>23.2</b>	1176	23.1
416.gamess	2	1529	25.6	<u>1530</u>	<b>25.6</b>	1536	25.5	2	1658	23.6	<u>1656</u>	<b>23.6</b>	1654	23.7
433.milc	2	1258	14.6	<u>1249</u>	<b>14.7</b>	1245	14.7	2	1249	14.7	<u>1252</u>	<b>14.7</b>	1252	14.7
434.zeusmp	2	872	20.9	<u>869</u>	<b>20.9</b>	869	21.0	2	889	20.5	<u>890</u>	<b>20.5</b>	890	20.5
435.gromacs	2	640	22.3	<u>636</u>	<b>22.4</b>	635	22.5	2	613	23.3	615	23.2	<u>614</u>	<b>23.2</b>
436.cactusADM	2	914	26.2	893	26.8	<u>897</u>	<b>26.6</b>	2	923	25.9	908	26.3	<u>913</u>	<b>26.2</b>
437.leslie3d	2	1353	13.9	<u>1346</u>	<b>14.0</b>	1346	14.0	2	<u>1341</u>	<b>14.0</b>	1338	14.1	1344	14.0
444.namd	2	814	19.7	<u>815</u>	<b>19.7</b>	816	19.7	2	829	19.3	<u>828</u>	<b>19.4</b>	827	19.4
447.dealII	2	778	29.4	<u>784</u>	<b>29.2</b>	803	28.5	2	774	29.6	<u>743</u>	<b>30.8</b>	742	30.8
450.soplex	2	1127	14.8	1128	14.8	<u>1128</u>	<b>14.8</b>	2	<u>1122</u>	<b>14.9</b>	1126	14.8	1118	14.9
453.povray	2	<u>415</u>	<b>25.7</b>	415	25.6	414	25.7	2	319	33.4	318	33.5	<u>318</u>	<b>33.4</b>
454.calculix	2	<u>838</u>	<b>19.7</b>	848	19.5	836	19.7	2	813	20.3	829	19.9	<u>827</u>	<b>20.0</b>
459.GemsFDTD	2	1615	13.1	<u>1607</u>	<b>13.2</b>	1605	13.2	2	1623	13.1	<u>1620</u>	<b>13.1</b>	1617	13.1
465.tonto	2	1146	17.2	1107	17.8	<u>1124</u>	<b>17.5</b>	2	1114	17.7	<u>1108</u>	<b>17.8</b>	1071	18.4
470.lbm	2	2327	11.8	2283	12.0	<u>2286</u>	<b>12.0</b>	2	2301	11.9	<u>2300</u>	<b>11.9</b>	2285	12.0
481.wrf	2	<u>1057</u>	<b>21.1</b>	1066	21.0	1041	21.5	2	1070	20.9	1068	20.9	<u>1070</u>	<b>20.9</b>
482.sphinx3	2	1939	20.1	1819	21.4	<u>1834</u>	<b>21.3</b>	2	<u>1813</u>	<b>21.5</b>	1920	20.3	1771	22.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Environment stack size set to 'unlimited'  
'/usr/bin/taskset' used to bind processes to CPUs

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale T820  
(Intel Xeon processor 3040, 1.86GHz)

**SPECfp\_rate2006 = 19.7**

**SPECfp\_rate\_base2006 = 19.4**

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: May-2007

Hardware Availability: Mar-2007

Software Availability: Dec-2006

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-fast

C++ benchmarks:  
-fast

Fortran benchmarks:  
-fast

Benchmarks using both Fortran and C:  
-fast

## Peak Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale T820  
(Intel Xeon processor 3040, 1.86GHz)

**SPECfp\_rate2006 = 19.7**

**SPECfp\_rate\_base2006 = 19.4**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test date:** May-2007

**Hardware Availability:** Mar-2007

**Software Availability:** Dec-2006

## Peak Compiler Invocation (Continued)

C++ benchmarks:

`icpc`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`icc ifort`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

`-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32`

C++ benchmarks:

`-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32`

Fortran benchmarks:

`-prof_gen(pass 1) -prof_use(pass 2) -fast`

Benchmarks using both Fortran and C:

`-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32`

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/EM64T\\_Intel91\\_flags.html](http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/EM64T\\_Intel91\\_flags.xml](http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 11:25:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 June 2007.