



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX600 S3, Intel Xeon processor 7110M, 2.60 GHz

SPECfp®_rate2006 = 44.0

SPECfp_rate_base2006 = 43.0

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2007

Hardware Availability: Aug-2006

Software Availability: Mar-2007

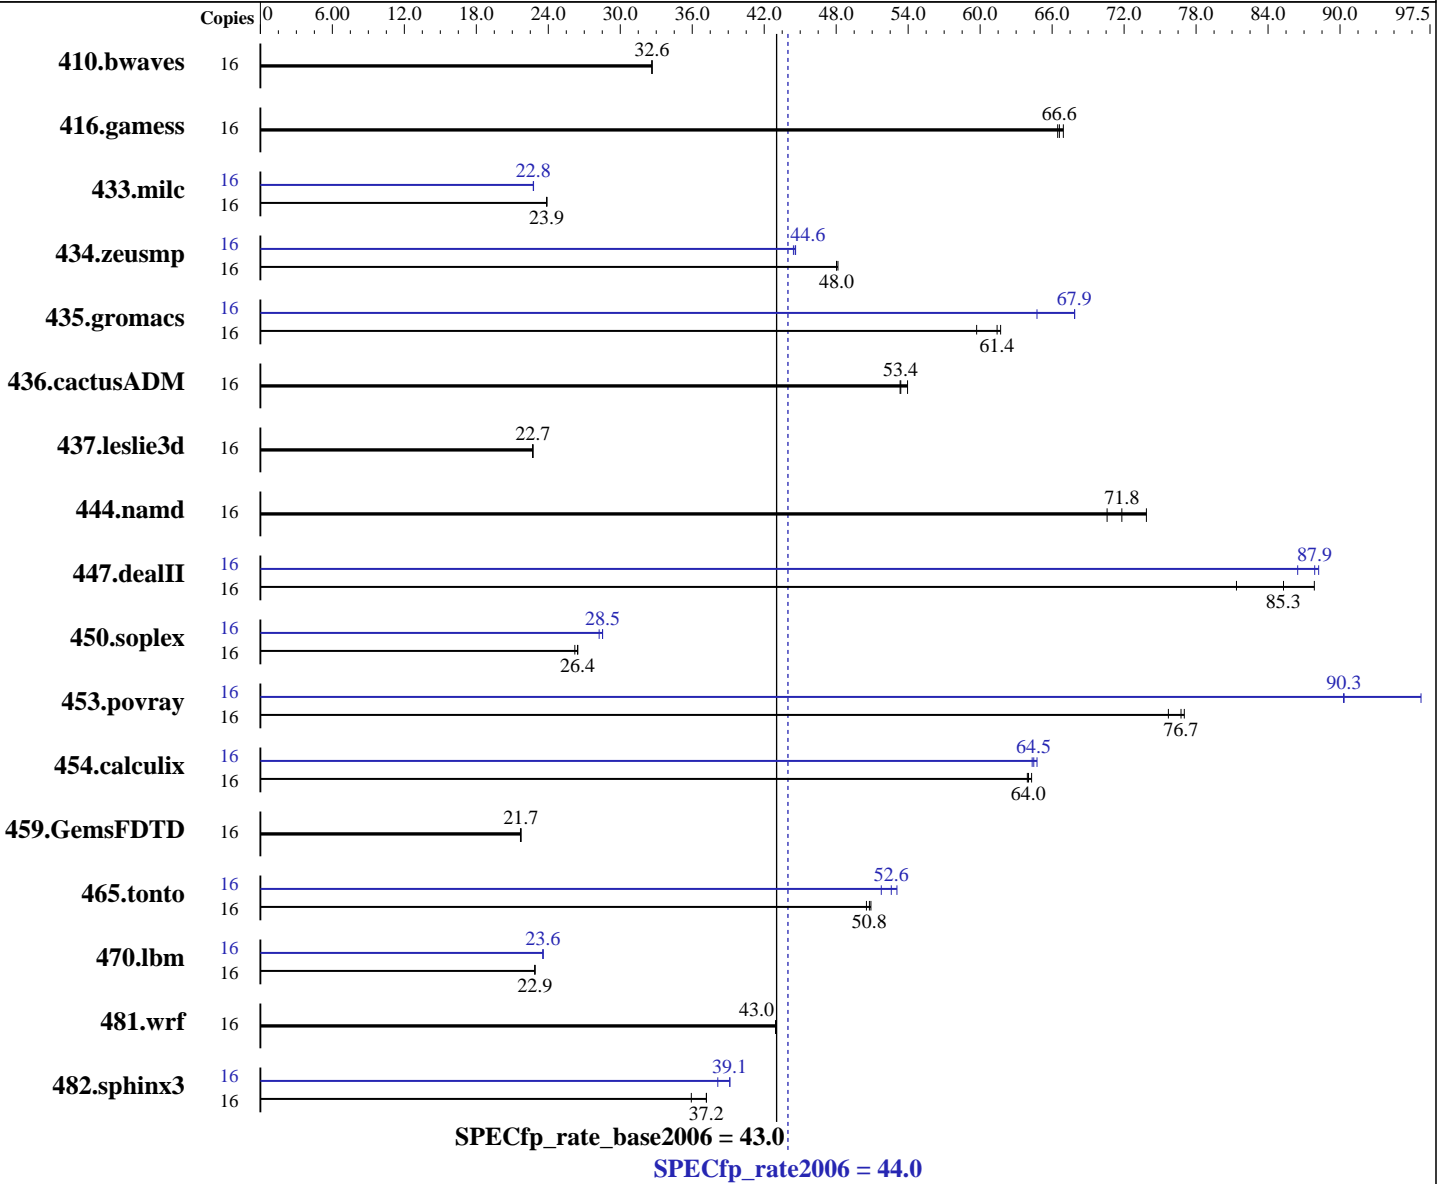

Hardware

CPU Name: Intel Xeon 7110M
 CPU Characteristics: 800 MHz system bus
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2,4 chips
 Primary Cache: 12 K micro-ops I + 16 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86_64
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package-ID: l_cc_p_9.1.047
 Intel Fortran Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package ID: l_fc_p_9.1.043
 Auto Parallel: No
 File System: ReiserFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX600 S3, Intel Xeon processor 7110M,
2.60 GHz

SPECfp_rate2006 = 44.0

SPECfp_rate_base2006 = 43.0

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2007

Hardware Availability: Aug-2006

Software Availability: Mar-2007

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (16x2 GB DDR2 PC2-3200R, 1 rank, CAS 3-3-3, with ECC)
Disk Subsystem: Seagate ST973401SS (SAS 73GB 10 krpm)
Other Hardware: None

System State: Multiuser, Runlevel 3
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	6661	32.6	6660	32.6	6661	32.6	16	6661	32.6	6660	32.6	6661	32.6		
416.gamess	16	4714	66.5	4680	66.9	4704	66.6	16	4714	66.5	4680	66.9	4704	66.6		
433.milc	16	6154	23.9	6151	23.9	6153	23.9	16	6450	22.8	6453	22.8	6455	22.8		
434.zeusmp	16	3032	48.0	3024	48.1	3031	48.0	16	3263	44.6	3266	44.6	3277	44.4		
435.gromacs	16	1860	61.4	1913	59.7	1851	61.7	16	1683	67.9	1765	64.7	1683	67.9		
436.cactusADM	16	3582	53.4	3544	53.9	3585	53.3	16	3582	53.4	3544	53.9	3585	53.3		
437.leslie3d	16	6620	22.7	6629	22.7	6619	22.7	16	6620	22.7	6629	22.7	6619	22.7		
444.namd	16	1737	73.9	1818	70.6	1787	71.8	16	1737	73.9	1818	70.6	1787	71.8		
447.dealII	16	2250	81.4	2146	85.3	2083	87.9	16	2083	87.9	2117	86.5	2075	88.2		
450.soplex	16	5091	26.2	5043	26.5	5047	26.4	16	4725	28.2	4678	28.5	4678	28.5		
453.povray	16	1105	77.0	1125	75.7	1109	76.7	16	880	96.8	943	90.3	942	90.3		
454.calculix	16	2065	63.9	2053	64.3	2062	64.0	16	2047	64.5	2052	64.3	2039	64.7		
459.GemsFDTD	16	7814	21.7	7830	21.7	7818	21.7	16	7814	21.7	7830	21.7	7818	21.7		
465.tonto	16	3093	50.9	3116	50.5	3101	50.8	16	2967	53.1	2994	52.6	3042	51.8		
470.lbm	16	9605	22.9	9609	22.9	9607	22.9	16	9329	23.6	9330	23.6	9334	23.6		
481.wrf	16	4160	43.0	4160	43.0	4162	42.9	16	4160	43.0	4160	43.0	4162	42.9		
482.sphinx3	16	8681	35.9	8386	37.2	8389	37.2	16	8178	38.1	7968	39.1	7970	39.1		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs

General Notes

The system bus runs at 800 MHz

All binaries were built with 64-bit Intel compiler except:
433.milc, 434.zeusmp, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with
32-bit Intel compiler by changing the path for include and library files.

BIOS configuration:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX600 S3, Intel Xeon processor 7110M,
2.60 GHz

SPECfp_rate2006 = 44.0

SPECfp_rate_base2006 = 43.0

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2007

Hardware Availability: Aug-2006

Software Availability: Mar-2007

General Notes (Continued)

Hardware Prefetch = Enable

This result was measured on the PRIMERGY RX600 S3.
The PRIMERGY RX600 S3 and the PRIMERGY TX600 S3 are electronically equivalent.

For information about Fujitsu Siemens Computers in your country please see:
<http://www.fujitsu-siemens.com/countries>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

-fast

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX600 S3, Intel Xeon processor 7110M,
2.60 GHz

SPECfp_rate2006 = 44.0

SPECfp_rate_base2006 = 43.0

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2007

Hardware Availability: Aug-2006

Software Availability: Mar-2007

Base Optimization Flags (Continued)

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

Peak Compiler Invocation

C benchmarks:

/opt/intel/cc/9.1.047/bin/icc -I/opt/intel/cc/9.1.047/include
-L/opt/intel/cc/9.1.047/lib

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/9.1.047/bin/icpc
-I/opt/intel/cc/9.1.047/include -L/opt/intel/cc/9.1.047/lib

Fortran benchmarks (except as noted below):

ifort

434.zeusmp: /opt/intel/fc/9.1.043/bin/ifort
-I/opt/intel/fc/9.1.043/include -L/opt/intel/fc/9.1.043/lib

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX600 S3, Intel Xeon processor 7110M,
2.60 GHz

SPECfp_rate2006 = 44.0

SPECfp_rate_base2006 = 43.0

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2007

Hardware Availability: Aug-2006

Software Availability: Mar-2007

Peak Optimization Flags

C benchmarks:

433.milc: -prof_gen(pass 1) -prof_use(pass 2) -fast

470.lbm: Same as 433.milc

482.sphinx3: -fast

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -prof_gen(pass 1) -prof_use(pass 2) -fast

450.soplex: Same as 447.dealII

453.povray: Same as 447.dealII

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -prof_gen(pass 1) -prof_use(pass 2) -fast

Benchmarks using both Fortran and C:

435.gromacs: -prof_gen(pass 1) -prof_use(pass 2) -fast

436.cactusADM: basepeak = yes

454.calculix: Same as 435.gromacs

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.xml



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX600 S3, Intel Xeon processor 7110M,
2.60 GHz

SPECfp_rate2006 = 44.0

SPECfp_rate_base2006 = 43.0

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2007

Hardware Availability: Aug-2006

Software Availability: Mar-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:22:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 June 2007.