



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint®2006 = 11.4**

**IBM System x3455 (AMD Opteron 2214)**

**SPECint\_base2006 = 10.4**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2007

Hardware Availability: Oct-2006

Software Availability: Mar-2007

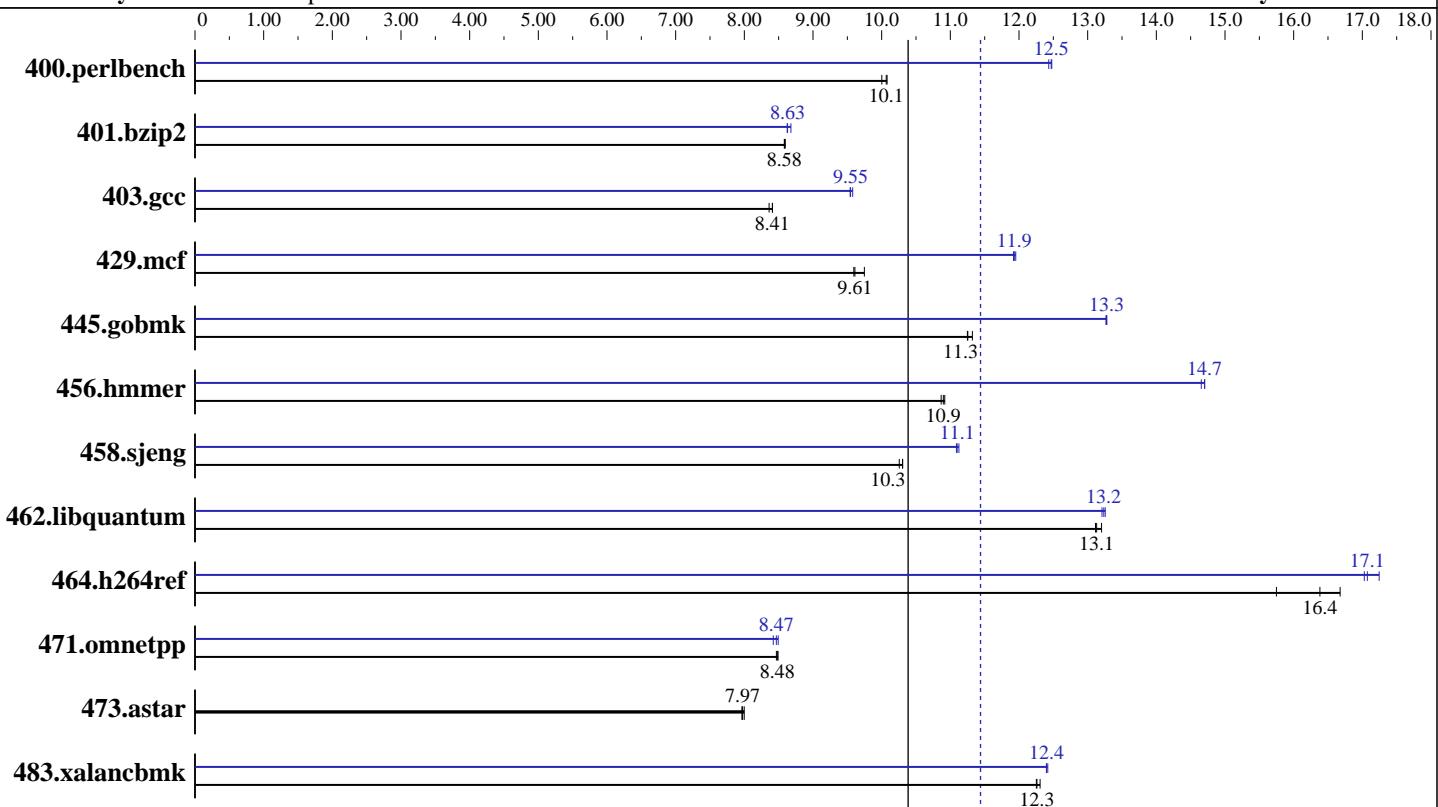

**SPECint\_base2006 = 10.4**

**SPECint2006 = 11.4**

## Hardware

CPU Name:	AMD Opteron 2214
CPU Characteristics:	
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1, 2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2GB DDR2-5300 ECC)
Disk Subsystem:	1 x 160 GB Serial ATA, 7200 RPM
Other Hardware:	None

## Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	QLogic PathScale Compiler Suite, Release 3.0
Auto Parallel:	No
File System:	ext3
System State:	Multi-user, run level 3
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint2006 = 11.4**

IBM System x3455 (AMD Opteron 2214)

**SPECint\_base2006 = 10.4**

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	977	10.0	969	10.1	<b>971</b>	<b>10.1</b>	786	12.4	783	12.5	<b>784</b>	<b>12.5</b>
401.bzip2	1123	8.60	1124	8.58	<b>1124</b>	<b>8.58</b>	1112	8.68	<b>1118</b>	<b>8.63</b>	1119	8.62
403.gcc	<b>957</b>	<b>8.41</b>	957	8.41	963	8.36	840	9.58	844	9.54	<b>843</b>	<b>9.55</b>
429.mcf	936	9.75	<b>949</b>	<b>9.61</b>	951	9.59	763	12.0	765	11.9	<b>764</b>	<b>11.9</b>
445.gobmk	927	11.3	<b>932</b>	<b>11.3</b>	933	11.2	<b>790</b>	<b>13.3</b>	790	13.3	791	13.3
456.hammer	859	10.9	<b>856</b>	<b>10.9</b>	854	10.9	<b>635</b>	<b>14.7</b>	637	14.7	635	14.7
458.sjeng	<b>1174</b>	<b>10.3</b>	1180	10.3	1174	10.3	1088	11.1	1091	11.1	<b>1090</b>	<b>11.1</b>
462.libquantum	1580	13.1	<b>1578</b>	<b>13.1</b>	1569	13.2	1563	13.3	1569	13.2	<b>1566</b>	<b>13.2</b>
464.h264ref	1405	15.7	1327	16.7	<b>1351</b>	<b>16.4</b>	1300	17.0	<b>1296</b>	<b>17.1</b>	1283	17.2
471.omnetpp	736	8.49	<b>737</b>	<b>8.48</b>	738	8.47	736	8.49	<b>738</b>	<b>8.47</b>	742	8.42
473.astar	878	8.00	881	7.96	<b>880</b>	<b>7.97</b>	878	8.00	881	7.96	<b>880</b>	<b>7.97</b>
483.xalancbmk	561	12.3	<b>563</b>	<b>12.3</b>	563	12.3	556	12.4	<b>556</b>	<b>12.4</b>	557	12.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

taskset utility used to bind CPU(s) to processes

## Base Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint2006 = 11.4**

IBM System x3455 (AMD Opteron 2214)

**SPECint\_base2006 = 10.4**

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

## Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc\_alg=1

C++ benchmarks:

-Ofast -m32 -L/tools/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

-IPA:max\_jobs=2

C++ benchmarks:

-IPA:max\_jobs=2

## Peak Compiler Invocation

C benchmarks:

pathcc

C++ benchmarks:

pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hammer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:opt=0

401.bzip2: -O3 -LNO:ou\_prod\_max=10 -OPT:Ofast -OPT:alias=disjoint

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint2006 = 11.4**

**IBM System x3455 (AMD Opteron 2214)**

**SPECint\_base2006 = 10.4**

**CPU2006 license:** 11

**Test date:** Aug-2007

**Test sponsor:** IBM Corporation

**Hardware Availability:** Oct-2006

**Tested by:** IBM Corporation

**Software Availability:** Mar-2007

## Peak Optimization Flags (Continued)

403.gcc: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O3  
-OPT:Ofast

429.mcf: -m32 -O3 -ipa -L/tools/SmartHeap\_8.1/lib -lsmartheap

445.gobmk: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off  
-WOPT:retype\_expr=on

456.hmmr: -O2 -OPT:alias=disjoint -OPT:malloc\_alg=1 -CG:cflow=0

458.sjeng: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:plimit=50000 -IPA:pu\_reorder=2

462.libquantum: -O3 -ipa -CG:local\_fwd\_sched=on -IPA:space=1000

464.h264ref: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0

C++ benchmarks:

471.omnetpp: -Ofast -CG:gcm=off -m32  
-L/tools/SmartHeap\_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -Ofast -m32 -OPT:unroll\_times\_max=8  
-L/tools/SmartHeap\_8.1/lib -lsmartheap

## Peak Other Flags

C benchmarks:

-IPA:max\_jobs=2

C++ benchmarks:

-IPA:max\_jobs=2

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.13.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.13.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.xml)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint2006 = 11.4**

IBM System x3455 (AMD Opteron 2214)

**SPECint\_base2006 = 10.4**

**CPU2006 license:** 11

**Test date:** Aug-2007

**Test sponsor:** IBM Corporation

**Hardware Availability:** Oct-2006

**Tested by:** IBM Corporation

**Software Availability:** Mar-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 13:05:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 September 2007.