



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp®\_rate2006 = 24.5

ProLiant DL380 G5  
(2.33 GHz, Intel Xeon processor 5140)

SPECfp\_rate\_base2006 = 22.5

CPU2006 license: 3


Test date: Sep-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

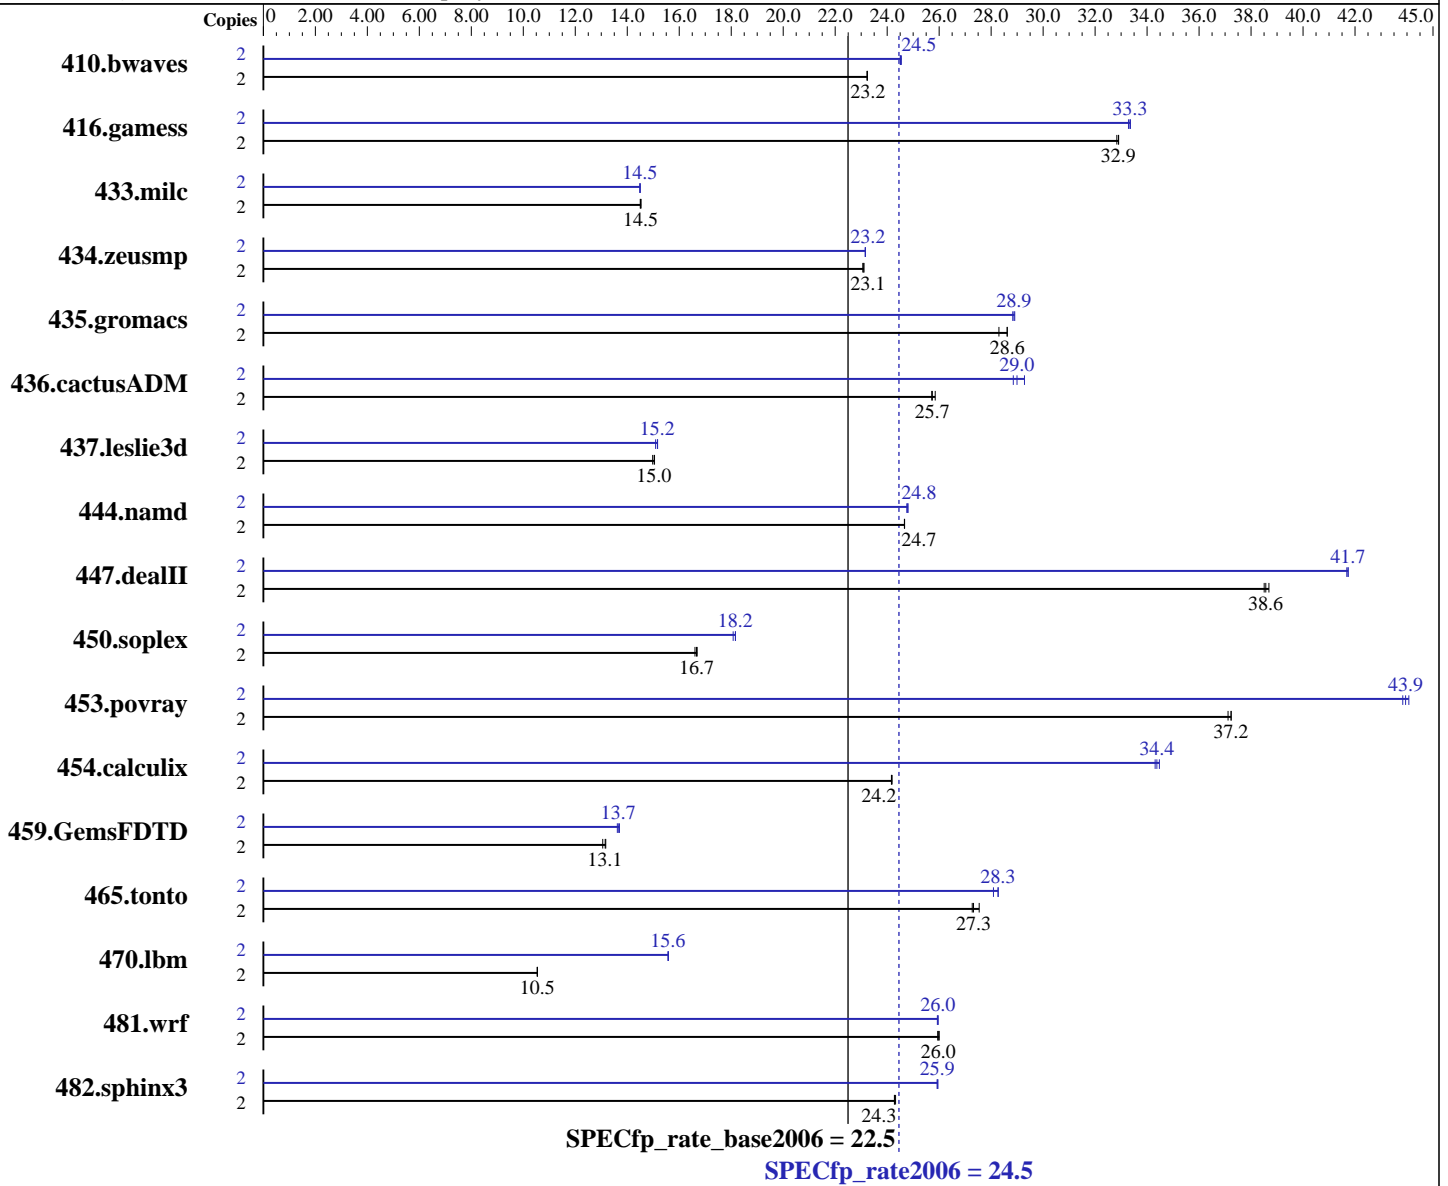

### Hardware

CPU Name: Intel Xeon 5140  
 CPU Characteristics: 2.33 GHz, 2x4 MB L2 shared, 1333 MHz system bus  
 CPU MHz: 2333  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 or 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip

Continued on next page

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1 kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725  
 Auto Parallel: No  
 File System: ext2  
 System State: Multi-user run level 3  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 24.5

ProLiant DL380 G5  
(2.33 GHz, Intel Xeon processor 5140)

SPECfp\_rate\_base2006 = 22.5

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Sep-2007  
Hardware Availability: Jun-2006  
Software Availability: Nov-2007

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (8x1 GB PC2-5300F CL5)  
Disk Subsystem: 1x72 GB 10 K SAS  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: binutils-2.17.50

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	1170	23.2	<u>1170</u>	<u>23.2</u>	1170	23.2	2	<u>1109</u>	<u>24.5</u>	1109	24.5	1107	24.5
416.gamess	2	1190	32.9	<u>1190</u>	<u>32.9</u>	1193	32.8	2	1174	33.4	1177	33.3	<u>1175</u>	<u>33.3</u>
433.milc	2	1266	14.5	<u>1265</u>	<u>14.5</u>	1263	14.5	2	1268	14.5	<u>1267</u>	<u>14.5</u>	1266	14.5
434.zeusmp	2	789	23.1	<u>788</u>	<u>23.1</u>	788	23.1	2	786	23.2	786	23.2	<u>786</u>	<u>23.2</u>
435.gromacs	2	499	28.6	<u>499</u>	<u>28.6</u>	505	28.3	2	<u>494</u>	<u>28.9</u>	494	28.9	495	28.8
436.cactusADM	2	925	25.8	<u>929</u>	<u>25.7</u>	929	25.7	2	828	28.9	816	29.3	<u>824</u>	<u>29.0</u>
437.leslie3d	2	1249	15.0	1255	15.0	<u>1250</u>	<u>15.0</u>	2	<u>1240</u>	<u>15.2</u>	1240	15.2	1246	15.1
444.namd	2	<u>650</u>	<u>24.7</u>	650	24.7	650	24.7	2	648	24.8	647	24.8	<u>647</u>	<u>24.8</u>
447.dealII	2	<u>593</u>	<u>38.6</u>	591	38.7	594	38.5	2	549	41.7	548	41.7	<u>548</u>	<u>41.7</u>
450.soplex	2	1004	16.6	<u>1001</u>	<u>16.7</u>	999	16.7	2	923	18.1	918	18.2	<u>918</u>	<u>18.2</u>
453.povray	2	<u>286</u>	<u>37.2</u>	287	37.1	286	37.2	2	<u>242</u>	<u>43.9</u>	241	44.1	243	43.8
454.calculix	2	682	24.2	683	24.2	<u>683</u>	<u>24.2</u>	2	479	34.5	481	34.3	<u>480</u>	<u>34.4</u>
459.GemsFDTD	2	<u>1614</u>	<u>13.1</u>	1625	13.1	1611	13.2	2	1549	13.7	1558	13.6	<u>1554</u>	<u>13.7</u>
465.tonto	2	715	27.5	722	27.3	<u>720</u>	<u>27.3</u>	2	696	28.3	701	28.1	<u>696</u>	<u>28.3</u>
470.lbm	2	2606	10.5	<u>2607</u>	<u>10.5</u>	2608	10.5	2	1763	15.6	1765	15.6	<u>1765</u>	<u>15.6</u>
481.wrf	2	859	26.0	<u>860</u>	<u>26.0</u>	861	25.9	2	<u>861</u>	<u>26.0</u>	862	25.9	861	26.0
482.sphinx3	2	1603	24.3	1606	24.3	<u>1605</u>	<u>24.3</u>	2	1502	26.0	1504	25.9	<u>1503</u>	<u>25.9</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 200M

## Platform Notes

BIOS configuration:  
Power Regulator set to Static High Performance Mode



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 24.5**

ProLiant DL380 G5  
(2.33 GHz, Intel Xeon processor 5140)

**SPECfp\_rate\_base2006 = 22.5**

**CPU2006 license:** 3

**Test date:** Sep-2007

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2006

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2007

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECfp\_rate2006 = 24.5**

ProLiant DL380 G5  
(2.33 GHz, Intel Xeon processor 5140)

**SPECfp\_rate\_base2006 = 22.5**

**CPU2006 license:** 3

**Test date:** Sep-2007

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2006

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2007

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 24.5

ProLiant DL380 G5  
(2.33 GHz, Intel Xeon processor 5140)

SPECfp\_rate\_base2006 = 22.5

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2007

Hardware Availability: Jun-2006

Software Availability: Nov-2007

## Peak Optimization Flags (Continued)

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

ProLiant DL380 G5  
(2.33 GHz, Intel Xeon processor 5140)

**SPECfp\_rate2006 = 24.5**

**SPECfp\_rate\_base2006 = 22.5**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2007

**Hardware Availability:** Jun-2006

**Software Availability:** Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 14:50:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 October 2007.