



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 16.5

IBM BladeCenter HS21 (Intel Xeon E5335)

SPECfp_base2006 = 14.2

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2007

Hardware Availability: Feb-2007

Software Availability: Nov-2007

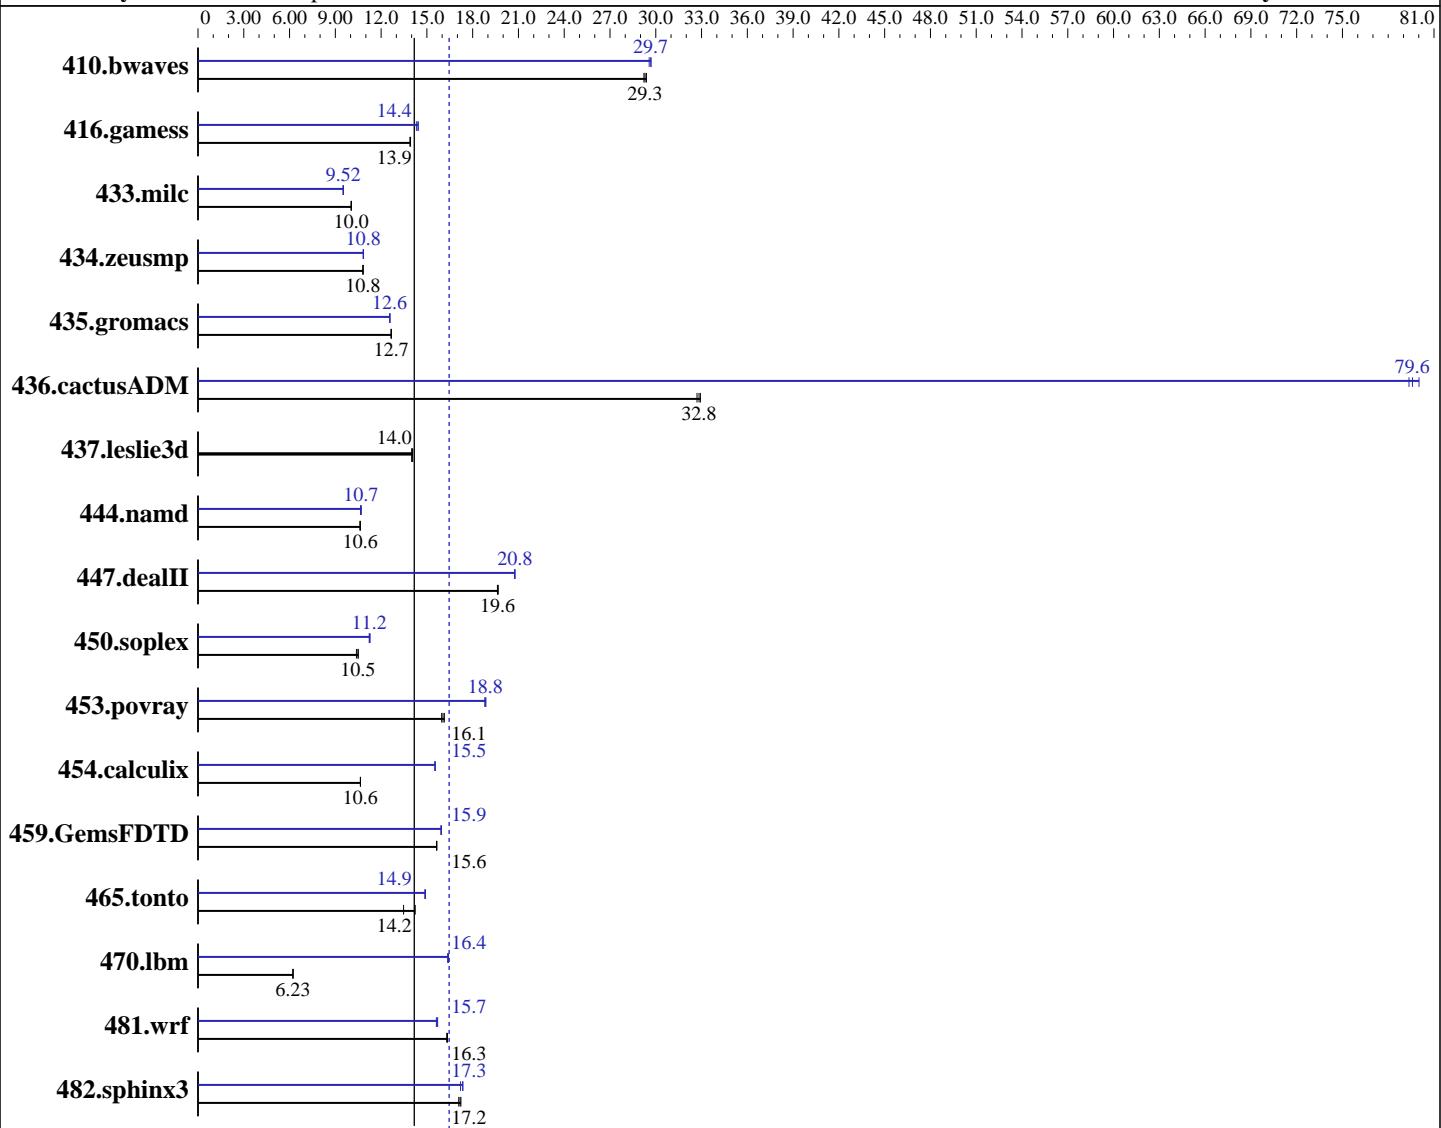

Hardware

CPU Name: Intel Xeon E5335
CPU Characteristics: 1333MHz system bus
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Software

Operating System: SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler: Intel C++ and Fortran Compiler for Linux version 10.1 Build 20070824
Auto Parallel: Yes
File System: ReiserFS
System State: Multi-user, run level 3
Base Pointers: 64-bit
Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.5

IBM BladeCenter HS21 (Intel Xeon E5335)

SPECfp_base2006 = 14.2

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
 Disk Subsystem: 1 x 36 GB SAS, 10000 RPM
 Other Hardware: Memory and I/O Expansion Unit (P/N 42C1600)

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	462	29.4	465	29.2	464	29.3	458	29.7	460	29.6	458	29.7
416.gamess	1409	13.9	1406	13.9	1408	13.9	1358	14.4	1368	14.3	1357	14.4
433.milc	914	10.0	914	10.0	914	10.0	963	9.53	964	9.52	966	9.51
434.zeusmp	841	10.8	841	10.8	842	10.8	840	10.8	839	10.8	840	10.8
435.gromacs	564	12.6	563	12.7	563	12.7	568	12.6	568	12.6	568	12.6
436.cactusADM	365	32.7	364	32.8	363	32.9	150	79.6	149	80.0	151	79.4
437.leslie3d	668	14.1	670	14.0	671	14.0	668	14.1	670	14.0	671	14.0
444.namd	755	10.6	754	10.6	754	10.6	750	10.7	750	10.7	753	10.7
447.dealII	582	19.6	582	19.7	583	19.6	551	20.8	551	20.8	551	20.8
450.soplex	794	10.5	803	10.4	795	10.5	743	11.2	739	11.3	743	11.2
453.povray	331	16.1	333	16.0	330	16.1	283	18.8	283	18.8	282	18.9
454.calculix	775	10.6	775	10.6	775	10.6	531	15.5	531	15.5	531	15.5
459.GemsFDTD	678	15.6	679	15.6	678	15.6	665	15.9	667	15.9	665	15.9
465.tonto	730	13.5	693	14.2	692	14.2	661	14.9	660	14.9	662	14.9
470.lbm	2205	6.23	2210	6.22	2207	6.23	839	16.4	839	16.4	837	16.4
481.wrf	685	16.3	683	16.3	684	16.3	713	15.7	715	15.6	711	15.7
482.sphinx3	1141	17.1	1135	17.2	1131	17.2	1124	17.3	1123	17.4	1133	17.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to physical,0
 KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
 icc

C++ benchmarks:
 icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.5

IBM BladeCenter HS21 (Intel Xeon E5335)

SPECfp_base2006 = 14.2

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -parallel

C++ benchmarks:

-fast -parallel

Fortran benchmarks:

-fast -parallel

Benchmarks using both Fortran and C:

-fast -parallel

Peak Compiler Invocation

C benchmarks (except as noted below):

/home/cmpllr/usr3/alrahate/compilers/icl0.1mainline/20070824/Linux32/bin/icc
-L/home/cmpllr/usr3/alrahate/compilers/icl0.1mainline/20070824/Linux32/lib

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.5

IBM BladeCenter HS21 (Intel Xeon E5335)

SPECfp_base2006 = 14.2

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Compiler Invocation (Continued)

C benchmarks (except as noted below) (continued):

-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/bin/icpc
 -L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/lib
 -I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/include

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
 -auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12
 -scalar-rep -prefetch -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.5

IBM BladeCenter HS21 (Intel Xeon E5335)

SPECfp_base2006 = 14.2

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll12

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.22.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.22.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.5

IBM BladeCenter HS21 (Intel Xeon E5335)

SPECfp_base2006 = 14.2

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:44:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 November 2007.