



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro Motherboard H8DMU+

SPECfp<sup>®</sup>\_rate2006 = 47.7

SPECfp\_rate\_base2006 = 45.0

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2007

Hardware Availability: Jul-2007

Software Availability: Feb-2007

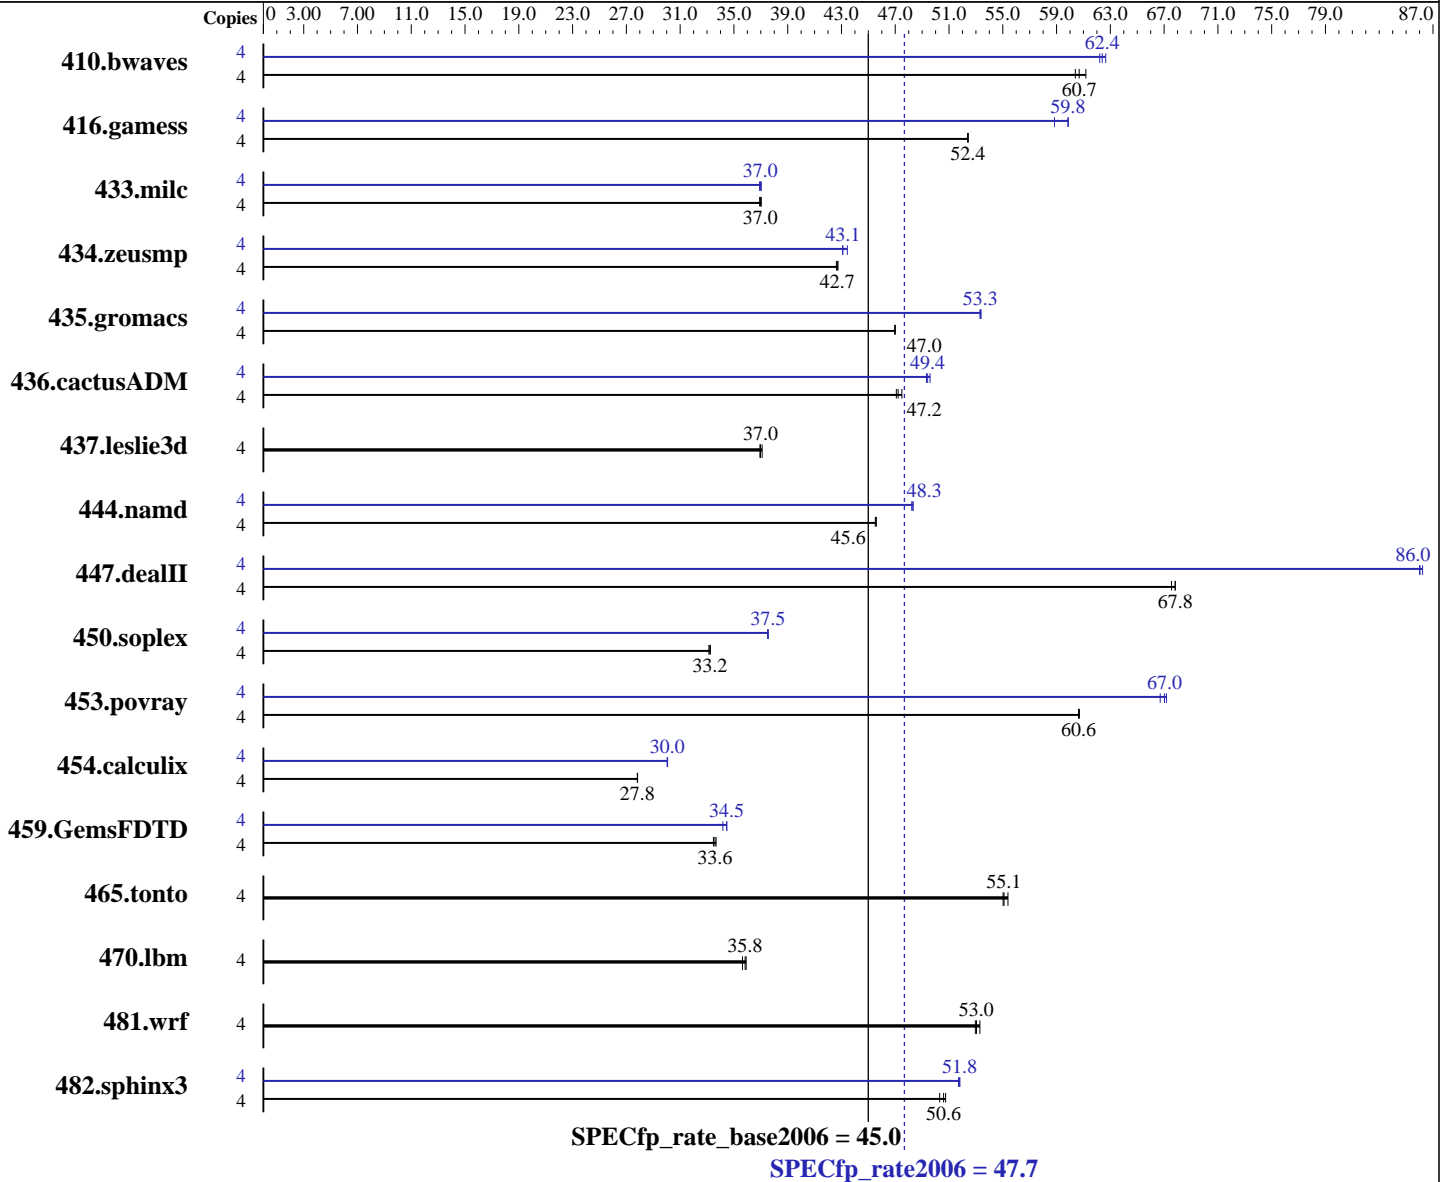

### Hardware

CPU Name: AMD Opteron 2218  
 CPU Characteristics:  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, kernel 2.6.16.46-0.12-default  
 Compiler: QLogic PathScale Compiler Suite, Release 3.0  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Multi-user, run level 3  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro Motherboard H8DMU+

SPECfp\_rate2006 = **47.7**  
SPECfp\_rate\_base2006 = 45.0

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2007  
Hardware Availability: Jul-2007  
Software Availability: Feb-2007

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8x2GB, DDR2-667 CL5 ECC Reg Dual Rank)  
Disk Subsystem: SATA, 250 GB  
Other Hardware: None

Other Software: None

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	889	61.2	<b>896</b>	<b>60.7</b>	900	60.4	4	874	62.2	868	62.7	<b>871</b>	<b>62.4</b>
416.gamess	4	1494	52.4	1495	52.4	<b>1494</b>	<b>52.4</b>	4	<b>1309</b>	<b>59.8</b>	1331	58.8	1308	59.9
433.milc	4	995	36.9	991	37.0	<b>993</b>	<b>37.0</b>	4	995	36.9	991	37.0	<b>993</b>	<b>37.0</b>
434.zeusmp	4	852	42.7	854	42.6	<b>853</b>	<b>42.7</b>	4	<b>845</b>	<b>43.1</b>	838	43.4	845	43.1
435.gromacs	4	608	47.0	<b>608</b>	<b>47.0</b>	608	47.0	4	<b>536</b>	<b>53.3</b>	536	53.3	535	53.4
436.cactusADM	4	1015	47.1	1006	47.5	<b>1012</b>	<b>47.2</b>	4	<b>967</b>	<b>49.4</b>	969	49.3	964	49.6
437.leslie3d	4	1013	37.1	1018	36.9	<b>1017</b>	<b>37.0</b>	4	1013	37.1	1018	36.9	<b>1017</b>	<b>37.0</b>
444.namd	4	<b>704</b>	<b>45.6</b>	704	45.6	705	45.5	4	664	48.3	665	48.2	<b>664</b>	<b>48.3</b>
447.dealII	4	675	67.8	677	67.5	<b>675</b>	<b>67.8</b>	4	531	86.2	532	86.0	<b>532</b>	<b>86.0</b>
450.soplex	4	1007	33.1	<b>1005</b>	<b>33.2</b>	1003	33.2	4	889	37.5	<b>889</b>	<b>37.5</b>	888	37.6
453.povray	4	351	60.6	351	60.7	<b>351</b>	<b>60.6</b>	4	317	67.2	<b>317</b>	<b>67.0</b>	319	66.7
454.calculix	4	<b>1186</b>	<b>27.8</b>	1186	27.8	1186	27.8	4	1098	30.1	1098	30.0	<b>1098</b>	<b>30.0</b>
459.GemsFDTD	4	1268	33.5	1260	33.7	<b>1263</b>	<b>33.6</b>	4	1231	34.5	1242	34.2	<b>1231</b>	<b>34.5</b>
465.tonto	4	711	55.4	<b>714</b>	<b>55.1</b>	715	55.0	4	711	55.4	<b>714</b>	<b>55.1</b>	715	55.0
470.lbm	4	1542	35.6	<b>1534</b>	<b>35.8</b>	1530	35.9	4	1542	35.6	<b>1534</b>	<b>35.8</b>	1530	35.9
481.wrf	4	<b>842</b>	<b>53.0</b>	838	53.3	844	53.0	4	<b>842</b>	<b>53.0</b>	838	53.3	844	53.0
482.sphinx3	4	<b>1541</b>	<b>50.6</b>	1536	50.7	1550	50.3	4	1508	51.7	<b>1505</b>	<b>51.8</b>	1505	51.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### General Notes

taskset utility used to bind CPU(s) to processes  
All memory slots filled on all chips  
Tested systems can be used with CSE-825TQ-R700LPV case,  
To ensure system stability, a 550W (minimum) ATX power supply  
[4-pin (+12V), 8-pin (+12V) and 24-pin are required]  
Product description located as of  
<http://www.supermicro.com/Aplus/motherboard/Opteron2000/MCP55/H8DMU+.cfm>

### Base Compiler Invocation

C benchmarks:  
pathcc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro  
Motherboard H8DMU+

SPECfp\_rate2006 = 47.7

SPECfp\_rate\_base2006 = 45.0

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2007  
Hardware Availability: Jul-2007  
Software Availability: Feb-2007

## Base Compiler Invocation (Continued)

C++ benchmarks:  
pathCC

Fortran benchmarks:  
pathf95

Benchmarks using both Fortran and C:  
pathcc pathf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-Ofast

C++ benchmarks:  
-Ofast

Fortran benchmarks:  
-Ofast -OPT:malloc\_alg=1

Benchmarks using both Fortran and C:  
-Ofast -OPT:malloc\_alg=1



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Supermicro  
Motherboard H8DMU+**

**SPECfp\_rate2006 = 47.7**

**SPECfp\_rate\_base2006 = 45.0**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Oct-2007  
**Hardware Availability:** Jul-2007  
**Software Availability:** Feb-2007

## Peak Compiler Invocation

C benchmarks:  
pathcc  
  
C++ benchmarks:  
pathCC  
  
Fortran benchmarks:  
pathf95  
  
Benchmarks using both Fortran and C:  
pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:  
  
433.milc: -Ofast -CG:cflow=off -LNO:prefetch=1 -OPT:malloc\_alg=1  
  
470.lbm: basepeak = yes  
  
482.sphinx3: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:Ofast -WOPT:aggstr=0 -m32  
  
C++ benchmarks:  
  
444.namd: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-fno-exceptions

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro  
Motherboard H8DMU+

SPECfp\_rate2006 = 47.7

SPECfp\_rate\_base2006 = 45.0

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2007  
Hardware Availability: Jul-2007  
Software Availability: Feb-2007

## Peak Optimization Flags (Continued)

447.dealII: -Ofast -static -INLINE:aggressive=on -OPT:malloc\_alg=1  
-m32 -fno-exceptions

450.soplex: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O3  
-OPT:IEEE\_arith=3 -CG:load\_exe=0 -CG:movnti=1  
-LNO:minvariant=off -LNO:prefetch=1 -fno-exceptions

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-fno-fast-math

### Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:Ofast -OPT:IEEE\_arith=3 -LNO:blocking=off  
-LNO:ignore\_feedback=off

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O2  
-OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256

434.zeusmp: -Ofast -CG:local\_fwd\_sched=on -LNO:blocking=off  
-LNO:interchange=off -LNO:fu=10 -LNO:full\_unroll\_outer=on

437.leslie3d: basepeak = yes

459.GemsFDTD: -Ofast -LNO:fission=2 -LNO:prefetch=0

465.tonto: basepeak = yes

### Benchmarks using both Fortran and C:

435.gromacs: -O3 -OPT:rsqrt=2 -OPT:ro=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-LNO:prefetch=3 -LNO:prefetch\_ahead=5 -LNO:ou\_prod\_max=10  
-LNO:full\_unroll=5 -ipa

454.calculix: -Ofast -LNO:simd=0 -WOPT:mem\_opnds=on

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.06.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.06.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.06.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.06.xml)



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro  
Motherboard H8DMU+

SPECfp\_rate2006 = 47.7

SPECfp\_rate\_base2006 = 45.0

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2007

Hardware Availability: Jul-2007

Software Availability: Feb-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.1.  
Report generated on Tue Sep 13 11:30:38 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 November 2007.