



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S4, Intel Xeon processor E5430,
2.66 GHz

SPECint[®]_rate2006 = 101

SPECint_rate_base2006 = 101

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Oct-2007

Hardware Availability: Dec-2007

Software Availability: Nov-2007

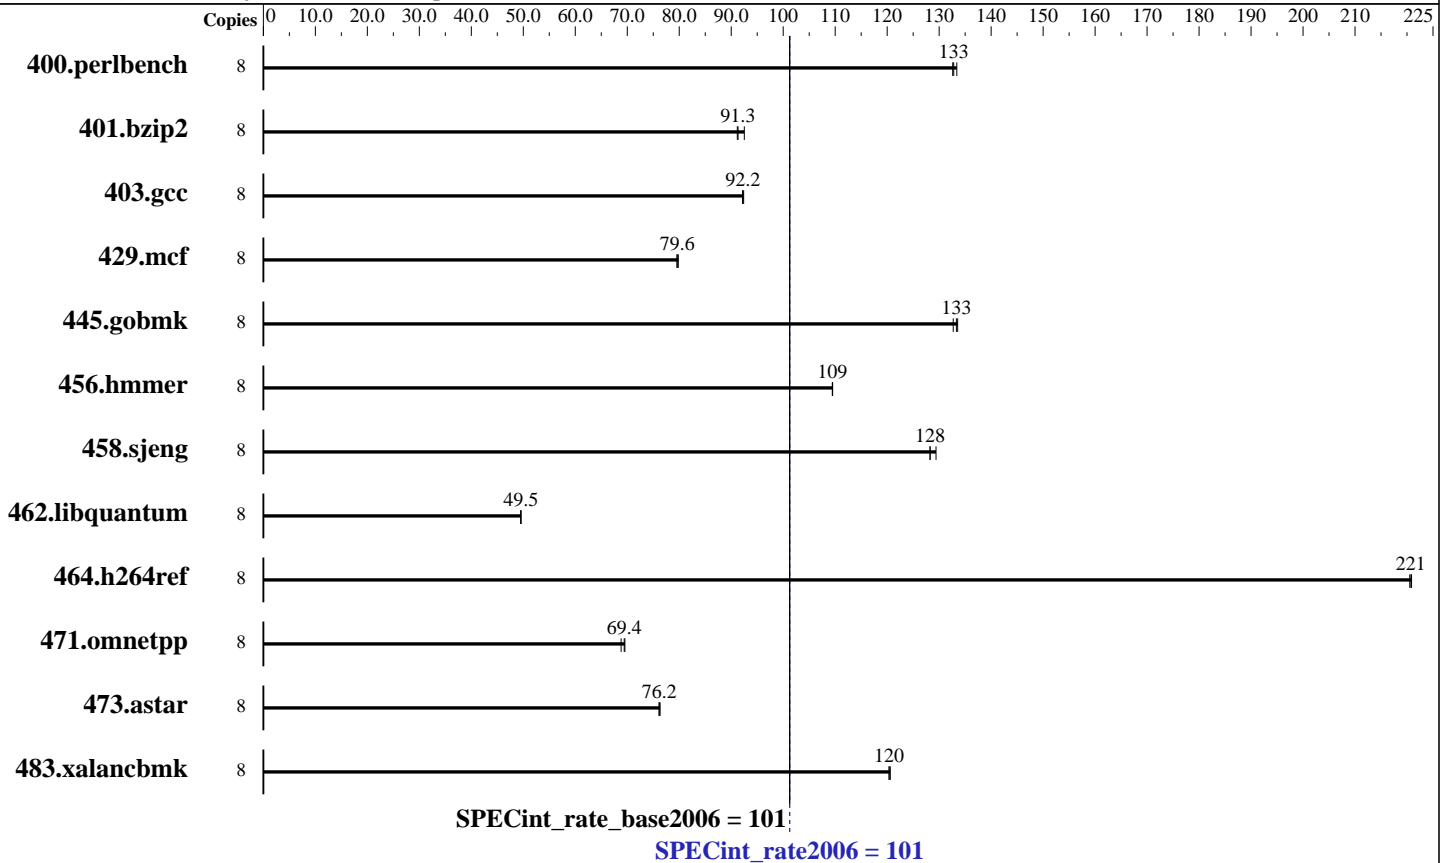

Hardware

CPU Name: Intel Xeon E5430
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
 Disk Subsystem: Seagate ST973451SS (SAS, 73GB, 15000rpm)
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
 Auto Parallel: No
 File System: ext2
 System State: Multiuser, Runlevel 3
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: Smart Heap Library, Version 8.1
 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S4, Intel Xeon processor E5430,
2.66 GHz

SPECint_rate2006 = 101

SPECint_rate_base2006 = 101

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Oct-2007

Hardware Availability: Dec-2007

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	589	133	589	133	586	133	8	589	133	589	133	586	133
401.bzip2	8	847	91.2	834	92.5	845	91.3	8	847	91.2	834	92.5	845	91.3
403.gcc	8	697	92.4	699	92.2	698	92.2	8	697	92.4	699	92.2	698	92.2
429.mcf	8	917	79.6	914	79.8	916	79.6	8	917	79.6	914	79.8	916	79.6
445.gobmk	8	630	133	632	133	628	134	8	630	133	632	133	628	134
456.hammer	8	682	109	682	109	682	110	8	682	109	682	109	682	110
458.sjeng	8	755	128	755	128	748	129	8	755	128	755	128	748	129
462.libquantum	8	3346	49.5	3347	49.5	3346	49.5	8	3346	49.5	3347	49.5	3346	49.5
464.h264ref	8	802	221	802	221	803	221	8	802	221	802	221	803	221
471.omnetpp	8	719	69.5	727	68.8	720	69.4	8	719	69.5	727	68.8	720	69.4
473.astar	8	736	76.3	737	76.2	738	76.1	8	736	76.3	737	76.2	738	76.1
483.xalancbmk	8	459	120	458	121	459	120	8	459	120	458	121	459	120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

This result has been produced with binaries provided and compiled by Intel.

BIOS configuration:

Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:

<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S4, Intel Xeon processor E5430,
2.66 GHz

SPECint_rate2006 = 101

SPECint_rate_base2006 = 101

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Oct-2007

Hardware Availability: Dec-2007

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:

`-fast -inline-calloc -opt-malloc-options=3`

C++ benchmarks:

`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Optimization Flags

C benchmarks:

`400.perlbench: basepeak = yes`

`401.bzip2: basepeak = yes`

`403.gcc: basepeak = yes`

`429.mcf: basepeak = yes`

`445.gobmk: basepeak = yes`

`456.hmmer: basepeak = yes`

`458.sjeng: basepeak = yes`

`462.libquantum: basepeak = yes`

`464.h264ref: basepeak = yes`

C++ benchmarks:

`471.omnetpp: basepeak = yes`

`473.astar: basepeak = yes`

`483.xalancbmk: basepeak = yes`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S4, Intel Xeon processor E5430,
2.66 GHz

SPECint_rate2006 = 101

SPECint_rate_base2006 = 101

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Oct-2007

Hardware Availability: Dec-2007

Software Availability: Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:35:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 November 2007.