



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S4, Intel Xeon processor E5420,
2.50 GHz

SPECint_rate2006 = 97.8

SPECint_rate_base2006 = 97.8

CPU2006 license: 22


Test date: Oct-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

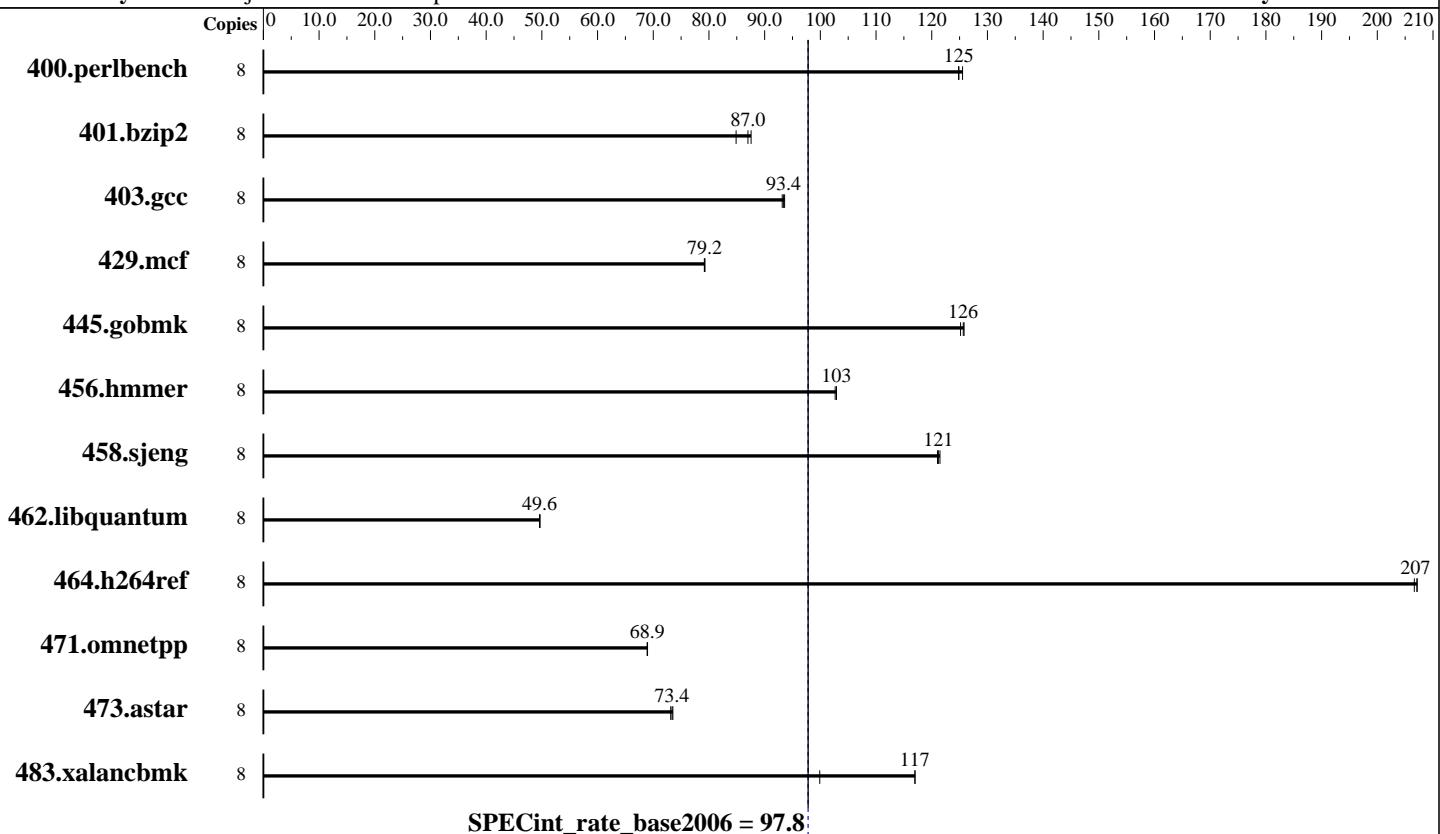

Hardware

CPU Name:	Intel Xeon E5420
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem:	Seagate ST973451SS (SAS, 73GB, 15000rpm)
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
Auto Parallel:	No
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	Smart Heap Library, Version 8.1 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S4, Intel Xeon processor E5420,
2.50 GHz

SPECint_rate2006 = 97.8

SPECint_rate_base2006 = 97.8

CPU2006 license: 22

Test date: Oct-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	623	126	<u>626</u>	<u>125</u>	626	125	8	623	126	<u>626</u>	<u>125</u>	626	125
401.bzip2	8	910	84.9	<u>887</u>	<u>87.0</u>	882	87.6	8	910	84.9	<u>887</u>	<u>87.0</u>	882	87.6
403.gcc	8	688	93.6	691	93.2	<u>690</u>	<u>93.4</u>	8	688	93.6	691	93.2	<u>690</u>	<u>93.4</u>
429.mcf	8	<u>921</u>	<u>79.2</u>	922	79.2	920	79.3	8	<u>921</u>	<u>79.2</u>	922	79.2	920	79.3
445.gobmk	8	667	126	<u>668</u>	<u>126</u>	670	125	8	667	126	<u>668</u>	<u>126</u>	670	125
456.hammer	8	<u>725</u>	<u>103</u>	725	103	727	103	8	<u>725</u>	<u>103</u>	725	103	727	103
458.sjeng	8	800	121	<u>799</u>	<u>121</u>	797	121	8	800	121	<u>799</u>	<u>121</u>	797	121
462.libquantum	8	3340	49.6	<u>3340</u>	<u>49.6</u>	3340	49.6	8	3340	49.6	<u>3340</u>	<u>49.6</u>	3340	49.6
464.h264ref	8	857	207	855	207	<u>855</u>	<u>207</u>	8	857	207	855	207	<u>855</u>	<u>207</u>
471.omnetpp	8	726	68.9	<u>725</u>	<u>68.9</u>	725	69.0	8	726	68.9	<u>725</u>	<u>68.9</u>	725	69.0
473.astar	8	764	73.5	<u>765</u>	<u>73.4</u>	768	73.1	8	764	73.5	<u>765</u>	<u>73.4</u>	768	73.1
483.xalancbmk	8	<u>472</u>	<u>117</u>	553	99.9	472	117	8	<u>472</u>	<u>117</u>	553	99.9	472	117

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

This result has been produced with binaries provided and compiled by Intel.

BIOS configuration:

Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:
 icc

C++ benchmarks:
 icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S4, Intel Xeon processor E5420,
2.50 GHz

SPECint_rate2006 = 97.8

SPECint_rate_base2006 = 97.8

CPU2006 license: 22

Test date: Oct-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:

```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/home/cmpllr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: basepeak = yes
```

```
401.bzip2: basepeak = yes
```

```
403.gcc: basepeak = yes
```

```
429.mcf: basepeak = yes
```

```
445.gobmk: basepeak = yes
```

```
456.hmmer: basepeak = yes
```

```
458.sjeng: basepeak = yes
```

```
462.libquantum: basepeak = yes
```

```
464.h264ref: basepeak = yes
```

C++ benchmarks:

```
471.omnetpp: basepeak = yes
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S4, Intel Xeon processor E5420,
2.50 GHz

SPECint_rate2006 = 97.8

SPECint_rate_base2006 = 97.8

CPU2006 license: 22

Test date: Oct-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:26:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 November 2007.