



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp®\_rate2006 = 71.6**

IBM BladeCenter HS21 XM (Intel Xeon E5430)

**SPECfp\_rate\_base2006 = 63.5**

**CPU2006 license:** 11


**Test date:** Nov-2007

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jan-2008

**Tested by:** IBM Corporation

**Software Availability:** Nov-2007

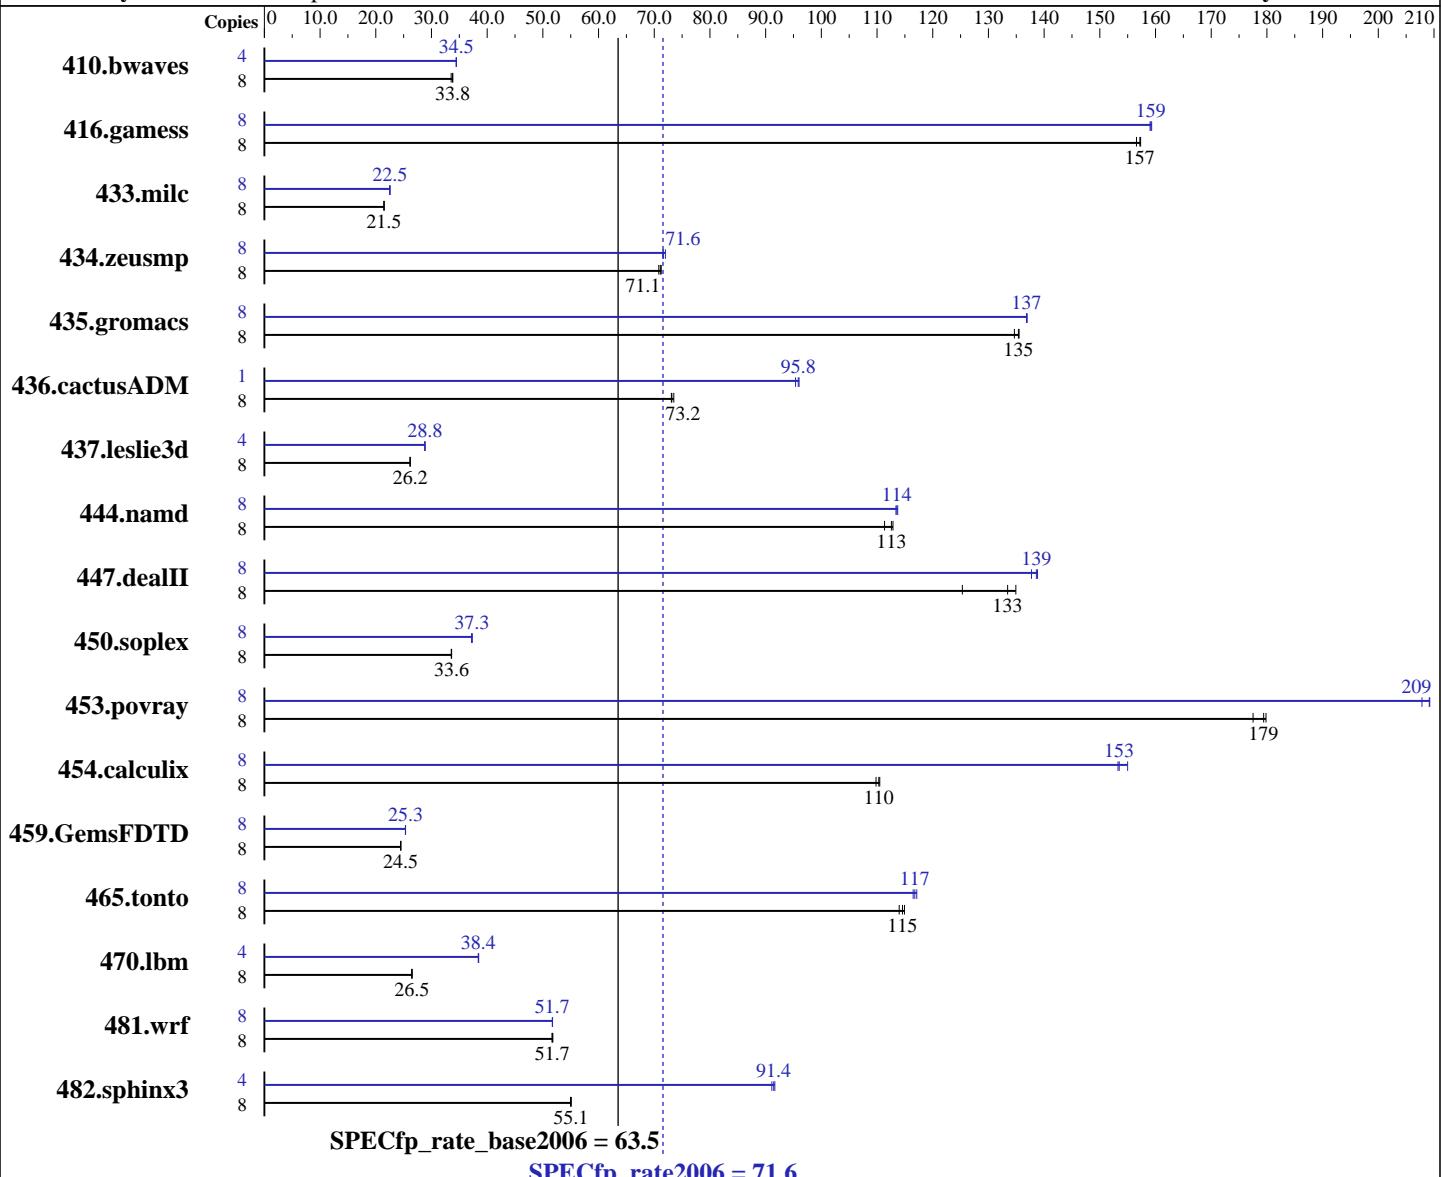

## Hardware

CPU Name: Intel Xeon E5430  
CPU Characteristics: 1333MHz system bus  
CPU MHz: 2666  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

## Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64), kernel 2.6.16.21-0.8-smp  
Compiler: Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008, l\_fc\_p\_10.1.008  
Auto Parallel: Yes  
File System: ReiserFS  
System State: Multi-user, run level 3  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECfp\_rate2006 = 71.6**

IBM BladeCenter HS21 XM (Intel Xeon E5430)

**SPECfp\_rate\_base2006 = 63.5**

CPU2006 license: 11

Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)  
 Disk Subsystem: 1 x 36 GB SAS, 10000 RPM  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.17.50.0.15

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3242	33.5	3215	33.8	<b>3216</b>	<b>33.8</b>	4	1578	34.5	<b>1577</b>	<b>34.5</b>	1577	34.5
416.gamess	8	1000	157	<b>997</b>	<b>157</b>	996	157	8	<b>984</b>	<b>159</b>	983	159	985	159
433.milc	8	3417	21.5	<b>3418</b>	<b>21.5</b>	3420	21.5	8	<b>3258</b>	<b>22.5</b>	3264	22.5	3255	22.6
434.zeusmp	8	<b>1024</b>	<b>71.1</b>	1022	71.3	1028	70.8	8	<b>1016</b>	<b>71.6</b>	1017	71.6	1011	72.0
435.gromacs	8	422	136	424	135	<b>422</b>	<b>135</b>	8	<b>417</b>	<b>137</b>	417	137	417	137
436.cactusADM	8	1308	73.1	<b>1307</b>	<b>73.2</b>	1300	73.5	1	124	96.0	<b>125</b>	<b>95.8</b>	125	95.4
437.leslie3d	8	<b>2873</b>	<b>26.2</b>	2872	26.2	2874	26.2	4	1305	28.8	<b>1304</b>	<b>28.8</b>	1304	28.8
444.namd	8	576	111	569	113	<b>570</b>	<b>113</b>	8	566	113	564	114	<b>565</b>	<b>114</b>
447.dealII	8	<b>686</b>	<b>133</b>	678	135	730	125	8	<b>660</b>	<b>139</b>	659	139	664	138
450.soplex	8	1989	33.5	<b>1985</b>	<b>33.6</b>	1985	33.6	8	1793	37.2	1788	37.3	<b>1791</b>	<b>37.3</b>
453.povray	8	240	178	<b>237</b>	<b>179</b>	237	180	8	<b>203</b>	<b>209</b>	205	208	203	209
454.calculix	8	601	110	597	110	<b>598</b>	<b>110</b>	8	426	155	431	153	<b>430</b>	<b>153</b>
459.GemsFDTD	8	3460	24.5	<b>3471</b>	<b>24.5</b>	3471	24.5	8	3348	25.4	3352	25.3	<b>3350</b>	<b>25.3</b>
465.tonto	8	685	115	<b>687</b>	<b>115</b>	691	114	8	672	117	676	116	<b>674</b>	<b>117</b>
470.lbm	8	4156	26.4	<b>4146</b>	<b>26.5</b>	4145	26.5	4	1431	38.4	1428	38.5	<b>1430</b>	<b>38.4</b>
481.wrf	8	1730	51.7	<b>1729</b>	<b>51.7</b>	1725	51.8	8	1727	51.7	<b>1728</b>	<b>51.7</b>	1728	51.7
482.sphinx3	8	<b>2831</b>	<b>55.1</b>	2831	55.1	2836	55.0	4	<b>856</b>	<b>91.1</b>	851	91.6	<b>853</b>	<b>91.4</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex

470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode

Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Disabled

OMP\_NUM\_THREADS set to number of cores

KMP\_AFFINITY set to physical,0

KMP\_STACKSIZE set to 64M

taskset utility used to bind CPU(s) to processes

## Base Compiler Invocation

C benchmarks:

icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp\_rate2006 = 71.6**

IBM BladeCenter HS21 XM (Intel Xeon E5430)

**SPECfp\_rate\_base2006 = 63.5**

CPU2006 license: 11

Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.games: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp\_rate2006 = 71.6**

IBM BladeCenter HS21 XM (Intel Xeon E5430)

**SPECfp\_rate\_base2006 = 63.5**

**CPU2006 license:** 11

**Test date:** Nov-2007

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jan-2008

**Tested by:** IBM Corporation

**Software Availability:** Nov-2007

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

```
icpc
```

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks (except as noted below):

```
ifort
```

```
437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib  
-I/opt/intel/fc/10.1.008/include
```

Benchmarks using both Fortran and C:

```
icc ifort
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
    433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
    444.namd: -DSPEC_CPU_LP64  
    447.dealII: -DSPEC_CPU_LP64  
    453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
    465.tonto: -DSPEC_CPU_LP64  
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-scalar-rep -prefetch -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 71.6

IBM BladeCenter HS21 XM (Intel Xeon E5430)

SPECfp\_rate\_base2006 = 63.5

CPU2006 license: 11

Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

## Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll12

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0  
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.11.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp\_rate2006 = 71.6**

IBM BladeCenter HS21 XM (Intel Xeon E5430)

**SPECfp\_rate\_base2006 = 63.5**

**CPU2006 license:** 11

**Test date:** Nov-2007

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jan-2008

**Tested by:** IBM Corporation

**Software Availability:** Nov-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.11.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 15:06:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 December 2007.