SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System p 550 (3.5 GHz, 8 core)

SPECint®_rate2006 = 179

SPECint_rate_base2006 = 152

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jan-2008
Hardware Availability: Feb-2008
Software Availability: Feb-2008

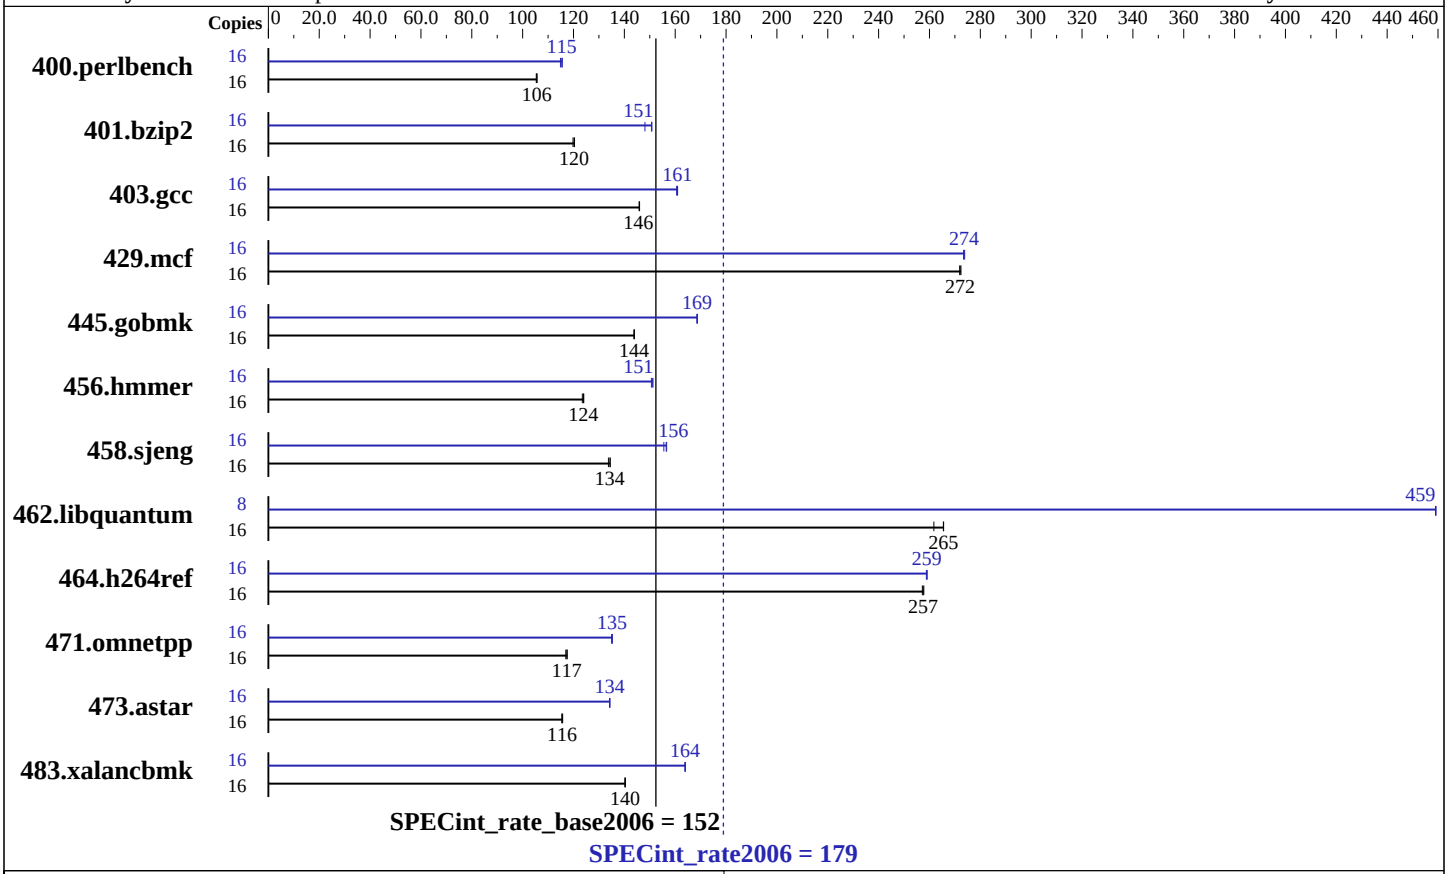

Hardware

CPU Name:	POWER6
CPU Characteristics:	
CPU MHz:	3500
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable:	2,4,6,8 cores
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per core
L3 Cache:	32 MB I+D off chip per chip
Other Cache:	None
Memory:	64 GB (32x2 GB) DDR2 667 MHz
Disk Subsystem:	1x73 GB 1x146 GB SAS 15K RPM
Other Hardware:	None

Software

Operating System:	IBM AIX V6.1 Updated to SP3
Compiler:	XL C/C++ Enterprise Edition V9 for AIX Updated with the Oct2007 PTF.
Auto Parallel:	No
File System:	AIX/JFS2
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	--

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System p 550 (3.5 GHz, 8 core)

SPECint_rate2006 = 179

SPECint_rate_base2006 = 152

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jan-2008
Hardware Availability: Feb-2008
Software Availability: Feb-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	1484	105	**1481**	**106**	1479	106	16	1361	115	1352	116	**1355**	**115**
401.bzip2	16	1289	120	**1284**	**120**	1282	120	16	1043	148	**1025**	**151**	1024	151
403.gcc	16	882	146	**882**	**146**	883	146	16	**801**	**161**	802	161	800	161
429.mcf	16	536	272	537	272	**536**	**272**	16	534	273	**533**	**274**	533	274
445.gobmk	16	1166	144	**1167**	**144**	1167	144	16	**995**	**169**	996	169	995	169
456.hmmer	16	**1204**	**124**	1204	124	1209	123	16	991	151	**989**	**151**	987	151
458.sjeng	16	**1441**	**134**	1440	134	1448	134	16	**1237**	**156**	1236	157	1245	156
462.libquantum	16	1248	266	1267	262	**1249**	**265**	8	361	459	361	459	**361**	**459**
464.h264ref	16	1374	258	**1375**	**257**	1377	257	16	1367	259	1368	259	**1367**	**259**
471.omnetpp	16	**852**	**117**	851	118	855	117	16	741	135	**739**	**135**	739	135
473.astar	16	970	116	973	115	**972**	**116**	16	836	134	**837**	**134**	837	134
483.xalancbmk	16	**787**	**140**	786	140	787	140	16	674	164	**673**	**164**	673	164

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
See flags file of details on following settings.
all ulimits set to unlimited.
Envionment variables set before executing benchmarks:
  MALLOCOPTIONS=pool
  MEMORY_AFFINITY=MCM
  XLFRTEOPTS=intrinthds=1
System set to "Enhanced" mode when defining partition on HMC.
bindprocessor command used on submit to bind each copy to a
  unique processor.
2000 16M large pages defined with vmo command
Remote console disabled in /etc/inittab.
fdpr binary optimization tool used for:
  400.perlbench 401.bzip2 403.gcc 429.mcf 456.hmmer
  458.sjent 462.libquantum 464.h264ref 473.astar
```

Base Compiler Invocation

C benchmarks:

```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:

```
/usr/vacpp/bin/xlC
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Base Optimization Flags

C benchmarks:
-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qalias=noansi -qalloca -blpdata

C++ benchmarks:
-bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all -blpdata

Base Other Flags

C benchmarks:
-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:
-qipa=noobject -qipa=threads -qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:
/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:
/usr/vacpp/bin/xlC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
403.gcc: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qalias=noansi -qfdpr -blpdata

401.bzip2: -bmaxdata:0x4ffffffc -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qfdpr -blpdata

403.gcc: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -D_ILS_MACROS -qalloca -qfdpr -q64 -blpdata

429.mcf: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qfdpr -blpdata

445.gobmk: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -blpdata

456.hmmer: -O5 -qlargepage -D_ILS_MACROS -qfdpr -blpdata

458.sjeng: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qfdpr -blpdata

462.libquantum: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -q64 -qfdpr -blpdata

464.h264ref: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64 -D_ILS_MACROS -qenablevmx -qvecnvol -qfdpr -bdatapsize:64K -bstackpsize:64K -btextpsize:64K

C++ benchmarks:

471.omnetpp: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qalign=natural -qrtti=all -qinlglue -blpdata

473.astar: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -qfdpr -qinlglue -qalign=natural -blpdata

483.xalancbmk: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -qinlglue -D__IBM_FAST_VECTOR -blpdata

Peak Other Flags

C benchmarks:
```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

C++ benchmarks:
```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.05.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.05.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:59:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 February 2008.