



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = **15.6**

IBM System x3550 (Intel Xeon E5205)

SPECfp_base2006 = **13.5**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

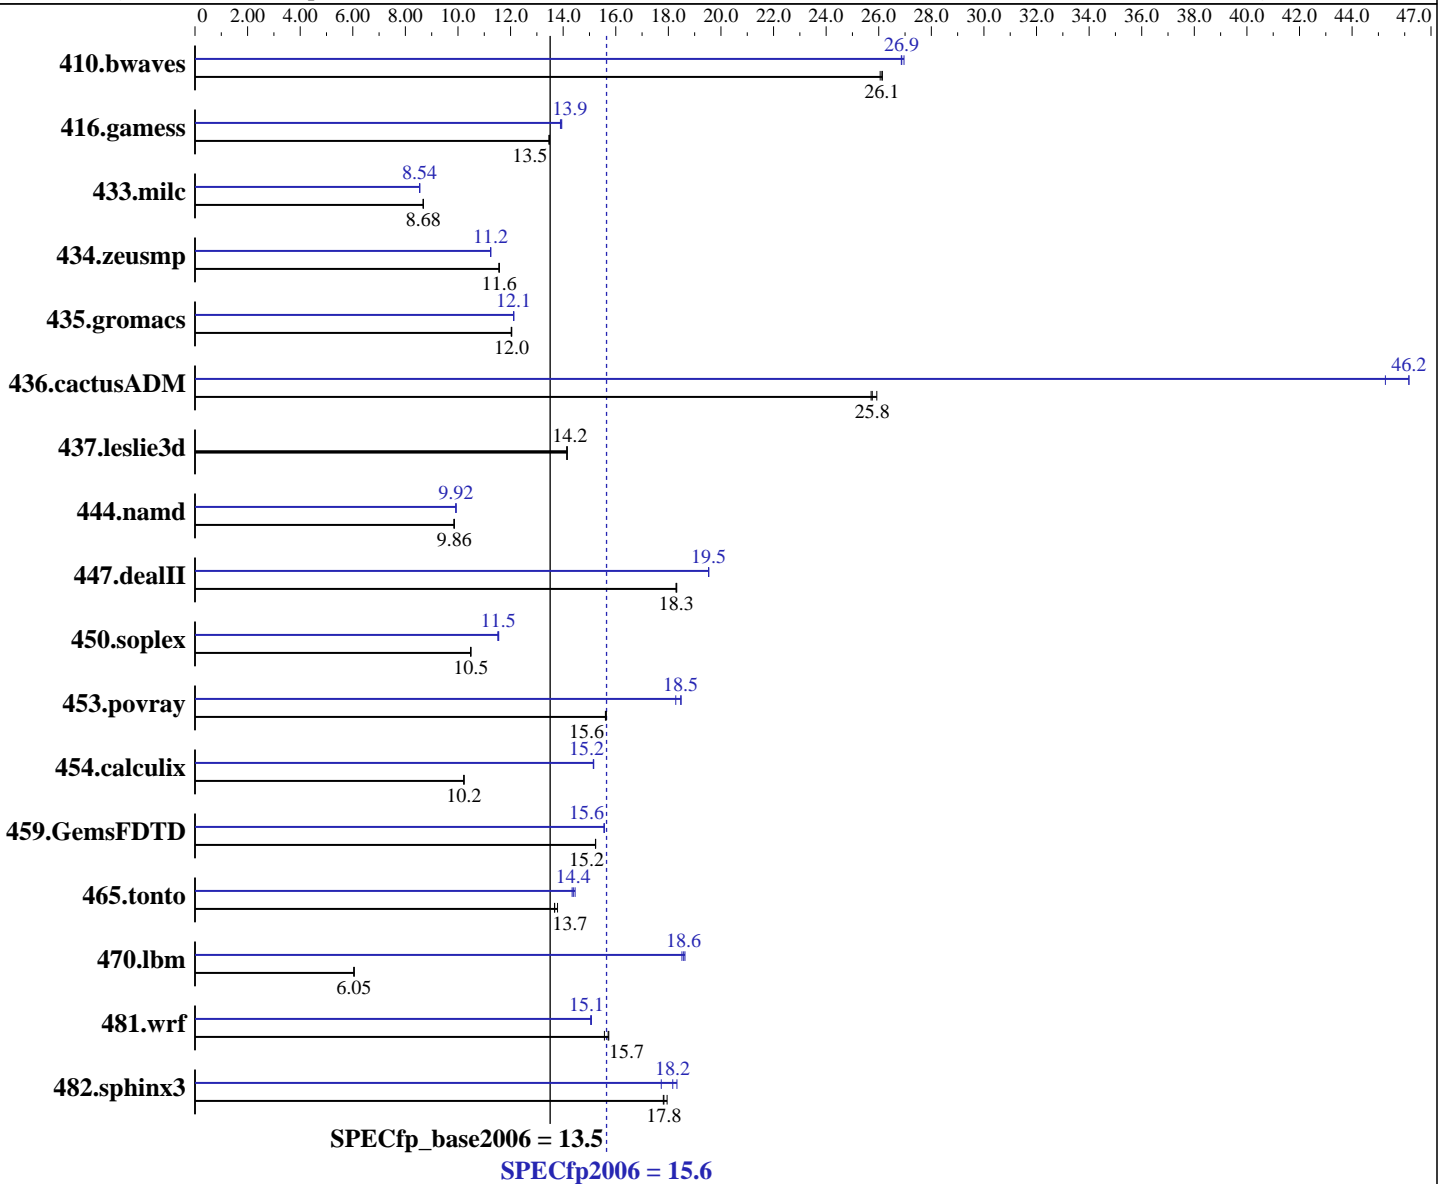

Hardware

CPU Name: Intel Xeon E5205
 CPU Characteristics: 1066MHz system bus
 CPU MHz: 1866
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64), Kernel 2.6.16.21-0.8-smp
 Compiler: Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 15.6

IBM System x3550 (Intel Xeon E5205)

SPECfp_base2006 = 13.5

CPU2006 license: 11

Test date: Jan-2008

Test sponsor: IBM Corporation

Hardware Availability: Mar-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem: 1 x 36 GB SAS, 15000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	522	26.1	520	26.1	520	26.1	504	27.0	506	26.9	506	26.9
416.gamess	1453	13.5	1453	13.5	1454	13.5	1404	13.9	1406	13.9	1409	13.9
433.milc	1057	8.69	1057	8.68	1058	8.68	1075	8.54	1075	8.54	1074	8.55
434.zeusmp	786	11.6	787	11.6	787	11.6	810	11.2	809	11.2	809	11.2
435.gromacs	593	12.0	594	12.0	593	12.0	589	12.1	589	12.1	589	12.1
436.cactusADM	461	25.9	464	25.8	465	25.7	259	46.2	264	45.3	259	46.2
437.leslie3d	664	14.2	664	14.2	665	14.1	664	14.2	664	14.2	665	14.1
444.namd	814	9.85	814	9.86	813	9.86	808	9.92	809	9.92	808	9.93
447.dealII	625	18.3	624	18.3	625	18.3	586	19.5	586	19.5	586	19.5
450.soplex	795	10.5	795	10.5	796	10.5	723	11.5	724	11.5	722	11.5
453.povray	340	15.6	341	15.6	341	15.6	291	18.3	288	18.5	288	18.5
454.calculix	806	10.2	807	10.2	807	10.2	544	15.2	545	15.1	545	15.2
459.GemsFDTD	696	15.2	697	15.2	697	15.2	682	15.6	682	15.6	682	15.6
465.tonto	714	13.8	720	13.7	719	13.7	681	14.5	686	14.3	684	14.4
470.lbm	2270	6.05	2271	6.05	2276	6.04	737	18.6	739	18.6	742	18.5
481.wrf	710	15.7	717	15.6	711	15.7	742	15.0	742	15.1	741	15.1
482.sphinx3	1086	18.0	1093	17.8	1094	17.8	1063	18.3	1099	17.7	1073	18.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All benchmarks compiled in 64-bit mode except 450.soplex, 470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode
Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Enabled
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 200M
Powersaved dameon was disabled in OS

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 15.6

IBM System x3550 (Intel Xeon E5205)

SPECfp_base2006 = 13.5

CPU2006 license: 11

Test date: Jan-2008

Test sponsor: IBM Corporation

Hardware Availability: Mar-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -parallel

C++ benchmarks:
-fast -parallel

Fortran benchmarks:
-fast -parallel

Benchmarks using both Fortran and C:
-fast -parallel



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 15.6

IBM System x3550 (Intel Xeon E5205)

SPECfp_base2006 = 13.5

CPU2006 license: 11

Test date: Jan-2008

Test sponsor: IBM Corporation

Hardware Availability: Mar-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

```
433.milc: icc
```

C++ benchmarks (except as noted below):

```
icpc
```

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icc ifort
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-req- -prefetch -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 15.6

IBM System x3550 (Intel Xeon E5205)

SPECfp_base2006 = 13.5

CPU2006 license: 11

Test date: Jan-2008

Test sponsor: IBM Corporation

Hardware Availability: Mar-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.14.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.14.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 15.6

IBM System x3550 (Intel Xeon E5205)

SPECfp_base2006 = 13.5

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:52:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 February 2008.