



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G5  
(3.33 GHz, Intel Xeon X5260)

**SPECfp<sup>®</sup>\_rate2006 = 57.0**

**SPECfp\_rate\_base2006 = 50.9**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

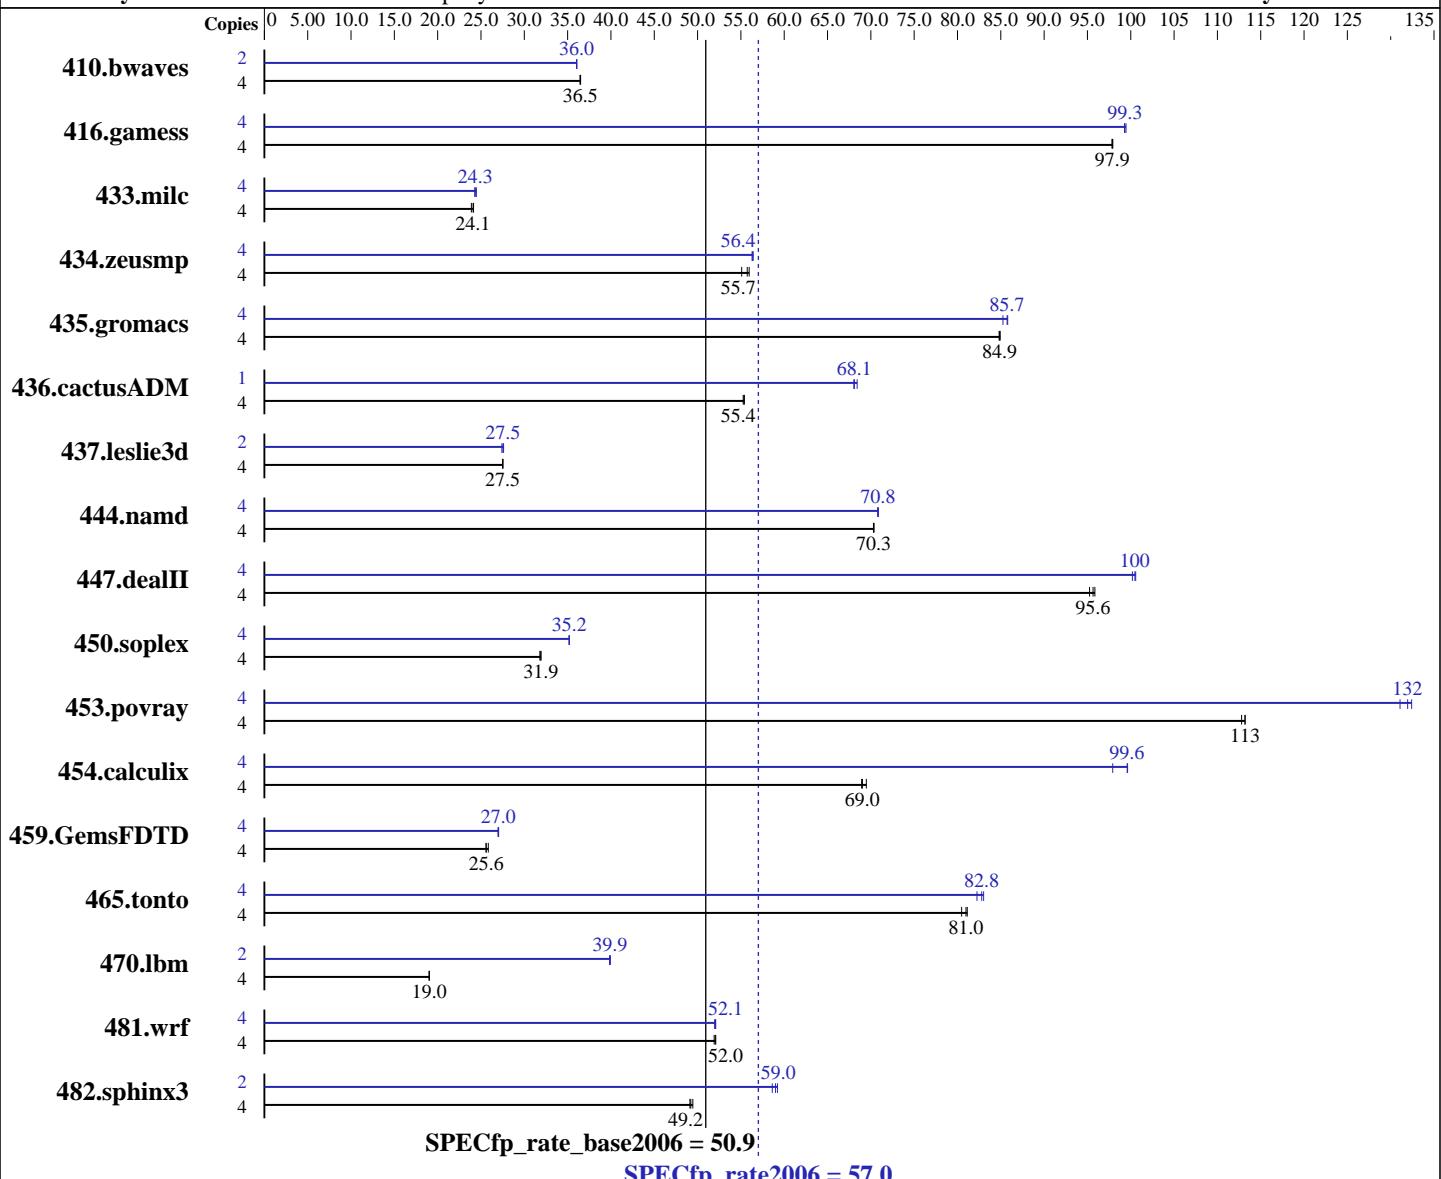

### Hardware

CPU Name: Intel Xeon X5260  
CPU Characteristics: 3.33 GHz, 6 MB L2 shared, 1333 MHz system bus  
CPU MHz: 3333  
FPU: Integrated  
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 6 MB I+D on chip per chip

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
Compiler: Intel C++ Compiler for applications running on IA-32 and Intel 64, Version 10.1 Build 20070913 Package ID: l\_cc\_p\_10.1.008  
Intel Fortran Compiler for applications running on IA-32 and Intel 64, Version 10.1 Build 20070913 Package ID: l\_cc\_p\_10.1.008  
Auto Parallel: Yes  
File System: ext2

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G5  
(3.33 GHz, Intel Xeon X5260)

**SPECfp\_rate2006 = 57.0**

**SPECfp\_rate\_base2006 = 50.9**

CPU2006 license: 3

Test date: Jan-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8x2 GB PC2-5300F CL5)  
Disk Subsystem: 1x72 GB 15 K SAS  
Other Hardware: None

System State: Multi-user run level 3  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: binutils-2.17.50

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1489	36.5	<u>1491</u>	<b>36.5</b>	1492	36.4	2	754	36.0	<u>754</u>	<b>36.0</b>	754	36.1
416.gamess	4	800	97.9	<u>800</u>	<b>97.9</b>	801	97.8	4	789	<u>99.3</u>	789	99.3	788	99.5
433.milc	4	<u>1524</u>	<b>24.1</b>	1537	23.9	1521	24.1	4	1512	24.3	<u>1508</u>	<b>24.3</b>	1501	24.5
434.zeusmp	4	<u>653</u>	<b>55.7</b>	661	55.1	651	56.0	4	<u>646</u>	<b>56.4</b>	647	56.3	645	56.4
435.gromacs	4	336	84.9	337	84.8	<u>337</u>	<b>84.9</b>	4	333	85.8	335	85.2	<u>333</u>	<b>85.7</b>
436.cactusADM	4	865	55.3	<u>863</u>	<b>55.4</b>	863	55.4	1	175	68.4	176	68.0	<u>175</u>	<b>68.1</b>
437.leslie3d	4	1365	27.5	<u>1367</u>	<b>27.5</b>	1367	27.5	2	<u>683</u>	<b>27.5</b>	681	27.6	686	27.4
444.namd	4	456	70.4	<u>456</u>	<b>70.3</b>	456	70.3	4	453	70.8	453	70.9	<u>453</u>	<b>70.8</b>
447.dealII	4	<u>478</u>	<b>95.6</b>	477	95.9	480	95.2	4	457	100	455	101	<u>455</u>	<b>100</b>
450.soplex	4	<u>1045</u>	<b>31.9</b>	1049	31.8	1045	31.9	4	948	35.2	948	35.2	<u>948</u>	<b>35.2</b>
453.povray	4	189	113	<u>188</u>	<b>113</b>	188	113	4	162	131	161	132	<u>161</u>	<b>132</b>
454.calculix	4	475	69.5	<u>478</u>	<b>69.0</b>	479	68.9	4	331	99.6	337	97.9	<u>331</u>	<b>99.6</b>
459.GemsFDTD	4	1659	25.6	<u>1658</u>	<b>25.6</b>	1642	25.8	4	<u>1572</u>	<b>27.0</b>	1573	27.0	<u>1570</u>	27.0
465.tonto	4	485	81.1	<u>486</u>	<b>81.0</b>	489	80.5	4	474	83.0	<u>475</u>	<b>82.8</b>	479	82.3
470.lbm	4	2888	19.0	<u>2888</u>	<b>19.0</b>	2887	19.0	2	<u>689</u>	<b>39.9</b>	690	39.8	688	39.9
481.wrf	4	861	51.9	858	52.1	<u>859</u>	<b>52.0</b>	4	860	52.0	<u>858</u>	<b>52.1</b>	858	52.1
482.sphinx3	4	1587	49.1	<u>1584</u>	<b>49.2</b>	1576	49.5	2	<u>658</u>	<b>59.2</b>	<u>661</u>	<b>59.0</b>	665	58.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 64M

## Platform Notes

BIOS configuration:

Power Regulator set to Static High Performance Mode



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G5  
(3.33 GHz, Intel Xeon X5260)

**SPECfp\_rate2006 = 57.0**

**SPECfp\_rate\_base2006 = 50.9**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jan-2008

**Hardware Availability:** Jan-2008

**Software Availability:** Nov-2007

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
  444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:  
-fast

C++ benchmarks:  
-fast

Fortran benchmarks:  
-fast

Benchmarks using both Fortran and C:  
-fast



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G5  
(3.33 GHz, Intel Xeon X5260)

**SPECfp\_rate2006 = 57.0**

**SPECfp\_rate\_base2006 = 50.9**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jan-2008

**Hardware Availability:** Jan-2008

**Software Availability:** Nov-2007

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

```
icpc
```

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks (except as noted below):

```
ifort
```

```
437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib  
-I/opt/intel/fc/10.1.008/include
```

Benchmarks using both Fortran and C:

```
icc ifort
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
    433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
    444.namd: -DSPEC_CPU_LP64  
    447.dealII: -DSPEC_CPU_LP64  
    453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
    465.tonto: -DSPEC_CPU_LP64  
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-scalar-rep -prefetch -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G5  
(3.33 GHz, Intel Xeon X5260)

**SPECfp\_rate2006 = 57.0**

**SPECfp\_rate\_base2006 = 50.9**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jan-2008

**Hardware Availability:** Jan-2008

**Software Availability:** Nov-2007

## Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll12

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0  
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-fp-flags.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G5  
(3.33 GHz, Intel Xeon X5260)

**SPECfp\_rate2006 = 57.0**

**SPECfp\_rate\_base2006 = 50.9**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jan-2008

**Hardware Availability:** Jan-2008

**Software Availability:** Nov-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-fp-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 16:00:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 February 2008.