



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Pentium Dual-Core E2140,
1.60 GHz

SPECint_rate2006 = 20.7

SPECint_rate_base2006 = 18.3

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

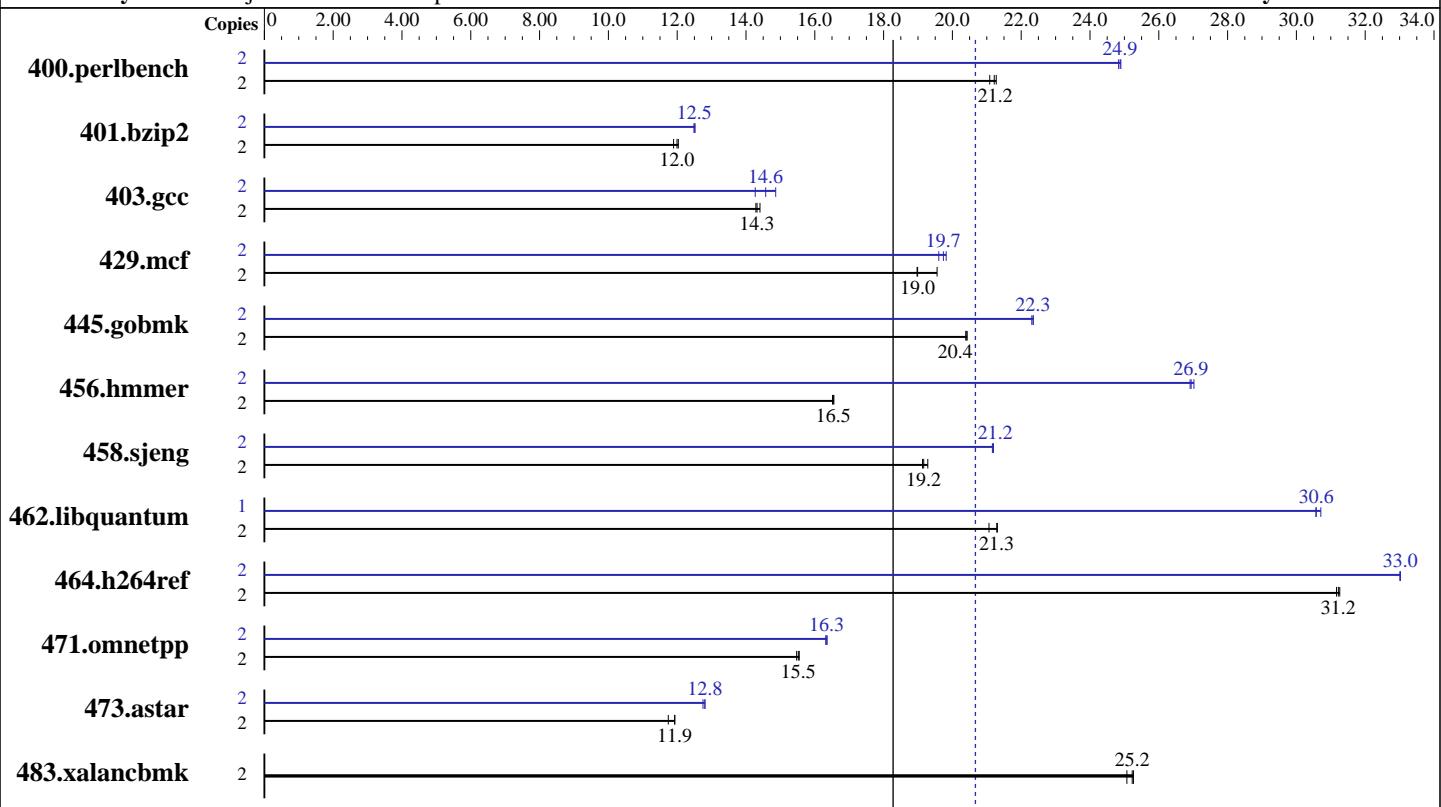

SPECint_rate_base2006 = 18.3

SPECint_rate2006 = 20.7

Hardware

CPU Name:	Intel Pentium Dual-Core E2140
CPU Characteristics:	800 MHz system bus
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	4 GB (4x1 GB PC2-6400E, 2 rank, CAS 6-6-6, with ECC)
Disk Subsystem:	Fujitsu MAY2036RC (SAS, 36GB, 10000rpm)
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
Auto Parallel:	Yes
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap Library, Version 8.1 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Pentium Dual-Core E2140,
1.60 GHz

SPECint_rate2006 = 20.7

SPECint_rate_base2006 = 18.3

CPU2006 license: 22

Test date: Jan-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Jan-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	918	21.3	927	21.1	921	21.2	2	787	24.8	785	24.9	785	24.9
401.bzip2	2	1604	12.0	1623	11.9	1609	12.0	2	1545	12.5	1541	12.5	1545	12.5
403.gcc	2	1127	14.3	1118	14.4	1124	14.3	2	1083	14.9	1128	14.3	1105	14.6
429.mcf	2	961	19.0	961	19.0	933	19.6	2	924	19.7	920	19.8	930	19.6
445.gobmk	2	1028	20.4	1027	20.4	1029	20.4	2	939	22.3	939	22.3	940	22.3
456.hammer	2	1127	16.6	1130	16.5	1128	16.5	2	691	27.0	693	26.9	693	26.9
458.sjeng	2	1263	19.2	1265	19.1	1255	19.3	2	1144	21.2	1142	21.2	1142	21.2
462.libquantum	2	1967	21.1	1945	21.3	1947	21.3	1	675	30.7	678	30.6	678	30.6
464.h264ref	2	1418	31.2	1416	31.3	1420	31.2	2	1340	33.0	1341	33.0	1340	33.0
471.omnetpp	2	805	15.5	808	15.5	804	15.5	2	766	16.3	765	16.3	764	16.4
473.astar	2	1177	11.9	1196	11.7	1177	11.9	2	1101	12.8	1097	12.8	1096	12.8
483.xalancbmk	2	546	25.3	550	25.1	547	25.2	2	546	25.3	550	25.1	547	25.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'OMP_NUM_THREADS' set to number of cores (default)

General Notes

This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hammer in peak were built with 64-bit Intel
compiler by changing the path for include and library files.

BIOS configuration:

Hardware Prefetch = Enable, Adjacent Sector Prefetch = Enable

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Pentium Dual-Core E2140,
1.60 GHz

SPECint_rate2006 = 20.7

SPECint_rate_base2006 = 18.3

CPU2006 license: 22

Test date: Jan-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Jan-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmpllr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

456.hmmr: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Pentium Dual-Core E2140,
1.60 GHz

SPECint_rate2006 = 20.7

SPECint_rate_base2006 = 18.3

CPU2006 license: 22

Test date: Jan-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Jan-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll12 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll14 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Pentium Dual-Core E2140,
1.60 GHz

SPECint_rate2006 = 20.7

SPECint_rate_base2006 = 18.3

CPU2006 license: 22

Test date: Jan-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Jan-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 15:59:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 February 2008.