



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX600 S4, Intel Xeon E7330, 2.40 GHz

SPECint_rate2006 = 94.9

SPECint_rate_base2006 = 85.1

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

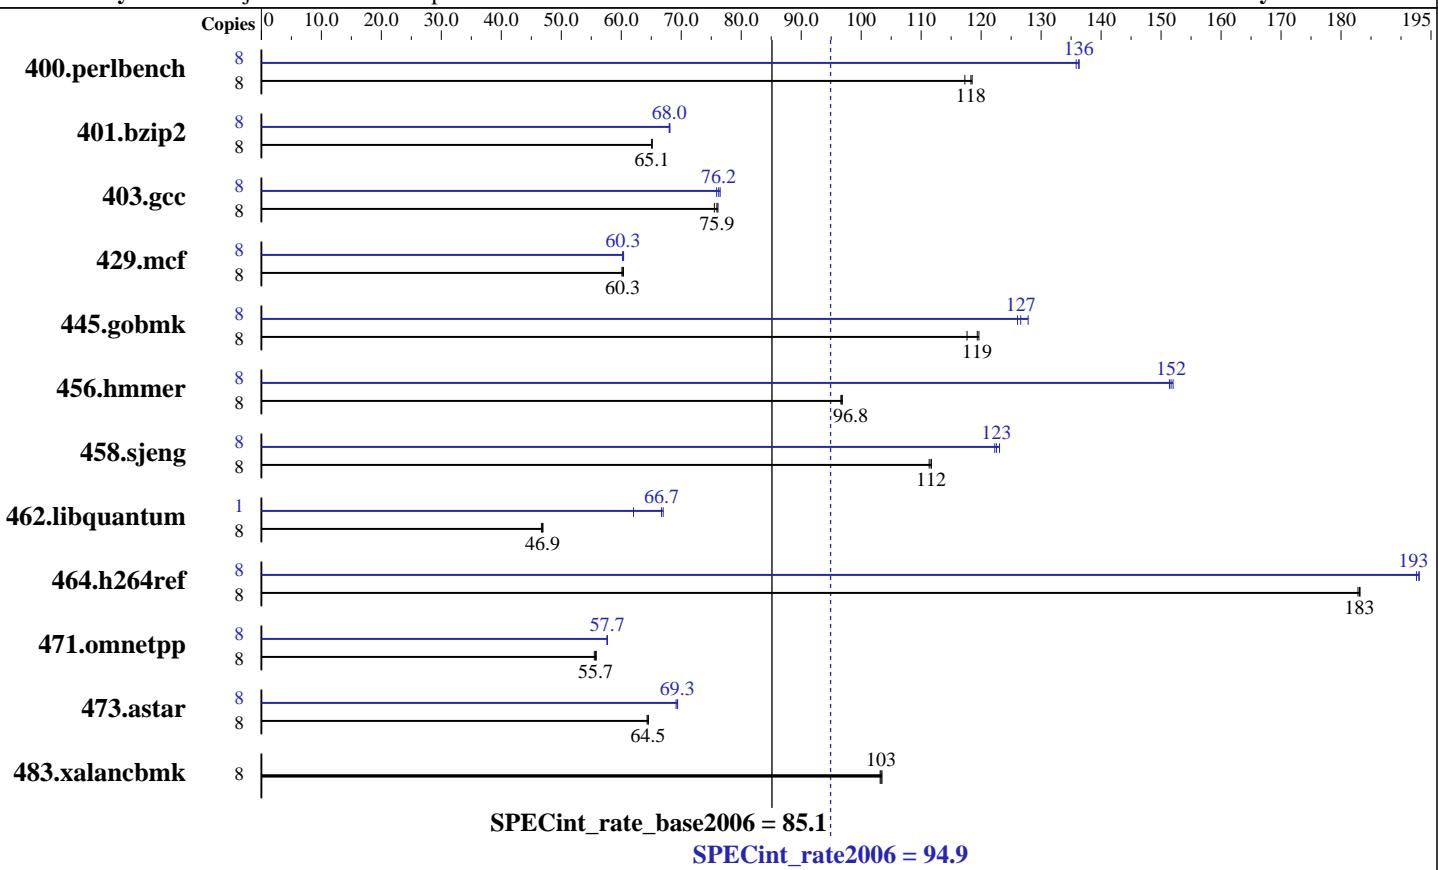

Hardware

CPU Name:	Intel Xeon E7330
CPU Characteristics:	1067 MHz system bus
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB L1+D on chip per chip, 3 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (16x1 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem:	Seagate ST973451SS (SAS, 73GB, 15000rpm)
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
Auto Parallel:	Yes
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap Library, Version 8.1 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX600 S4, Intel Xeon E7330, 2.40 GHz

SPECint_rate2006 = 94.9

CPU2006 license: 22

Test date: Jan-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	666	117	661	118	660	118	8	574	136	575	136	573	136
401.bzip2	8	1186	65.1	1186	65.1	1185	65.2	8	1135	68.0	1133	68.1	1135	68.0
403.gcc	8	853	75.5	848	75.9	846	76.1	8	848	75.9	842	76.5	845	76.2
429.mcf	8	1214	60.1	1211	60.3	1209	60.4	8	1208	60.4	1210	60.3	1212	60.2
445.gobmk	8	713	118	701	120	703	119	8	656	128	663	127	666	126
456.hammer	8	771	96.8	773	96.6	771	96.9	8	491	152	493	151	492	152
458.sjeng	8	867	112	867	112	869	111	8	792	122	790	123	787	123
462.libquantum	8	3550	46.7	3535	46.9	3532	46.9	1	311	66.7	309	67.0	334	62.0
464.h264ref	8	967	183	968	183	967	183	8	917	193	917	193	919	193
471.omnetpp	8	901	55.5	897	55.7	896	55.8	8	867	57.7	868	57.6	867	57.7
473.astar	8	873	64.3	871	64.5	870	64.5	8	812	69.1	810	69.3	809	69.4
483.xalancbmk	8	535	103	534	103	533	103	8	535	103	534	103	533	103

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'OMP_NUM_THREADS' set to number of cores (default)

General Notes

This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hammer in peak were built with 64-bit Intel compiler by changing the path for include and library files.

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX600 S4, Intel Xeon E7330, 2.40 GHz

SPECint_rate2006 = 94.9

CPU2006 license: 22

Test date: Jan-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmpllr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

456.hmmr: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX600 S4, Intel Xeon E7330, 2.40 GHz

SPECint_rate2006 = 94.9

CPU2006 license: 22

Test date: Jan-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
                  -prefetch  
  
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
  
403.gcc: -fast -inline-calloc -opt-malloc-options=3  
  
429.mcf: -fast -prefetch  
  
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
                  -no-prec-div -ansi-alias  
  
456.hmmer: -fast -unroll12 -ansi-alias -opt-multi-version-aggressive  
  
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
  
462.libquantum: -fast -unroll14 -Ob0 -prefetch  
                  -opt-streaming-stores always -vec-guard-write  
                  -opt-malloc-options=3 -parallel -par-runtime-control  
  
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
                  -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
                  -no-prec-div -ansi-alias -opt-ra-region-strategy=block  
                  -Wl,-z,muldefs  
                  -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap  
  
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
                  -no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
                  -Wl,-z,muldefs  
                  -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap
```

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX600 S4, Intel Xeon E7330, 2.40 GHz

SPECint_rate2006 = 94.9

SPECint_rate_base2006 = 85.1

CPU2006 license: 22

Test date: Jan-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-INT-ia32-linux-flags.20090714.04.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-INT-ia32-linux-flags.20090714.04.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 15:42:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 March 2008.