



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint[®]_rate2006 = 51.8

Acer Altos R720 (Intel Xeon E5205)

SPECint_rate_base2006 = 44.4

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

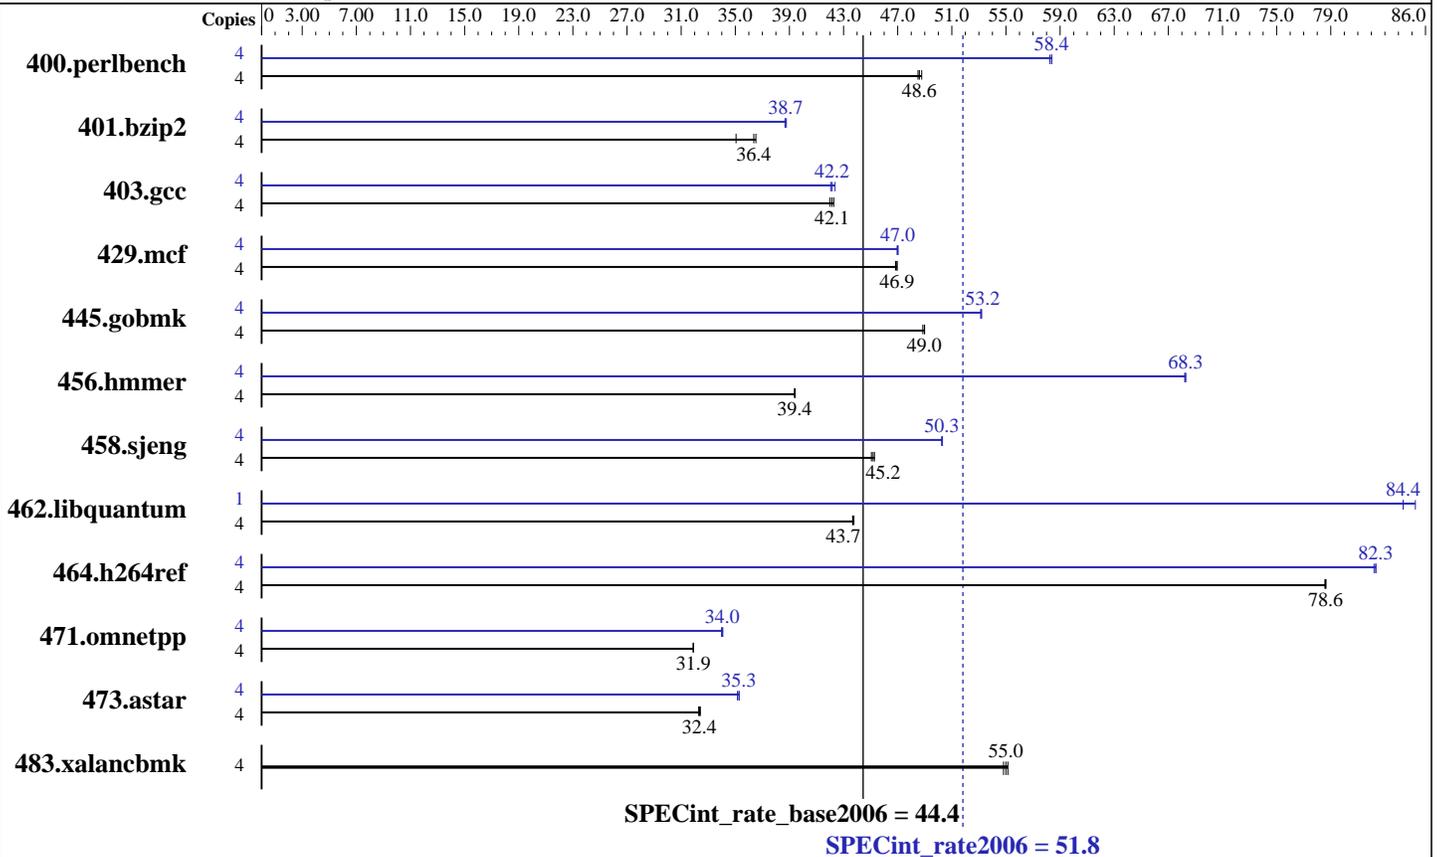

Hardware

CPU Name: Intel Xeon E5205
 CPU Characteristics: 1066MHz system bus
 CPU MHz: 1860
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2048MB ECC FB-DIMM DDR2-667 CL5-5-5)
 Disk Subsystem: 1 x 73GB 10000PRM SAS HDD
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 SP1 (x86_64)
 Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler 10.1 for Linux
 Build 20070913 Package ID: l_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.17.50.0.15



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 51.8

Acer Altos R720 (Intel Xeon E5205)

SPECint_rate_base2006 = 44.4

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	806	48.5	804	48.6	801	48.8	4	670	58.4	671	58.2	669	58.4
401.bzip2	4	1061	36.4	1057	36.5	1101	35.1	4	996	38.8	997	38.7	998	38.7
403.gcc	4	762	42.3	767	42.0	764	42.1	4	764	42.2	760	42.4	765	42.1
429.mcf	4	777	47.0	777	46.9	779	46.8	4	777	47.0	776	47.0	776	47.0
445.gobmk	4	859	48.9	857	49.0	857	49.0	4	789	53.2	790	53.1	789	53.2
456.hmmer	4	947	39.4	948	39.4	948	39.4	4	547	68.3	547	68.3	547	68.2
458.sjeng	4	1071	45.2	1074	45.1	1069	45.3	4	962	50.3	963	50.3	963	50.3
462.libquantum	4	1897	43.7	1894	43.8	1898	43.7	1	243	85.3	246	84.4	246	84.4
464.h264ref	4	1126	78.6	1127	78.6	1126	78.6	4	1075	82.3	1077	82.2	1075	82.3
471.omnetpp	4	784	31.9	784	31.9	784	31.9	4	734	34.0	736	34.0	734	34.1
473.astar	4	868	32.4	869	32.3	866	32.4	4	796	35.3	799	35.2	796	35.3
483.xalancbmk	4	502	55.0	503	54.8	501	55.1	4	502	55.0	503	54.8	501	55.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

This result was measured on the Acer Altos R520.
The Altos R720 and Altos R520 are electronically equivalent.

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode

BIOS Settings

Hardware Prefetcher set to ON

Adjacent Cache Line Prefetch set to ON

All results but peak 462.libquantum used taskset to bind processes to cores.

"ulimit -s unlimited" was set for stacksize unlimited

OMP_NUM_THREADS set to number of cores

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 51.8

Acer Altos R720 (Intel Xeon E5205)

SPECint_rate_base2006 = 44.4

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 51.8

Acer Altos R720 (Intel Xeon E5205)

SPECint_rate_base2006 = 44.4

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Peak Portability Flags (Continued)

483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalanbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 51.8

Acer Altos R720 (Intel Xeon E5205)

SPECint_rate_base2006 = 44.4

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:11:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 April 2008.