



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5420, 2.50GHz)

**SPECint\_rate2006 = 116**

**SPECint\_rate\_base2006 = 94.7**

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Jan-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

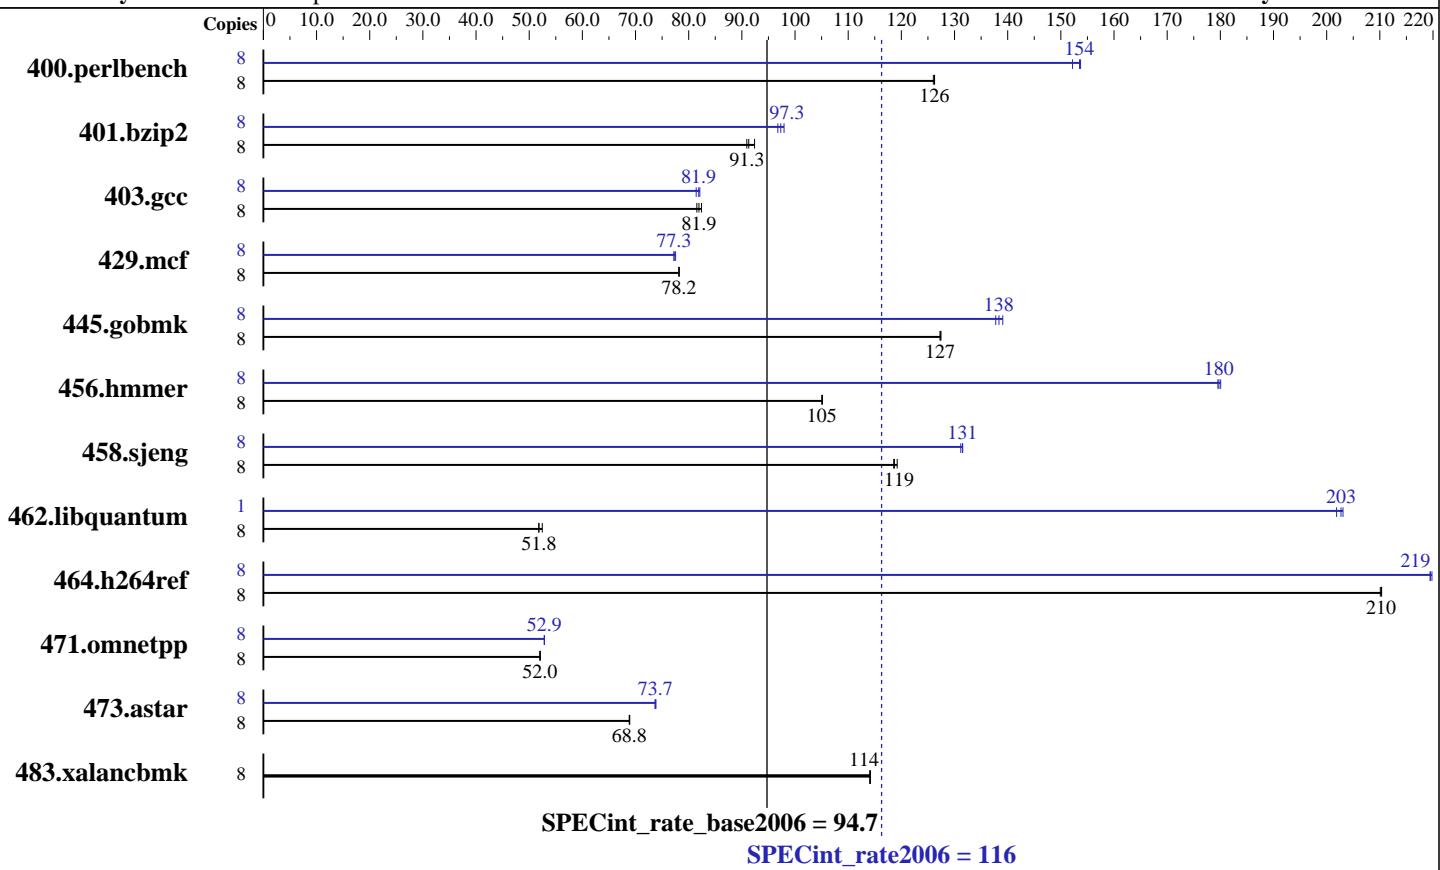

### Hardware

CPU Name: Intel Xeon E5420  
CPU Characteristics: 2.50 GHz, 2x6 MB L2 shared, 1333 MHz bus  
CPU MHz: 2500  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
L3 Cache: None  
Other Cache: None  
Memory: 12 GB (12x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)  
Disk Subsystem: 1x73.2 GB SAS, 15000RPM  
Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
Compiler: Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l\_cc\_p\_10.1.008  
Auto Parallel: Yes  
File System: ext2  
System State: Multiuser, Runlevel 3  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1  
(Intel Xeon E5420,2.50GHz)

**SPECint\_rate2006 = 116**

**SPECint\_rate\_base2006 = 94.7**

CPU2006 license: 20

Test date: Jan-2008

Test sponsor: Bull SAS

Hardware Availability: Dec-2007

Tested by: NEC Corporation

Software Availability: Nov-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	620	126	<b>619</b>	<b>126</b>	619	126	8	514	152	508	154	<b>509</b>	<b>154</b>
401.bzip2	8	849	90.9	<b>846</b>	<b>91.3</b>	836	92.4	8	798	96.8	<b>793</b>	<b>97.3</b>	788	97.9
403.gcc	8	781	82.4	<b>786</b>	<b>81.9</b>	790	81.5	8	784	82.1	791	81.4	<b>786</b>	<b>81.9</b>
429.mcf	8	933	78.2	934	78.1	<b>933</b>	<b>78.2</b>	8	941	77.5	<b>944</b>	<b>77.3</b>	945	77.2
445.gobmk	8	659	127	658	127	<b>659</b>	<b>127</b>	8	607	<b>138</b>	609	138	603	139
456.hmmer	8	710	105	710	105	<b>710</b>	<b>105</b>	8	415	180	416	180	<b>415</b>	<b>180</b>
458.sjeng	8	<b>816</b>	<b>119</b>	812	119	816	119	8	738	131	<b>736</b>	<b>131</b>	736	132
462.libquantum	8	3160	52.5	3200	51.8	<b>3198</b>	<b>51.8</b>	1	102	203	<b>102</b>	<b>203</b>	103	202
464.h264ref	8	842	210	843	210	<b>842</b>	<b>210</b>	8	805	220	<b>807</b>	<b>219</b>	807	219
471.omnetpp	8	960	52.1	961	52.0	<b>961</b>	<b>52.0</b>	8	946	52.9	946	52.9	<b>946</b>	<b>52.9</b>
473.astar	8	816	68.8	<b>816</b>	<b>68.8</b>	815	68.9	8	762	73.7	<b>762</b>	<b>73.7</b>	761	73.8
483.xalancbmk	8	483	114	<b>484</b>	<b>114</b>	484	114	8	483	114	<b>484</b>	<b>114</b>	484	114

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs  
OMP\_NUM\_THREADS set to number of cores (default).

## Platform Notes

Bios settings:

Intel SpeedStep Technology: Disabled

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2,  
456.hmmer, for peak, are compiled in 64-bit mode

The NEC Express5800/120Rh-1(Intel Xeon Processor E5420),  
the NEC Express5800/120Rj-2(Intel Xeon Processor E5420),  
the Bull NovaScale R440 E1 (Intel Xeon E5420,2.50GHz) and  
the Bull NovaScale R460 E1 (Intel Xeon E5420,2.50GHz) models are electronically equivalent.  
The results have been measured on a NEC Express5800/120Rj-2(Intel Xeon Processor E5420) model.

## Base Compiler Invocation

C benchmarks:

icc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5420,2.50GHz)

**SPECint\_rate2006 = 116**

**SPECint\_rate\_base2006 = 94.7**

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Jan-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:  
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/opt/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include

456.hmmr: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5420,2.50GHz)

**SPECint\_rate2006 = 116**

**SPECint\_rate\_base2006 = 94.7**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** NEC Corporation

**Test date:** Jan-2008

**Hardware Availability:** Dec-2007

**Software Availability:** Nov-2007

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch  
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
403.gcc: -fast -inline-calloc -opt-malloc-options=3  
429.mcf: -fast -prefetch  
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias  
456.hmmer: -fast -unroll12 -ansi-alias -opt-multi-version-aggressive  
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
462.libquantum: -fast -unroll14 -O0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control  
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/opt/SmartHeap\_8.1/lib -lsmartheap  
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/opt/SmartHeap\_8.1/lib -lsmartheap  
483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1  
(Intel Xeon E5420,2.50GHz)

**SPECint\_rate2006 = 116**

**SPECint\_rate\_base2006 = 94.7**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** NEC Corporation

**Test date:** Jan-2008

**Hardware Availability:** Dec-2007

**Software Availability:** Nov-2007

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 18:03:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 April 2008.