



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon E5440,2.83GHz)

SPECint®_rate2006 = 125

SPECint_rate_base2006 = 101

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

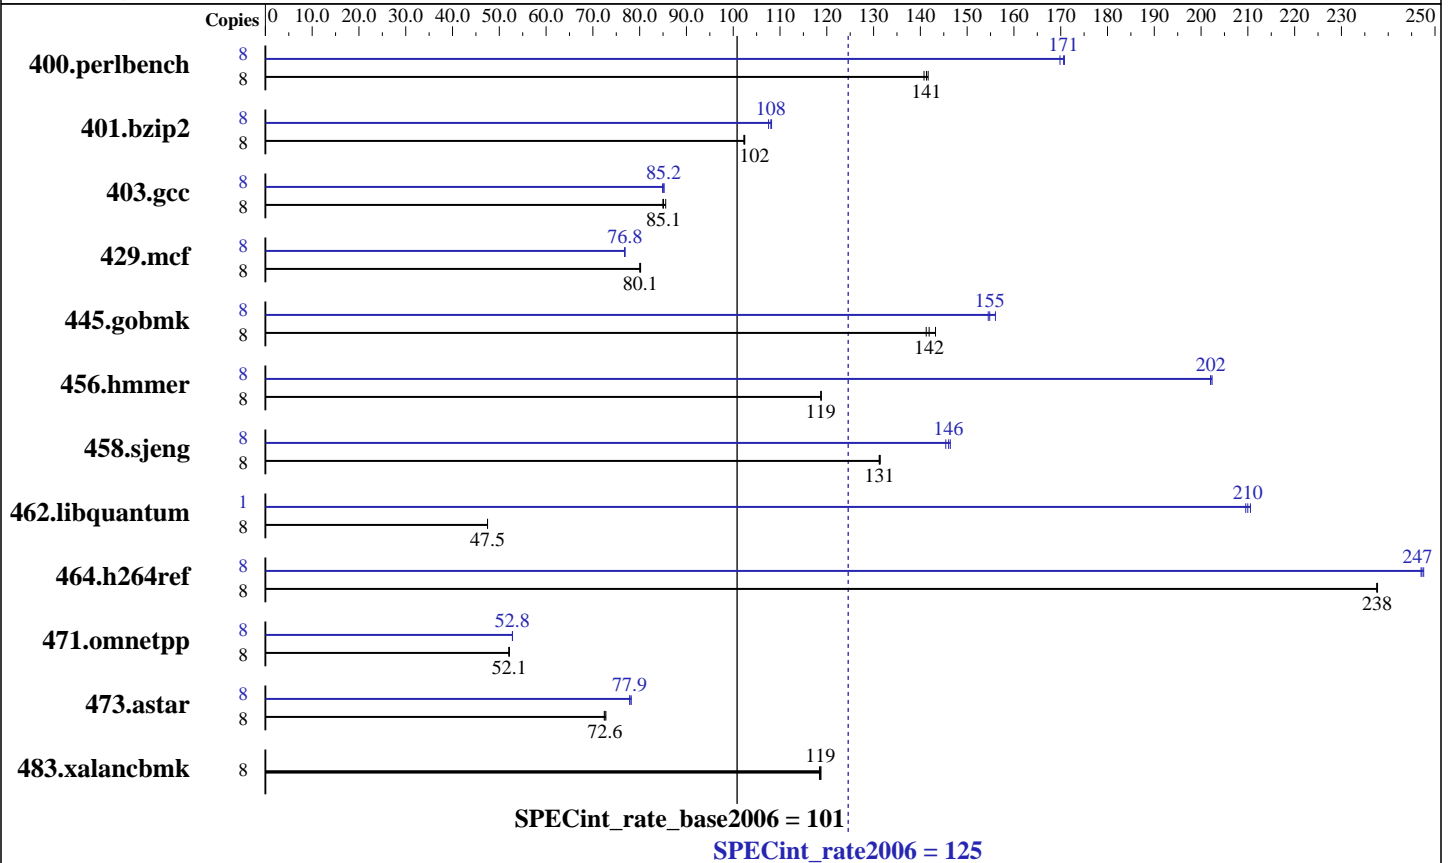

Hardware

CPU Name: Intel Xeon E5440
 CPU Characteristics: 2.83 GHz, 12 MB L2, 1333 MHz system bus
 CPU MHz: 2833
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB) FB-DIMM PC2-5300F ECC CL5
 Disk Subsystem: 1x73 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SUSE LINUX Enterprise Server 10 SP1
 Kernel 2.6.16.46-0.12-smp for x86_64
 Compiler: Intel C++ Compiler 10.1 for Linux
 Build 20070913 Package ID: l_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.17.50.0.15
 SmartHeap library V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon E5440,2.83GHz)

SPECint_rate2006 = 125

SPECint_rate_base2006 = 101

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	555	141	552	142	<u>553</u>	<u>141</u>	8	<u>458</u>	<u>171</u>	460	170	458	171
401.bzip2	8	753	102	755	102	<u>754</u>	<u>102</u>	8	<u>715</u>	<u>108</u>	718	108	714	108
403.gcc	8	753	85.6	<u>757</u>	<u>85.1</u>	758	85.0	8	<u>756</u>	<u>85.2</u>	756	85.2	759	84.9
429.mcf	8	910	80.2	912	80.0	<u>911</u>	<u>80.1</u>	8	949	76.9	950	76.8	<u>949</u>	<u>76.8</u>
445.gobmk	8	586	143	594	141	<u>592</u>	<u>142</u>	8	<u>542</u>	<u>155</u>	538	156	543	155
456.hmmer	8	629	119	<u>629</u>	<u>119</u>	628	119	8	<u>369</u>	<u>202</u>	369	202	369	202
458.sjeng	8	737	131	738	131	<u>738</u>	<u>131</u>	8	661	146	<u>663</u>	<u>146</u>	666	145
462.libquantum	8	3491	47.5	<u>3491</u>	<u>47.5</u>	3491	47.5	1	98.4	211	<u>98.7</u>	<u>210</u>	98.9	210
464.h264ref	8	745	238	<u>745</u>	<u>238</u>	745	238	8	715	248	<u>716</u>	<u>247</u>	717	247
471.omnetpp	8	961	52.0	<u>959</u>	<u>52.1</u>	959	52.2	8	<u>947</u>	<u>52.8</u>	947	52.8	947	52.8
473.astar	8	772	72.8	<u>774</u>	<u>72.6</u>	775	72.4	8	718	78.2	<u>721</u>	<u>77.9</u>	721	77.9
483.xalancbmk	8	<u>465</u>	<u>119</u>	465	119	466	118	8	<u>465</u>	<u>119</u>	465	119	466	118

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
OMP_NUM_THREADS set to number of cores (default)

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode
The taskset utility was used to bind processes to cores

The Bull NovaScale R440 E1 (Intel Xeon E5440,2.83GHz) and the Bull NovaScale R460 E1 (Intel Xeon E5440,2.83GHz) models are electronically equivalent. The results have been measured on a Bull NovaScale R460 E1 (Intel Xeon E5440,2.83GHz) model.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon E5440,2.83GHz)

SPECint_rate2006 = 125

SPECint_rate_base2006 = 101

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/cpu2006/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon E5440,2.83GHz)

SPECint_rate2006 = 125

SPECint_rate_base2006 = 101

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon E5440,2.83GHz)

SPECint_rate2006 = 125

SPECint_rate_base2006 = 101

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.03.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.03.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:02:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 April 2008.