



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X2200 M2

SPECint®2006 = 14.0
SPECint_base2006 = 12.1

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

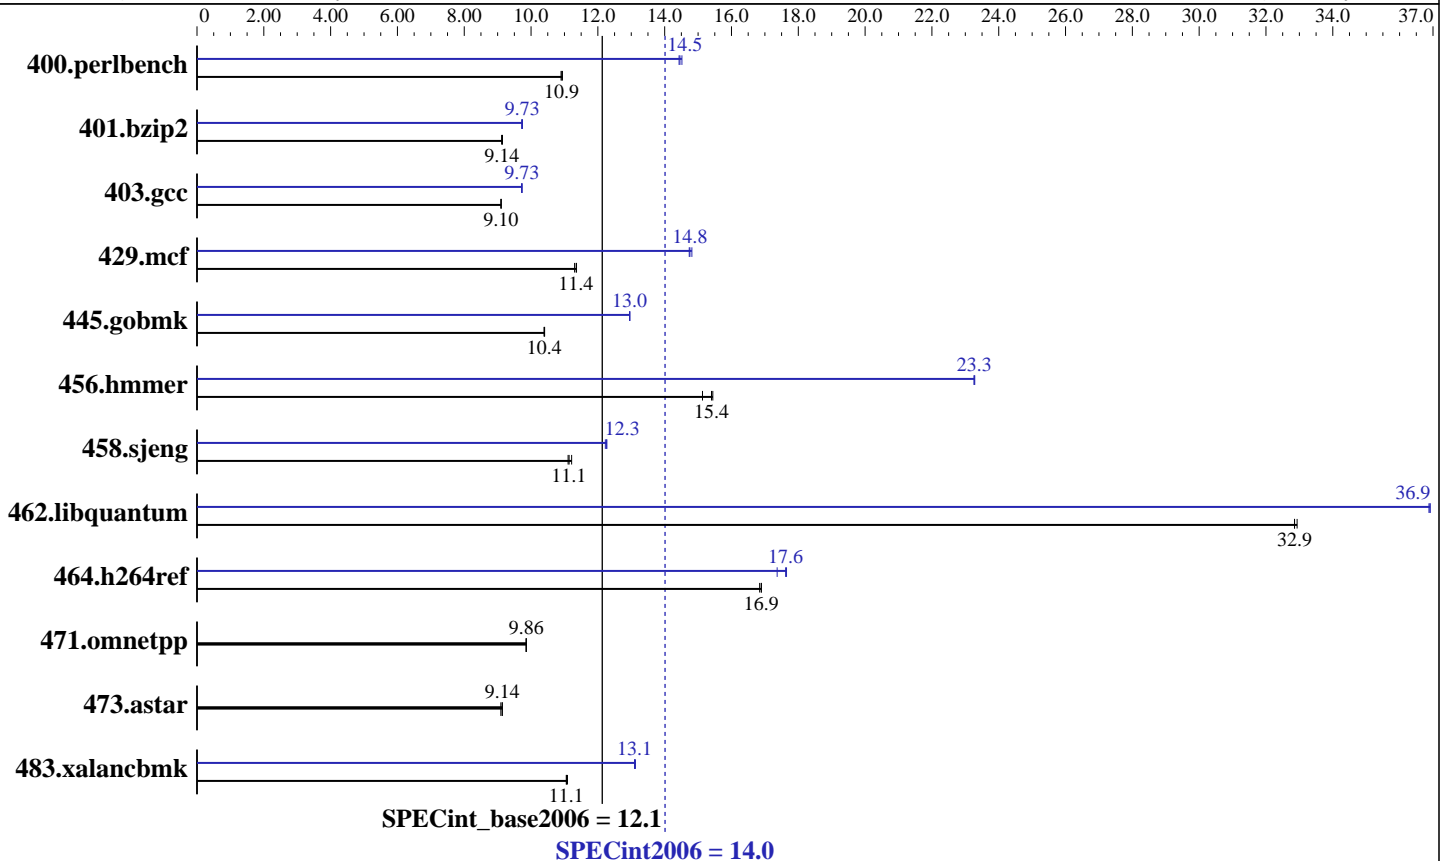

Hardware

CPU Name: AMD Opteron 2356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (16x4GB, DDR2-667, CL5, Reg, Dual Rank)
 Disk Subsystem: SAS, 72 GB, 10 K RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
 Auto Parallel: No
 File System: ext3
 System State: Runlevel 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X2200 M2

SPECint2006 = 14.0
SPECint_base2006 = 12.1

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	895	10.9	893	10.9	896	10.9	676	14.5	677	14.4	673	14.5
401.bzip2	1055	9.14	1056	9.14	1058	9.12	993	9.72	990	9.74	991	9.73
403.gcc	885	9.10	884	9.11	884	9.10	827	9.73	829	9.71	827	9.73
429.mcf	807	11.3	803	11.4	804	11.4	619	14.7	618	14.8	616	14.8
445.gobmk	1008	10.4	1009	10.4	1010	10.4	810	13.0	810	13.0	810	13.0
456.hammer	604	15.4	617	15.1	606	15.4	401	23.3	401	23.3	401	23.3
458.sjeng	1086	11.1	1079	11.2	1089	11.1	987	12.3	986	12.3	990	12.2
462.libquantum	631	32.9	629	32.9	631	32.9	561	36.9	561	36.9	562	36.9
464.h264ref	1310	16.9	1310	16.9	1314	16.8	1254	17.6	1274	17.4	1256	17.6
471.omnetpp	634	9.86	634	9.86	634	9.86	634	9.86	634	9.86	634	9.86
473.astar	768	9.14	772	9.10	768	9.14	768	9.14	772	9.10	768	9.14
483.xalancbmk	624	11.1	622	11.1	624	11.1	526	13.1	527	13.1	527	13.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600' was used to set environment locked pages in memory quantity
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

Default BIOS settings were used.

Base Compiler Invocation

C benchmarks:
pgcc
C++ benchmarks:
pgcpp

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X2200 M2

SPECint2006 = 14.0
SPECint_base2006 = 12.1

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

Base Portability Flags (Continued)

403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -tp barcelona -Bstatic_pgi

Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X2200 M2

SPECint2006 = 14.0
SPECint_base2006 = 12.1

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
-Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline:1
-Msmartalloc=huge:150 -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
-CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
-Mvect=partial -Msafeptr -Mipa=jobs:4 -Mipa=const
-Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64
-Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mpfo(pass 2)
-fastsse -Msmartalloc=huge:150 -Mfprelaxed
-tp barcelona-64 -Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mipa=noarg
-tp barcelona-64 -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=jobs:4(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo=indirect(pass 2) -fastsse -Msmartalloc=huge:150
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X2200 M2

SPECint2006 = 14.0
SPECint_base2006 = 12.1

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes
473.astar: basepeak = yes
483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll_times_max=8
-CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0
-lsmartheap

Peak Other Flags

C benchmarks (except as noted below):

-w

400.perlbench: No flags used
403.gcc: No flags used
445.gobmk: No flags used

C++ benchmarks (except as noted below):

-w

483.xalancbmk: -L/root/work/cpu2006/amd123GH.libs/32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:24:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 June 2008.