SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun SPARC Enterprise M4000

SPECint®_rate2006 = 135

SPECint_rate_base2006 = 118

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Jul-2008
Hardware Availability: Jul-2008
Software Availability: Jul-2008

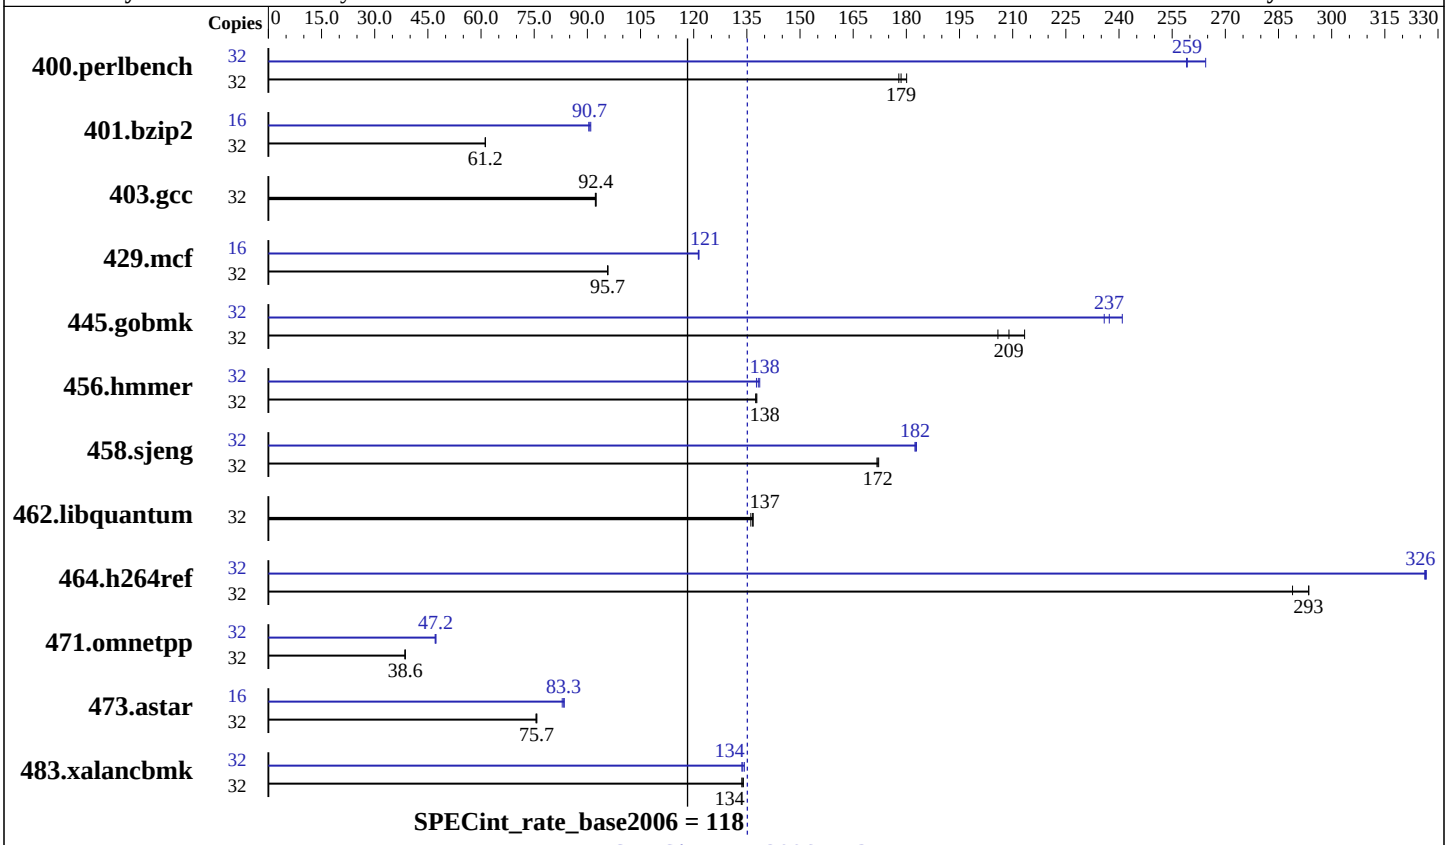

Hardware

CPU Name:	SPARC64 VII
CPU Characteristics:	
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 to 2 CMU; each CMU contains 2 CPU chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	5 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	64 GB (32 x 2 GB)
Disk Subsystem:	591 GB RAID 5 Sun StorageTek 2540 10 x 73 GB 15K RPM Seagate SAS disks
Other Hardware:	None

Software

Operating System:	Solaris 10 5/08 with patch 137111-03
Compiler:	Sun Studio 12 with patches 124867-06, 124861-07, 124863-05 (see patch information below)
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun SPARC Enterprise M4000

SPECint_rate2006 = 135

SPECint_rate_base2006 = 118

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Jul-2008
Hardware Availability: Jul-2008
Software Availability: Jul-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	**1751**	**179**	1736	180	1758	178	32	1182	264	1207	259	**1206**	**259**
401.bzip2	32	**5045**	**61.2**	5047	61.2	5041	61.3	16	**1702**	**90.7**	1708	90.4	1697	91.0
403.gcc	32	2792	92.3	**2787**	**92.4**	2787	92.4	32	2792	92.3	**2787**	**92.4**	2787	92.4
429.mcf	32	3046	95.8	3049	95.7	**3049**	**95.7**	16	**1202**	**121**	1203	121	1201	121
445.gobmk	32	1573	213	1631	206	**1607**	**209**	32	1393	241	1423	236	**1415**	**237**
456.hmmer	32	**2169**	**138**	2171	137	2166	138	32	2168	138	**2160**	**138**	2154	139
458.sjeng	32	**2252**	**172**	2255	172	2249	172	32	2118	183	**2122**	**182**	2122	182
462.libquantum	32	**4853**	**137**	4847	137	4871	136	32	**4853**	**137**	4847	137	4871	136
464.h264ref	32	**2413**	**293**	2412	294	2451	289	32	2168	327	**2169**	**326**	2171	326
471.omnetpp	32	**5181**	**38.6**	5187	38.6	5181	38.6	32	4233	47.3	4251	47.1	**4235**	**47.2**
473.astar	32	2966	75.7	2975	75.5	**2968**	**75.7**	16	1346	83.5	1355	82.9	**1348**	**83.3**
483.xalancbmk	32	**1652**	**134**	1652	134	1647	134	32	**1650**	**134**	1644	134	1653	134

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
Sun Studio compiler patches are available at
    http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp
```

Submit Notes

```
Processes were assigned to specific processors using 'pbind' commands.  The
config file option 'submit' was used, along with a list of processors in the
'BIND' variable, to generate the pbind commands.  (For details, please see
the config file.)
```

Operating System Notes

```
Environment Variable Settings:

ulimit -s 131072 was used to limit the space consumed
    by the stack (making more space available for the heap)

System Tunables (/etc/system parameters):

tune_t_fsflushr=10
    Controls how many seconds elapse between runs of the
    page flush daemon, fsflush.
autoup=600
    Causes pages older than the listed number of seconds to
```

Continued on next page

Operating System Notes (Continued)

```
    be written by fsflush.
bufhwm=3000
    Memory byte limit for caching I/O buffers
segmap_percent=1
    Set maximum percent memory for file system cache

Other System Settings:

The webconsole service was turned off using
    svcadm disable webconsole
```

Platform Notes

```
Memory is 8-way interleaved by filling all slots with
the same capacity DIMMs.

This result is measured on a Sun SPARC Enterprise M4000 Server.
Note that the Sun SPARC Enterprise M4000 and Fujitsu SPARC Enterprise
M4000 are electrically equivalent.
```

Base Compiler Invocation

C benchmarks:
`cc`

C++ benchmarks:
`CC`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_SOLARIS_SPARC`
403.gcc: `-DSPEC_CPU_SOLARIS`
462.libquantum: `-DSPEC_CPU_SOLARIS`
483.xalancbmk: `-DSPEC_CPU_SOLARIS`

Base Optimization Flags

C benchmarks:
`-fast -fma=fused -xipo=2 -xpagesize=4M -xarch=sparcfmaf -xprefetch_level=1 -xalias_level=std -ll2amm`

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
-xdepend -library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M
-xarch=sparcfmaf -xprefetch_level=2 -xalias_level=compatible -lfast

Base Other Flags

C benchmarks:
-xjobs=16 -V -#

C++ benchmarks:
-xjobs=16 -verbose=diags,version

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=std -xipo=2 -xrestrict -fma=fused -lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=strong -fma=fused

403.gcc: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: -fast -xpagesize=4M -xipo=2 -xprefetch=no -xrestrict -xalias_level=std -lfast

445.gobmk: -xprofile=collect:./feedback(pass 1) -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M -xalias_level=std -xrestrict -fma=fused -xarch=sparcfmaf -ll2amm

456.hmmer: -xprofile=collect:./feedback(pass 1) -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M -xipo=2 -fma=fused

458.sjeng: Same as 456.hmmer

462.libquantum: basepeak = yes

464.h264ref: -xprofile=collect:./feedback(pass 1) -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M -xipo=2 -xalias_level=std -xarch=sparcfmaf -xprefetch=no -ll2amm

C++ benchmarks:

471.omnetpp: -xdepend -library=stlport4 -xprofile=collect:./feedback(pass 1) -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M -xalias_level=compatible -xipo=2 -xprefetch_level=2 -Qoption cg -Qlp-av=0 -fma=fused -lfast

473.astar: -xdepend -library=stlport4 -fast -xpagesize=4M -xalias_level=compatible -xipo=2 -xprefetch_level=2 -fma=fused -lfast

483.xalancbmk: -xdepend -library=stlport4 -xprofile=collect:./feedback(pass 1) -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M -xalias_level=compatible -xipo=2 -xprefetch=no -fma=fused -lfast

Peak Other Flags

C benchmarks:
-xjobs=16 -V -#

C++ benchmarks:
-xjobs=16 -verbose=diags,version

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 18:52:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2008.