



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 110

ProLiant DL585 G5
(2.5 GHz AMD Opteron 8360 SE)

SPECint_rate_base2006 = 94.4

CPU2006 license: 3


Test date: Jul-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

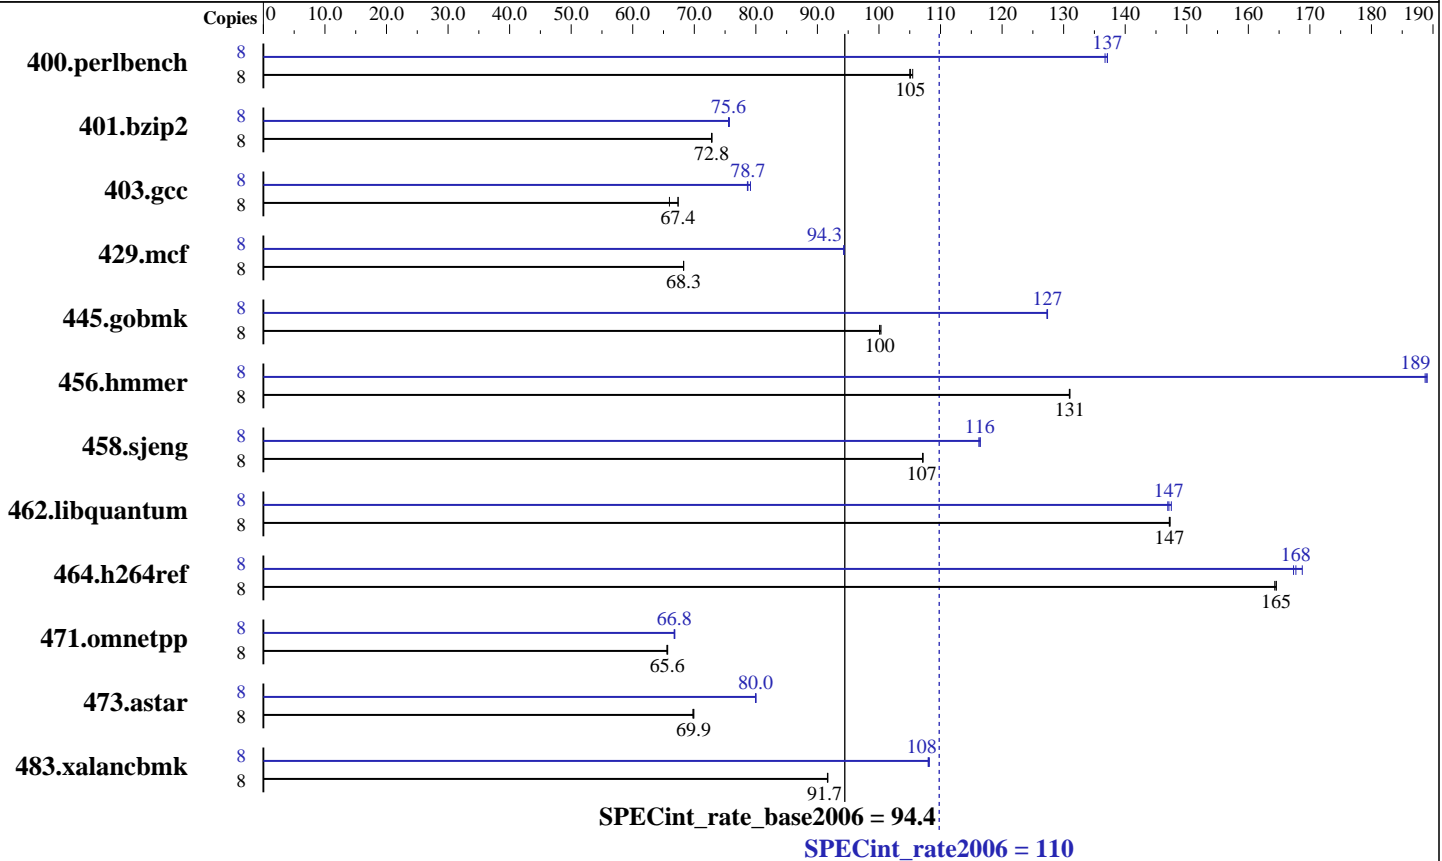

Hardware

CPU Name: AMD Opteron 8360 SE
 CPU Characteristics:
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (16x4 GB, PC2-5300P CL5)
 Disk Subsystem: 1x146 GB 15 K SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Release 3.2
 Auto Parallel: No
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 110

ProLiant DL585 G5
(2.5 GHz AMD Opteron 8360 SE)

SPECint_rate_base2006 = 94.4

CPU2006 license: 3

Test date: Jul-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	744	105	<u>743</u>	<u>105</u>	741	105	8	570	137	572	137	<u>570</u>	<u>137</u>
401.bzip2	8	1060	72.8	<u>1060</u>	<u>72.8</u>	1060	72.9	8	1020	75.7	1022	75.6	<u>1022</u>	<u>75.6</u>
403.gcc	8	<u>956</u>	<u>67.4</u>	976	66.0	956	67.4	8	819	78.6	<u>818</u>	<u>78.7</u>	814	79.1
429.mcf	8	1069	68.3	1069	68.3	<u>1069</u>	<u>68.3</u>	8	<u>774</u>	<u>94.3</u>	774	94.3	774	94.3
445.gobmk	8	<u>838</u>	<u>100</u>	838	100	836	100	8	<u>659</u>	<u>127</u>	659	127	659	127
456.hammer	8	570	131	<u>570</u>	<u>131</u>	570	131	8	396	189	395	189	<u>395</u>	<u>189</u>
458.sjeng	8	904	107	904	107	<u>904</u>	<u>107</u>	8	831	116	<u>832</u>	<u>116</u>	833	116
462.libquantum	8	<u>1126</u>	<u>147</u>	1125	147	1126	147	8	1128	147	<u>1127</u>	<u>147</u>	1124	147
464.h264ref	8	1076	165	1078	164	<u>1076</u>	<u>165</u>	8	<u>1056</u>	<u>168</u>	1058	167	1049	169
471.omnetpp	8	761	65.7	763	65.6	<u>762</u>	<u>65.6</u>	8	748	66.8	<u>749</u>	<u>66.8</u>	749	66.7
473.astar	8	803	69.9	<u>803</u>	<u>69.9</u>	805	69.8	8	702	80.0	<u>702</u>	<u>80.0</u>	703	79.9
483.xalancbmk	8	602	91.7	<u>602</u>	<u>91.7</u>	602	91.6	8	<u>511</u>	<u>108</u>	511	108	510	108

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl used to bind processes to CPUs

Operating System Notes

Environment stack size set to 'unlimited'
Max locked memory set to 2097152
PGI_HUGE_PAGES set to 896.
Total number of huge pages available is 7168.
NCPUS set to number of cores

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 110

ProLiant DL585 G5
(2.5 GHz AMD Opteron 8360 SE)

SPECint_rate_base2006 = 94.4

CPU2006 license: 3

Test date: Jul-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```

-fastsse -Msmartalloc=huge:896 -Mfprelaxed -Mipa=jobs:4 -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

```

-fastsse -Msmartalloc=huge:896 -Mfprelaxed --zc_eh -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona -Bstatic_pgi

```

Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

464.h264ref: pathcc

C++ benchmarks (except as noted below):

pathCC

473.astar: pgcpp

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 110

ProLiant DL585 G5
(2.5 GHz AMD Opteron 8360 SE)

SPECint_rate_base2006 = 94.4

CPU2006 license: 3

Test date: Jul-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Portability Flags (Continued)

445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzp2: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2) -fastsse -O4
-Msmartalloc=huge:896 -Mprefetch=t0 -Mnounroll
-tp barcelona-64 -Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Msmartalloc=huge:896 -Mipa=jobs:4 -Mipa=fast
-Mipa=inline:1 -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge:896
-Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=jobs:4
-Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mpfo(pass 2)
-fastsse -Msmartalloc=huge:896 -Mfprelaxed
-tp barcelona-64 -Bstatic_pgi

462.libquantum: -fastsse -Munroll=m:8 -Msmartalloc=huge:896
-Mprefetch=distance:4 -Mfprelaxed -Mipa=jobs:4 -Mipa=fast
-Mipa=inline -Mipa=noarg -tp barcelona-64 -Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 110

ProLiant DL585 G5
(2.5 GHz AMD Opteron 8360 SE)

SPECint_rate_base2006 = 94.4

CPU2006 license: 3

Test date: Jul-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
-OPT:alias=disjoint -WOPT:if_conv=0 -m32
-L/cpu2006/SmartHeap_8.1/lib -lsmartheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:4(pass 2)
-Mipa=fast(pass 2) -Mipa=inline:6(pass 2) -fastsse -O4
-Msmartalloc=huge:896 -Msafeptr=global -Mfprelaxed --zc_eh
-tp barcelona -Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll_times_max=8
-CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0
-L/cpu2006/SmartHeap_8.1/lib -lsmartheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 18:48:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2008.