



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 140

IBM System x iDataPlex dx360 (Intel Xeon E5472)

SPECint_rate_base2006 = 115

CPU2006 license: 11


Test date: Jul-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

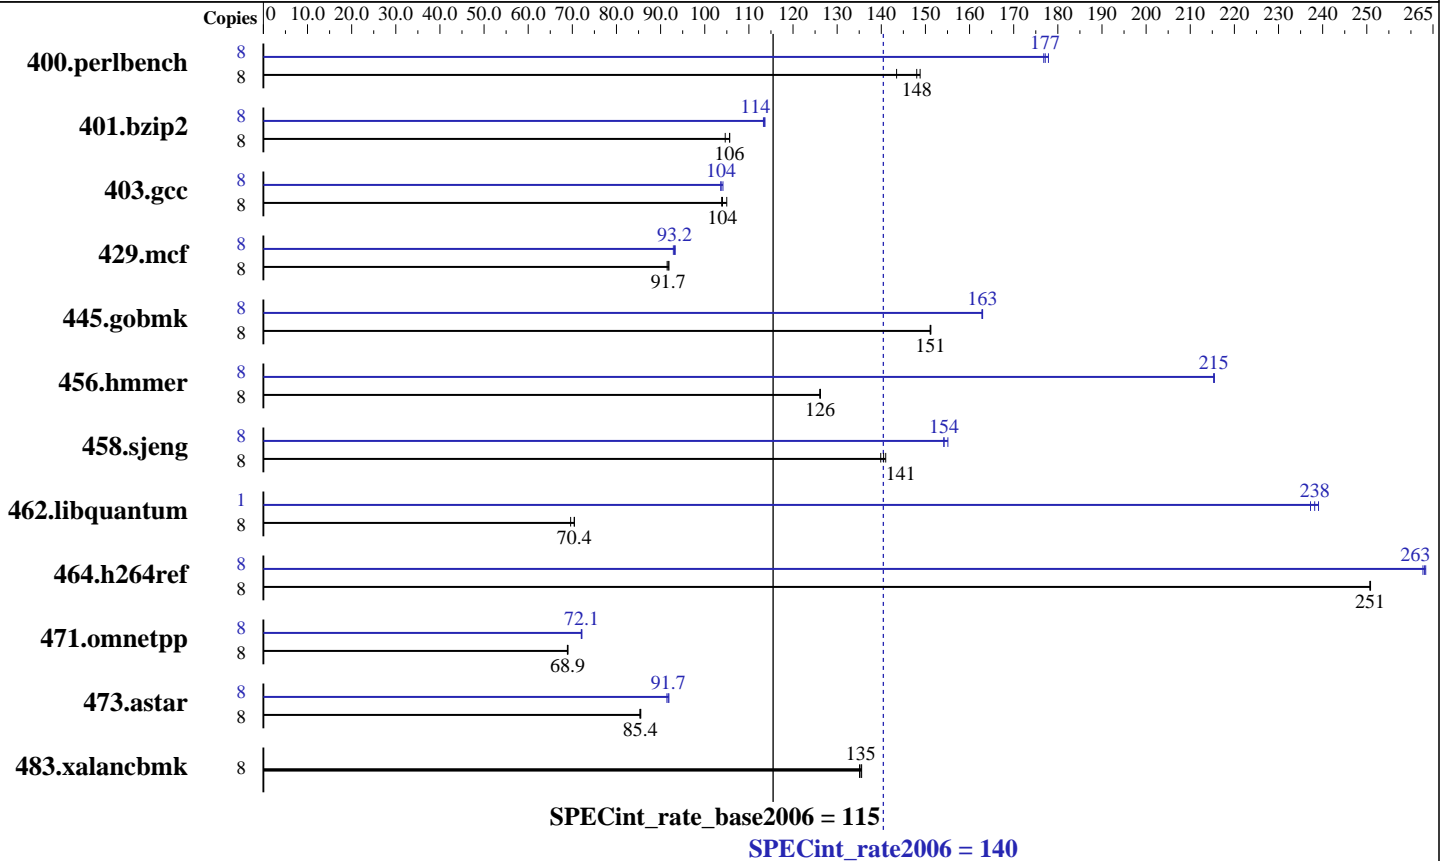

Hardware

CPU Name: Intel Xeon E5472
 CPU Characteristics: 1600MHz system bus
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
 Disk Subsystem: 1 x 160 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap 8.1 Binutils 2.17.50.0.15



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 140

IBM System x iDataPlex dx360 (Intel Xeon E5472)

SPECint_rate_base2006 = 115

CPU2006 license: 11

Test date: Jul-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	545	143	525	149	528	148	8	442	177	441	177	439	178
401.bzip2	8	731	106	738	105	731	106	8	681	113	679	114	680	114
403.gcc	8	620	104	619	104	613	105	8	621	104	618	104	621	104
429.mcf	8	798	91.5	794	91.9	795	91.7	8	783	93.2	785	92.9	782	93.3
445.gobmk	8	555	151	555	151	555	151	8	515	163	515	163	515	163
456.hmmmer	8	592	126	591	126	592	126	8	347	215	347	215	346	215
458.sjeng	8	692	140	686	141	689	141	8	628	154	628	154	624	155
462.libquantum	8	2381	69.6	2353	70.4	2353	70.5	1	86.7	239	87.3	237	87.0	238
464.h264ref	8	706	251	706	251	706	251	8	672	263	673	263	674	263
471.omnetpp	8	726	68.9	724	69.0	726	68.9	8	693	72.1	694	72.0	693	72.1
473.astar	8	657	85.4	657	85.5	658	85.3	8	611	91.9	614	91.4	612	91.7
483.xalancbmk	8	408	135	409	135	407	136	8	408	135	409	135	407	136

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmmer, for peak, are compiled in 64-bit mode
Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Disabled
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
taskset utility used to bind CPU(s) to processes

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 140

IBM System x iDataPlex dx360 (Intel Xeon E5472)

SPECint_rate_base2006 = 115

CPU2006 license: 11

Test date: Jul-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:

-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 140

IBM System x iDataPlex dx360 (Intel Xeon E5472)

SPECint_rate_base2006 = 115

CPU2006 license: 11

Test date: Jul-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090713.html>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 140

IBM System x iDataPlex dx360 (Intel Xeon E5472)

SPECint_rate_base2006 = 115

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:24:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 August 2008.