



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 182

PowerEdge M905 (AMD Opteron 8356, 2.3 GHz)

SPECint_rate_base2006 = 154

CPU2006 license: 55


Test date: Jul-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

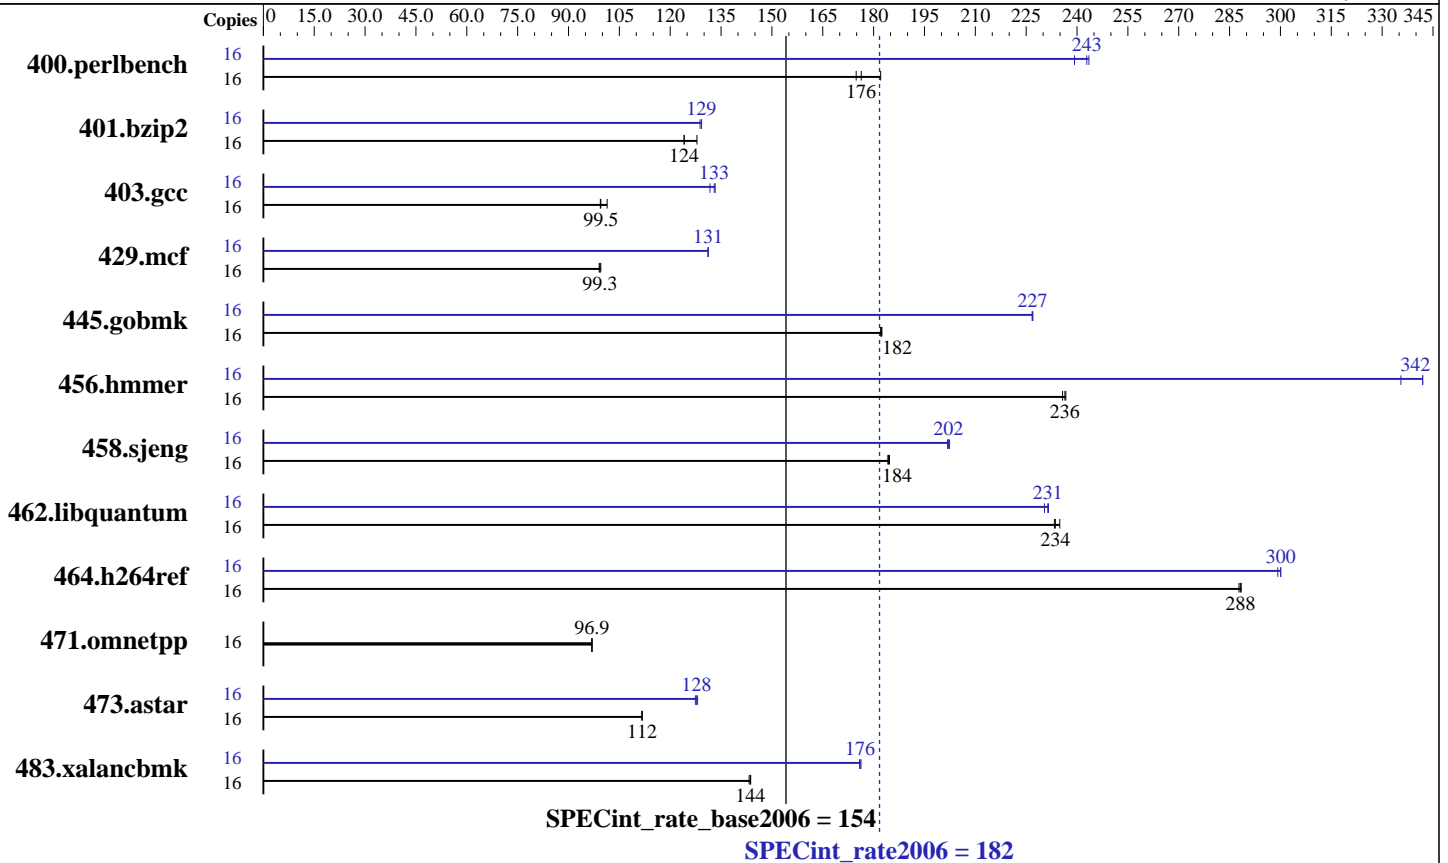

Hardware

CPU Name: AMD Opteron 8356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (16 x 2GB, DDR2-667, CL5)
 Disk Subsystem: 1 x 36 GB SAS 15 K RPM (OS), 1 x 73 GB SAS 10K RPM (CPU2006)
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2
 Kernel 2.6.16-60.0.21-smp
 Compiler: PGI Server Complete Version 7.2
 PathScale Compiler Suite Version 3.1
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 182

PowerEdge M905 (AMD Opteron 8356, 2.3 GHz)

SPECint_rate_base2006 = 154

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2008
Hardware Availability: Aug-2008
Software Availability: May-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	859	182	886	176	894	175	16	653	239	642	244	644	243
401.bzip2	16	1207	128	1244	124	1244	124	16	1199	129	1195	129	1195	129
403.gcc	16	1270	101	1296	99.4	1294	99.5	16	966	133	968	133	978	132
429.mcf	16	1466	99.5	1473	99.1	1470	99.3	16	1112	131	1112	131	1112	131
445.gobmk	16	921	182	922	182	920	182	16	740	227	739	227	740	227
456.hmmer	16	633	236	631	237	631	236	16	445	336	437	342	437	342
458.sjeng	16	1050	184	1048	185	1051	184	16	959	202	957	202	958	202
462.libquantum	16	1421	233	1419	234	1411	235	16	1439	230	1431	232	1433	231
464.h264ref	16	1229	288	1230	288	1228	288	16	1180	300	1183	299	1180	300
471.omnetpp	16	1032	96.9	1032	96.9	1032	96.9	16	1032	96.9	1032	96.9	1032	96.9
473.astar	16	1005	112	1006	112	1005	112	16	882	127	877	128	879	128
483.xalancbmk	16	768	144	771	143	768	144	16	627	176	628	176	626	176

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
mount -t hugetlbfs nodev /mnt/hugepages
'ulimit -l 4915200' was used to set environment locked pages in memory limit
Set vm/nr_hugepages=2400 in /etc/sysctl.conf
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 182

PowerEdge M905 (AMD Opteron 8356, 2.3 GHz)

SPECint_rate_base2006 = 154

CPU2006 license: 55

Test date: Jul-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

Base Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -tp barcelona -Bstatic_pgi

Base Other Flags

C benchmarks:
-w -Mipa=jobs:4

C++ benchmarks:
-w -Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):
pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):
pathCC

471.omnetpp: pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 182

PowerEdge M905 (AMD Opteron 8356, 2.3 GHz)

SPECint_rate_base2006 = 154

CPU2006 license: 55

Test date: Jul-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
           -Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
           -Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=fast -Mipa=inline:1 -Msmartalloc=huge:150
          -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
            -CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
            -Mvect=partial -Msafeptr -Mipa=const -Mipa=ptr -Mipa=arg
            -Mipa=inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline:1(pass 2)
            -Mipa=noarg(pass 2) -Mpfo(pass 2) -fastsse
            -Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
            -Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
                -Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
                -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=fast(pass 2)
              -Mipa=inline(pass 2) -Mpfo=indirect(pass 2) -fastsse
              -Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
              -Bstatic_pgi

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 182

PowerEdge M905 (AMD Opteron 8356, 2.3 GHz)

SPECint_rate_base2006 = 154

CPU2006 license: 55

Test date: Jul-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525
-m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll_times_max=8
-CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0
-lsmartheap

Peak Other Flags

C benchmarks (except as noted below):

-w -Mipa=jobs:4(pass 2)

400.perlbench: No flags used

401.bzip2: -w

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w -Mipa=jobs:4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:26:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 August 2008.