



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810 E1
(Intel Xeon X3320, 2.50 GHz)

SPECfp®_rate2006 = 43.9

SPECfp_rate_base2006 = 41.6

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jul-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

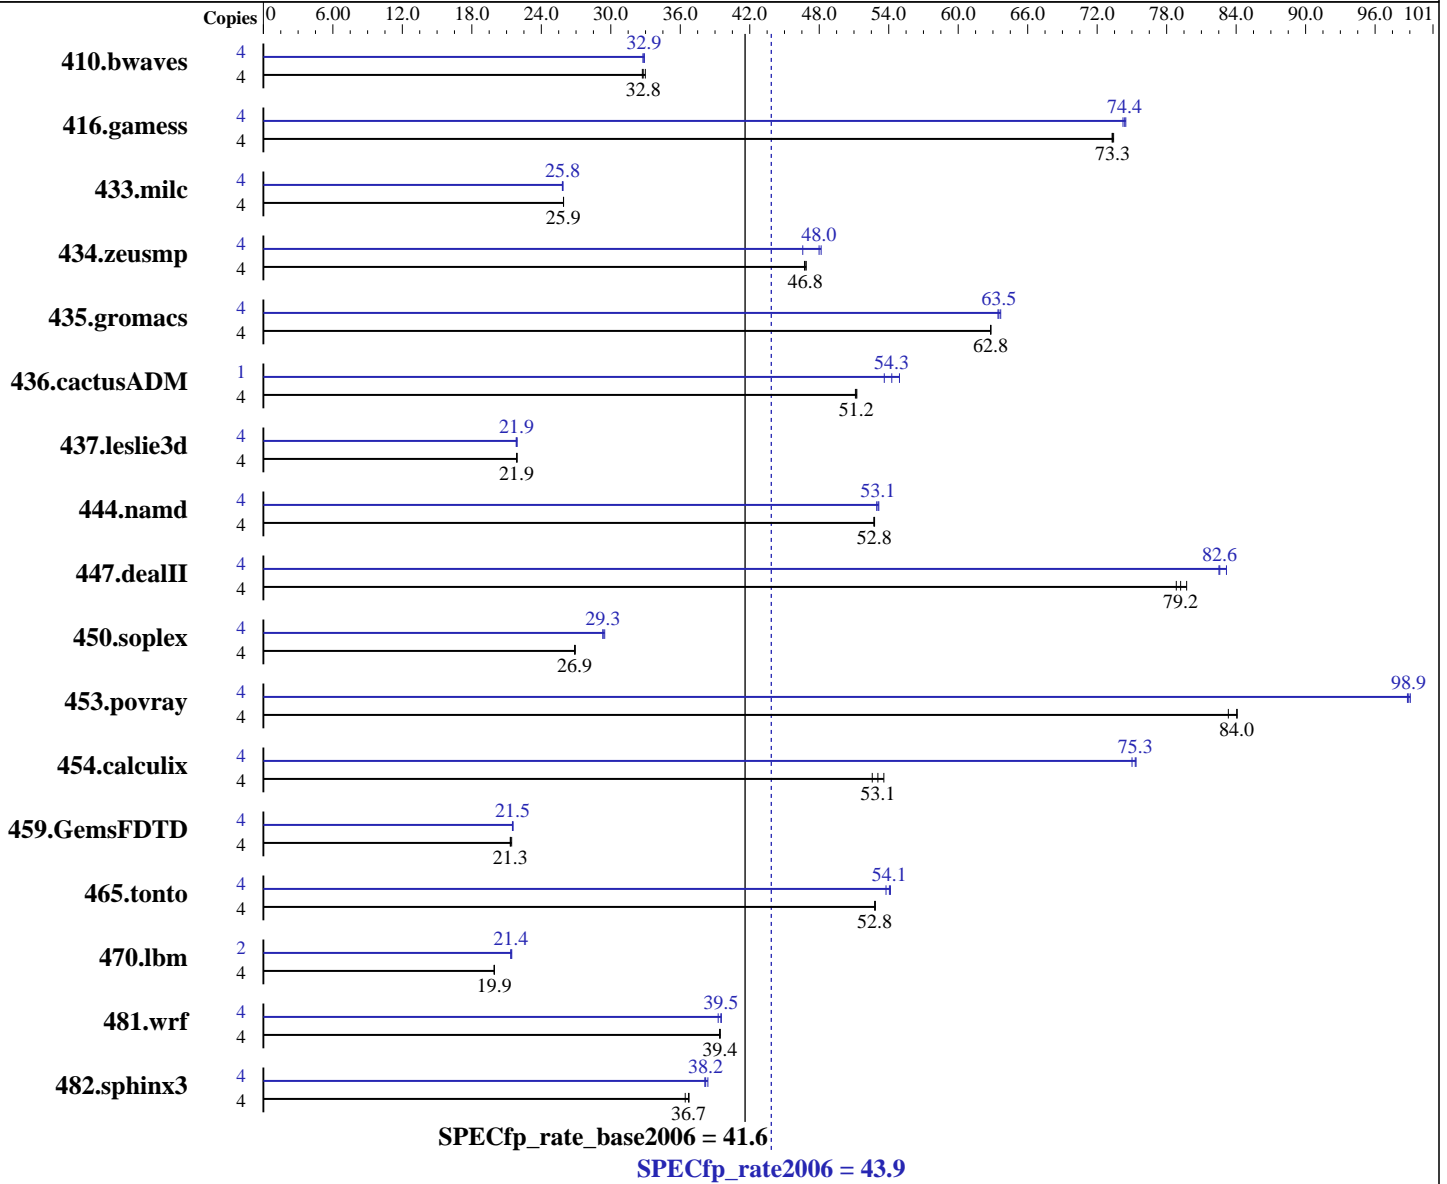

Hardware

CPU Name: Intel Xeon X3320
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip, 3 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE LINUX Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810 E1
(Intel Xeon X3320, 2.50 GHz)

SPECfp_rate2006 = 43.9

SPECfp_rate_base2006 = 41.6

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jul-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 8 GB (4x2 GB) FB-DIMM PC2-6400E ECC CL6
Disk Subsystem: 1x80 GB SATA, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1648	33.0	<u>1657</u>	<u>32.8</u>	1661	32.7	4	1659	32.8	1652	32.9	<u>1654</u>	<u>32.9</u>
416.gamess	4	1067	73.4	1069	73.3	<u>1068</u>	<u>73.3</u>	4	<u>1053</u>	<u>74.4</u>	1052	74.5	1055	74.2
433.milc	4	1416	25.9	<u>1417</u>	<u>25.9</u>	1417	25.9	4	1422	25.8	1419	25.9	<u>1421</u>	<u>25.8</u>
434.zeusmp	4	776	46.9	<u>778</u>	<u>46.8</u>	779	46.7	4	<u>759</u>	<u>48.0</u>	756	48.2	781	46.6
435.gromacs	4	<u>455</u>	<u>62.8</u>	455	62.8	455	62.8	4	<u>450</u>	<u>63.5</u>	450	63.4	449	63.7
436.cactusADM	4	933	51.2	<u>934</u>	<u>51.2</u>	935	51.1	1	<u>220</u>	<u>54.3</u>	218	54.9	223	53.6
437.leslie3d	4	1716	21.9	<u>1718</u>	<u>21.9</u>	1719	21.9	4	<u>1719</u>	<u>21.9</u>	1716	21.9	1722	21.8
444.namd	4	609	52.7	608	52.8	<u>608</u>	<u>52.8</u>	4	606	53.0	604	53.1	<u>604</u>	<u>53.1</u>
447.dealII	4	574	79.7	580	78.8	<u>578</u>	<u>79.2</u>	4	<u>554</u>	<u>82.6</u>	555	82.5	550	83.2
450.soplex	4	1239	26.9	<u>1241</u>	<u>26.9</u>	1241	26.9	4	<u>1137</u>	<u>29.3</u>	1138	29.3	1132	29.5
453.povray	4	253	84.1	255	83.3	<u>253</u>	<u>84.0</u>	4	215	98.8	215	99.0	<u>215</u>	<u>98.9</u>
454.calculix	4	628	52.6	616	53.6	<u>622</u>	<u>53.1</u>	4	440	75.0	<u>438</u>	<u>75.3</u>	438	75.4
459.GemsFDTD	4	<u>1990</u>	<u>21.3</u>	1990	21.3	1979	21.4	4	1973	21.5	1969	21.6	<u>1970</u>	<u>21.5</u>
465.tonto	4	745	52.8	<u>745</u>	<u>52.8</u>	746	52.8	4	727	54.1	<u>728</u>	<u>54.1</u>	732	53.8
470.lbm	4	2757	19.9	2756	19.9	<u>2756</u>	<u>19.9</u>	2	1281	21.4	<u>1284</u>	<u>21.4</u>	1287	21.4
481.wrf	4	<u>1133</u>	<u>39.4</u>	1134	39.4	1133	39.5	4	1138	39.3	<u>1131</u>	<u>39.5</u>	1130	39.5
482.sphinx3	4	2140	36.4	2121	36.8	<u>2123</u>	<u>36.7</u>	4	<u>2041</u>	<u>38.2</u>	2031	38.4	2045	38.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M

General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode
The Bull NovaScale T810 E1(Intel Xeon X3320, 2.50 GHz),
the Bull NovaScale T830 E1(Intel Xeon X3320, 2.50 GHz) and
the Bull NovaScale R410 E1(Intel Xeon X3320, 2.50 GHz) models are electronically equivalent.
The results have been measured on a Bull NovaScale R410 E1(Intel Xeon X3320, 2.50 GHz) model.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810 E1
(Intel Xeon X3320, 2.50 GHz)

SPECfp_rate2006 = 43.9

SPECfp_rate_base2006 = 41.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jul-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810 E1
(Intel Xeon X3320, 2.50 GHz)

SPECfp_rate2006 = 43.9

SPECfp_rate_base2006 = 41.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jul-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib  
-I/opt/intel/fc/10.1.008/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
444.namd: -DSPEC_CPU_LP64  
447.deallI: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep- -prefetch -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810 E1
(Intel Xeon X3320, 2.50 GHz)

SPECfp_rate2006 = 43.9

SPECfp_rate_base2006 = 41.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jul-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/EM64T_Intel101_fp_flags.20090714.html



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810 E1
(Intel Xeon X3320, 2.50 GHz)

SPECfp_rate2006 = 43.9

SPECfp_rate_base2006 = 41.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jul-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/EM64T_Intel101_fp_flags.20090714.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:43:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 September 2008.