



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint®_rate2006 = 102

ACTINA SOLAR 442 S3 (Intel Xeon E7340, 2.4 GHz)

SPECint_rate_base2006 = 86.5

CPU2006 license: 3388


Test date: Aug-2008

Test sponsor: ACTION S.A.

Hardware Availability: Dec-2007

Tested by: ACTION S.A.

Software Availability: Nov-2007

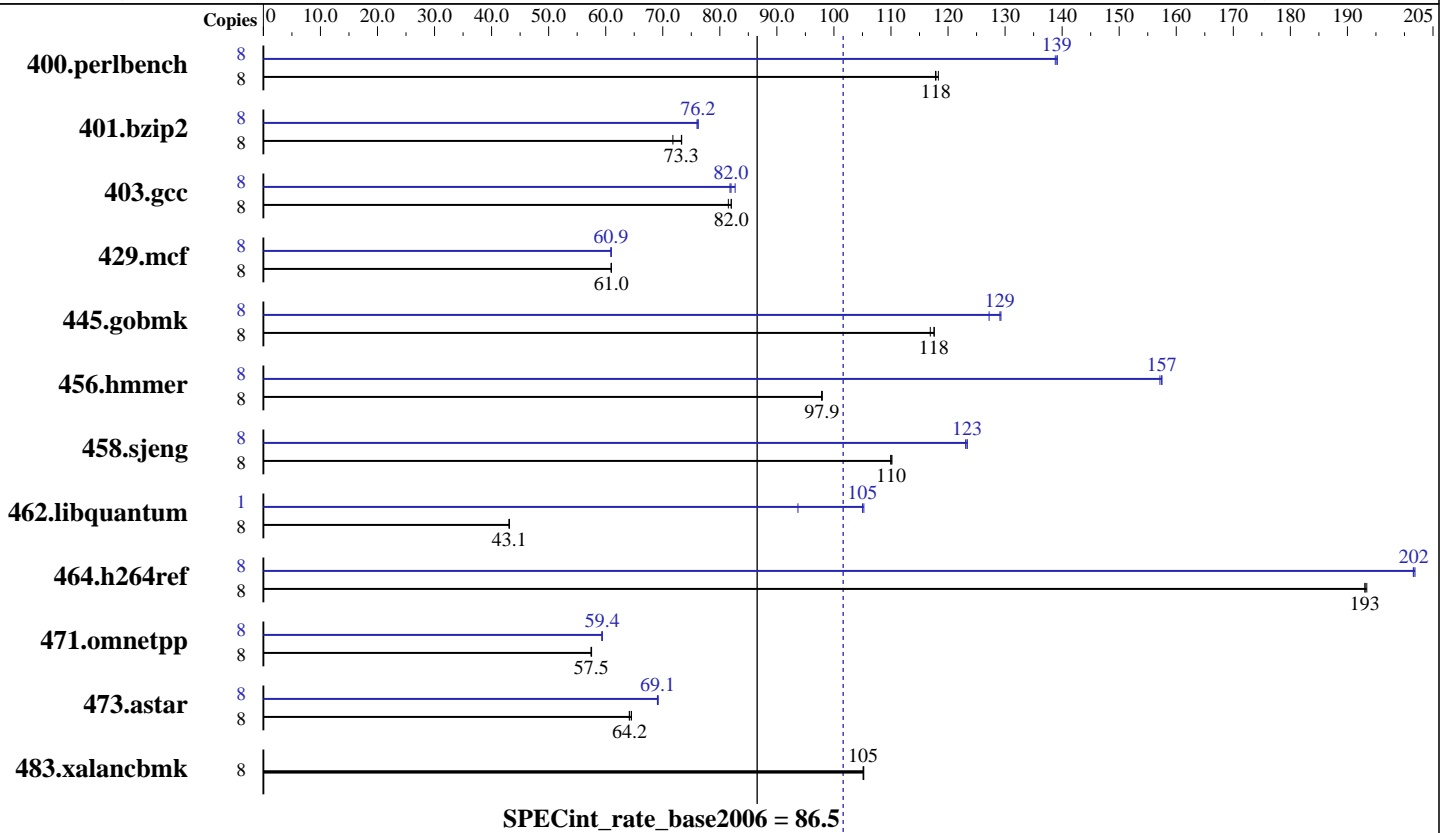

Hardware

CPU Name: Intel Xeon E7340
 CPU Characteristics: 1066 MHz bus
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x 2 GB PC2-5300 ECC FBDIMM)
 Disk Subsystem: 1x 250 GB SATA, 7200RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.17.50.0.15



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 102

ACTINA SOLAR 442 S3 (Intel Xeon E7340, 2.4 GHz)

SPECint_rate_base2006 = 86.5

CPU2006 license: 3388

Test date: Aug-2008

Test sponsor: ACTION S.A.

Hardware Availability: Dec-2007

Tested by: ACTION S.A.

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	663	118	663	118	661	118	8	562	139	562	139	563	139
401.bzip2	8	1054	73.3	1053	73.3	1076	71.8	8	1014	76.2	1016	76.0	1013	76.2
403.gcc	8	785	82.0	785	82.0	790	81.5	8	779	82.7	787	81.8	786	82.0
429.mcf	8	1197	61.0	1197	61.0	1196	61.0	8	1198	60.9	1197	60.9	1197	61.0
445.gobmk	8	714	118	714	118	718	117	8	660	127	650	129	649	129
456.hmmmer	8	762	97.9	762	97.9	763	97.9	8	474	157	475	157	474	157
458.sjeng	8	880	110	879	110	880	110	8	785	123	786	123	785	123
462.libquantum	8	3847	43.1	3844	43.1	3849	43.1	1	197	105	221	93.7	197	105
464.h264ref	8	915	193	917	193	917	193	8	878	202	877	202	878	202
471.omnetpp	8	869	57.5	870	57.5	870	57.4	8	843	59.3	842	59.4	842	59.4
473.astar	8	876	64.1	870	64.5	875	64.2	8	812	69.2	813	69.1	813	69.1
483.xalanbmk	8	525	105	525	105	525	105	8	525	105	525	105	525	105

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmmer, for peak, are compiled in 64-bit mode.
 Taskset command was used to bind processes to CPUs.
 'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 OMP_NUM_THREADS set to 4

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalanbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 102

ACTINA SOLAR 442 S3 (Intel Xeon E7340, 2.4 GHz)

SPECint_rate_base2006 = 86.5

CPU2006 license: 3388

Test date: Aug-2008

Test sponsor: ACTION S.A.

Hardware Availability: Dec-2007

Tested by: ACTION S.A.

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:

`-fast -inline-calloc -opt-malloc-options=3`

C++ benchmarks:

`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc`

`401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include`

`456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include`

C++ benchmarks:

`icpc`

Peak Portability Flags

`400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 102

ACTINA SOLAR 442 S3 (Intel Xeon E7340, 2.4 GHz)

SPECint_rate_base2006 = 86.5

CPU2006 license: 3388

Test date: Aug-2008

Test sponsor: ACTION S.A.

Hardware Availability: Dec-2007

Tested by: ACTION S.A.

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090714.00.html>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 102

ACTINA SOLAR 442 S3 (Intel Xeon E7340, 2.4 GHz)

SPECint_rate_base2006 = 86.5

CPU2006 license: 3388

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Aug-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090714.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:42:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 September 2008.